A

Bulkhead
SSKK-12



Thread	Dimensions (mm/in)		Weight (kg/lbs) ca.	Ordering Codes (Standard Option)
T	h	Hex	per 100	
S12[1]	63	19	10,30	SSKK-12-B-W3
	2.48	0.75	22.66	

[1] Special thread: buttress thread S12,65 x1,5
Standard option: With Hexagon Lock Nut.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

***SSKK*-12*-B*-SK*-W3**

* Type	Bulkhead with Piston Valve	**SSKK**
* Series	STAUFF Test 12 (Connection Thread S12,65 x 1,5)	**-12**
* Seal Material	NBR (Buna-N®)	**-B**
	FKM/FPM (Viton®)	**-V**
	EPDM	**-E**
* Protection Cap	Knurled protection cap	**–**
	Hexagonal protection cap	**-SK**
* Material Code	Steel, zinc/nickel-plated	**-W3**
	Stainless Steel V2A - 1.4305 (AISI 303)	**-W4**
	Stainless Steel V4A - 1.4571 (AISI 316 Ti)	**-W5**

Swivel Run Tee with 37° JIC Connection
SGV-JIC Type FM

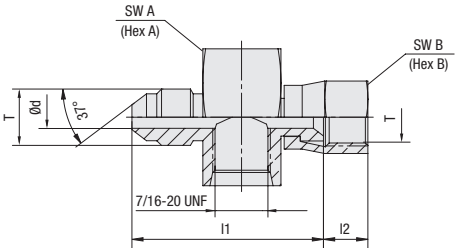

Pipe Ø	JIC-Size	Dimensions (mm/in)					Thread T	Weight (kg/lbs) ca.	Ordering Codes (Standard Option)
inch		Ø d	l1	l2	Hex A	Hex B	inch	per 100	
1/4	04	4,37	37,74	8,74	27	14,29	7/16–20 UNF	8,96	SGV-7/16UNF-04-JIC1/4-FM-W66
		.17	1.49	.34	1.06	.56		19.71	
3/8	06	7,54	40,01	9,53	27	17,46	9/16–18 UNF	9,60	SGV-7/16UNF-06-JIC3/8-FM-W66
		.30	1.58	.38	1.06	.69		21.12	
1/2	08	9,93	44,65	10,72	27	22,23	3/4–16 UNF	11,20	SGV-7/16UNF-08-JIC1/2-FM-W66
		.39	1.76	.42	1.06	.88		24.64	
5/8	10	12,29	48,26	12,70	28,58	25,40	7/8–14 UNF	17,10	SGV-7/16UNF-10-JIC1/2-FM-W66
		.48	1.90	.50	1.13	1.00		37.62	
3/4	12	15,47	51,33	14,45	31,75	31,75	1-1/16–12 UN	20,40	SGV-7/16UNF-12-JIC3/4-FM-W66
		.61	2.02	.57	1.25	1.25		44.88	
1	16	21,44	57,30	15,09	38,10	38,10	1-5/16–12 UN	30,80	SGV-7/16UNF-16-JIC1-FM-W66
		.84	2.26	.59	1.50	1.50		67.76	

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

***SGV*-7/16UNF*-12*-JIC3/4*-FM*-W66**

* Type	Swivel Run Tee	**SGV**
* Port Connection	acc. to dimension table	**-7/16UNF**
* JIC Size	acc. to dimension table	**-12**
* Connection	37° JIC Connection	**-JIC**
* Outside Tube Diameter	acc. to dimension table	**3/4**
* Connection	Female/Male Thread	**-FM**
* Material Code	Steel, zinc plated and Thick-layer passivated	**-W66**

Dimensional drawings: All dimensions in mm (in).