


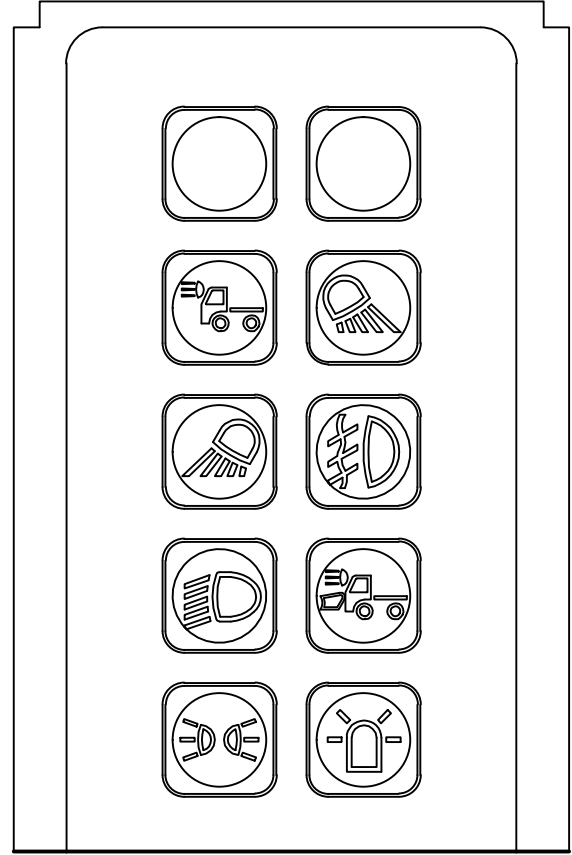
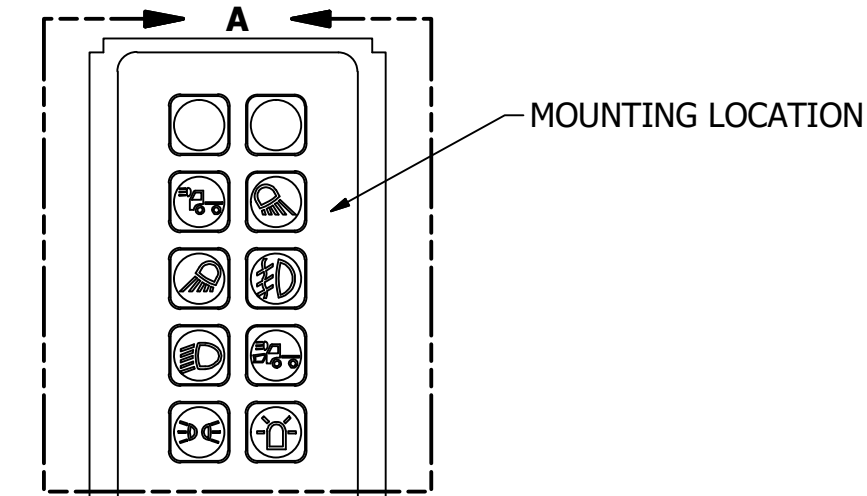


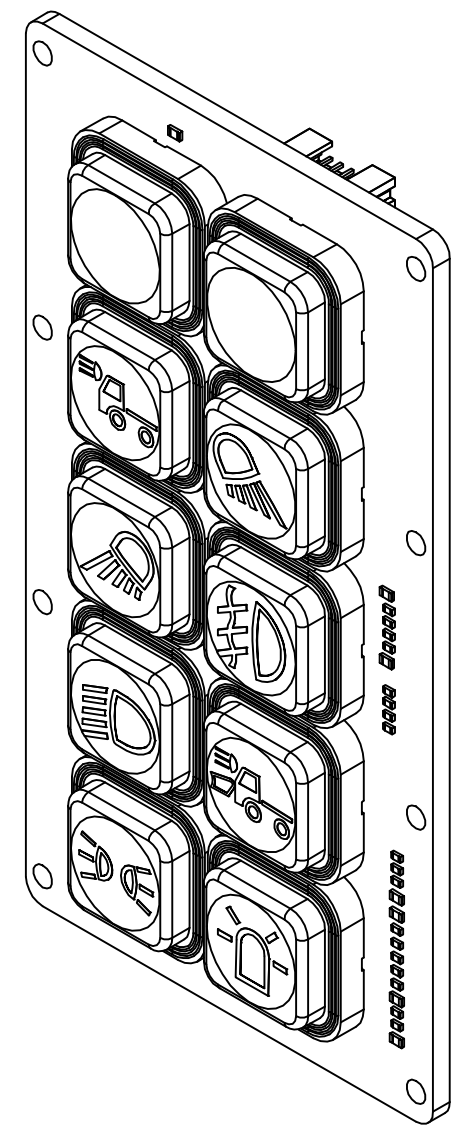

| 2 | 1 | 1 | 1 | 1 |
|--|----------------|--------------|------------------|-----------------------|
| BUTTONS | COMMAND SIGNAL | CONNECTOR | MATING CONNECTOR | INSTALLATION LOCATION |
| 10 BUTTON 2 BY 5 VERTICAL CONFIGURATION SWITCH PANEL | CAN J1939 | DT04-4P-C015 | DT06-6S-C015 | CAB |

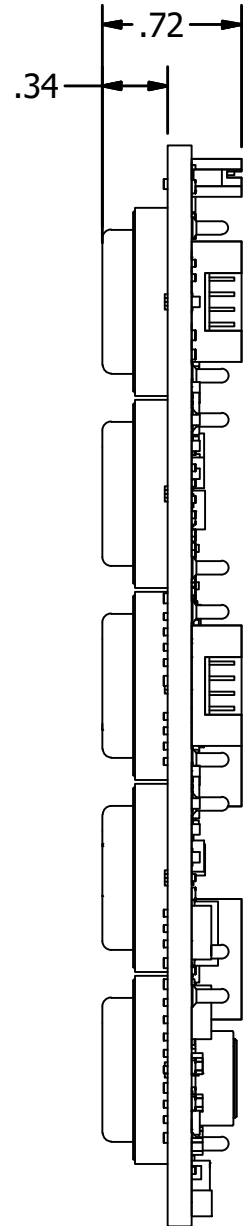

**DETAIL A
SCALE 3:4**

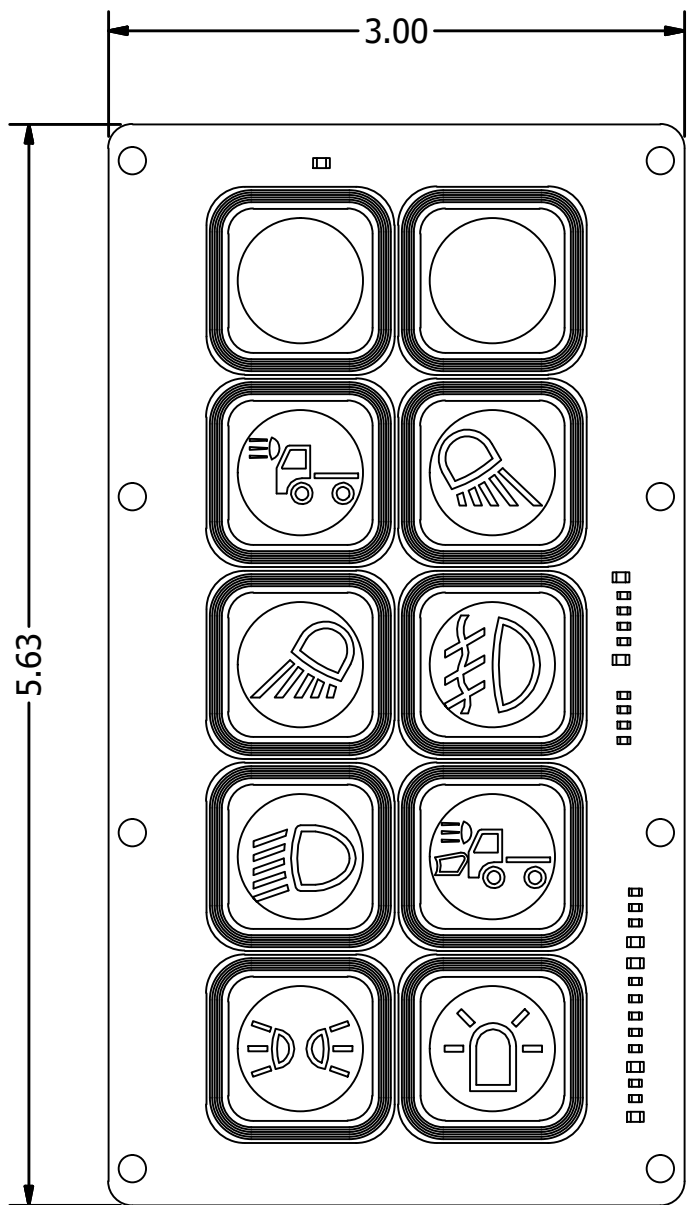

| | | | | | |
|---|-----------|---|--|---|--|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | ORIGINATED BY: KJOHNSON | |  GLOBAL RESOURCES MUKWONAGO, WI 53149 | |
| WIRE LENGTH TOLERANCES SPEC = IPC/WHMA-A-620B | | ORIGINATION DATE: 7-10-2019 | | | |
| ≤ 1ft | +1in -0in | THIRD ANGLE PROJECTION | | DRAWING TITLE: 10 PUSH BUTTON 2 BY 5 LAYOUT SWITCH PANEL | |
| > 1ft-5ft | +2in -0in |  | | PROJECT ENGINEER: | |
| > 5ft-10ft | +4in -0in | | | ACCOUNT MANAGER: | |
| > 10ft-25ft | +6in -0in | MATERIAL: | | CUSTOMER PART NUMBER: | |
| > 25ft | +5% -0% | COATING/PLATING: | | SHEET INFO: B GS17122-050 A | |
| FRACTIONS ± 1/16in ± 1.59mm | | TOLERANCES ON DECIMALS: | | ALL TECHNICAL DATA ON THIS DRAWING IS THE PROPERTY OF GS GLOBAL RESOURCES INC. AND SHALL NOT BE USED BY OTHERS FOR MANUFACTURE, PROCUREMENT, OR DISCLOSURE WITHOUT THE WRITTEN PERMISSION OF GS GLOBAL RESOURCES INC. | |
| 1 PLACE 2 PLACE 3 PLACE | | in ± .030 ± .010 ± .005 | | SCALE: 1 | |
| mm ± .76 ± .25 ± .13 | | ANGULAR DIMENSIONS ± 1 DEG | | SHEET INFO: 1 OF 1 | |
| REMOVE BURRS | | BREAK EDGES 0.01in 0.25mm MAX | | | |
| MAX SURFACE ROUGHNESS 12.5 | | | | | |

TITLE BLOCK REVISION DATE: 10-9-2018