

- MOLDED PLASTIC TOP AND BOTTOM
- SINGLE AXIS DRIVE JOYSTICK
- OPTIONAL RAM MOUNT AND DISPLAY CONNECTOR
- CUSTOM CAN J1939 SWITCH PANEL
- BACKLIGHT AROUND UPPER SWITCH PANEL
- ALLISON TRANSMISSION CONTROL BUILT IN
- ELECTRONICS ENCLOSED INSIDE


FULL SIZE JOYSTICK

12V OUTLET

DUAL USB OUTLET

CUP HOLDER

**DETAIL A  
SCALE 3:16**

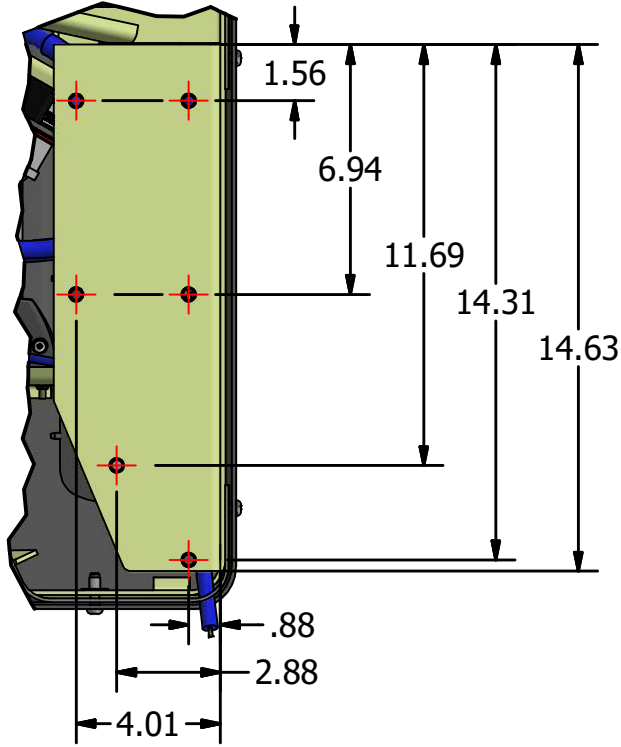

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINATED BY: KJOHNSON	 <b>GLOBAL RESOURCES</b> MUKWONAGO, WI 53149
WIRE LENGTH TOLERANCES SPEC = IPC/WHMA-A-620B		ORIGINATION DATE: 7-16-2019	
≤ 1ft +1in -0in	THIRD ANGLE PROJECTION	PROJECT ENGINEER:	DRAWING TITLE: RIGHT ARMREST WITH SINGLE AXIS JOYSTICK
> 1ft-5ft +2in -0in		ACCOUNT MANAGER:	
> 5ft-10ft +4in -0in		MATERIAL:	
> 10ft-25ft +6in -0in		COATING/PLATING:	
> 25ft +5% -0%		CUSTOMER PART NUMBER:	
FRACTIONS ± 1/16in ± 1.59mm		ALL TECHNICAL DATA ON THIS DRAWING IS THE PROPERTY OF GS GLOBAL RESOURCES INC. AND SHALL NOT BE USED BY OTHERS FOR MANUFACTURE, PROCUREMENT, OR DISCLOSURE WITHOUT THE WRITTEN PERMISSION OF GS GLOBAL RESOURCES INC.	
TOLERANCES ON DECIMALS:		SHT SIZE: B	DRAWING NUMBER: GS19090-011
1 PLACE ±.030	2 PLACE ±.010	3 PLACE ±.005	REV: A
in ±.030	mm ±.25	mm ±.13	DRAWING REFERENCE: SCALE: 5:32 SHEET INFO: 1 OF 1
ANGULAR DIMENSIONS ± 1 DEG			
REMOVE BURRS			
BREAK EDGES 0.01in 0.25mm MAX			
MAX SURFACE ROUGHNESS 12.5			

TITLE BLOCK REVISION DATE: 10-9-2018