

Q16 series

Ø16 mm panel mount LED indicators



DISTINCTIVE FEATURES

Secret until lit polycarbonate decals or custom engraving
10 mm colored diffused epoxy lens or 10 mm water clear super bright LEDs
(2.8 x 0.8) solder lug/faston terminals, pins or (200 mm long) wire terminations



ENVIRONMENTAL SPECIFICATIONS

- IP67 sealing option (EN60529)
- Operating & Storage Temperature Range:
Rear plastic body: -30 ° C to +65° C (-22 °F to +149 °F)
Rear epoxy body: -40 ° C to +85° C (-40 °F to +185 °F)



GENERAL SPECIFICATIONS

- Max Reverse Voltage: 5 V
- Viewing Angle: 30–100° (dependant on model)
- Life Expectancy: 100,000 hours
- Torque: 75 cNm (dependent on option)
- Maximum panel thickness 11 mm




MATERIALS

- Plated brass bezel finished in bright chrome, black chrome or satin grey and moulded polycarbonate rear body



MOUNTING

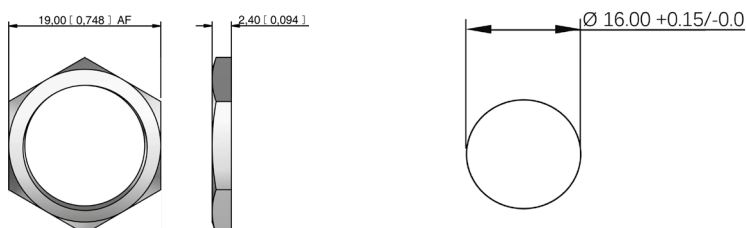

Q16 series

Ø16 mm panel mount LED indicators



ELECTRICAL SPECIFICATIONS

STANDARD LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	80 mcd	10 mcd	2.0 V
Green	60 mcd	5 mcd	2.2 V
Yellow	50 mcd	4 mcd	2.1 V
Blue	540 mcd	100 mcd	3.3 V
White	1,000 mcd	150 mcd	3.3 V
Orange	80 mcd	200 mcd	2.2 V
Bi-color (Typical) (Red/Green)	15/15 mcd	14/10 mcd	2.0 V/2.2 V
Tri-color (Typical) (Red/Green/Yellow)	60/50/50 mcd	15/10/30 mcd	2.0 V/2.2 V/2.1 V

Bi-color - The color is changed by reversing the polarity of the supply voltage.
Tri-color - The indicator has red and green LEDs, when both connected yellow is produced.

SUPER BRIGHT LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	17,000 mcd	2000 mcd	2.2 V
Green	11,000 mcd	680 mcd	3.5 V
Yellow	4,000 mcd	350 mcd	2.3 V
Blue	2,500 mcd	250 mcd	3.3 V
White	4,400 mcd	250 mcd	3.3 V
Orange	2,800 mcd	300 mcd	2.1 V

HYPER BRIGHT LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	2,800 mcd	800 mcd	2.0 V
Green	2,200 mcd	250 mcd	3.2 V
Yellow	1,300 mcd	250 mcd	2.0 V
Orange	850 mcd	200 mcd	2.1 V

- The operating voltage must not be exceeded by more than 10% as this will result in reduced life expectancy
- Luminous intensity is measured at 20 mA on a discrete led unless otherwise stated.
- Luminous intensities and color shades of white LEDs may vary within a batch.
- Luminous intensity will be reduced with lower operating current.

Voltage	Operating Voltage	Operating Current
	(Min to Max)	(Typical All Types)
02 (No Resistor)	1.8 to 3.3 VDC	20 mA max*
6 VDC	5.4 to 6.6 VDC	20 mA
12 VDC	10.8 to 13.2 VDC	20 mA
24 VDC	21.6 to 26.4 VDC	20 mA
28 VDC	25.2 to 30.8 VDC	20 mA
110 VAC	99 to 121 VAC	6 mA
220 VAC	207 to 235 VAC	3 mA

* Customer to supply resistor for desired operating current.

ADDITIONAL INFORMATION ON LED COMPONENTS

- Bi-color leds, by connecting the gold faston (+) one color is produced, by reversing the supply voltage another color is produced – bi-colors are available up to 28 VDC
- The tri-color led has red and green leds when both are connected yellow is produced

Q16 series

Ø16 mm panel mount LED indicators



BUILD YOUR PART NUMBER

Q																																																																			
SERIES	MOUNTING HOLE	BEZEL STYLE	TERMINALS	BEZEL FINISH	TYPE OF ILLUMINATION																																																														
	16 Ø16 mm	<table border="0"> <tr> <td colspan="2" style="text-align: center;">Metal</td> </tr> <tr> <td style="text-align: center;">P</td> <td>Prominent</td> </tr> <tr> <td style="text-align: center;">R</td> <td>Recessed</td> </tr> <tr> <td style="text-align: center;">F</td> <td>Flush</td> </tr> <tr> <td colspan="2" style="text-align: center;">Plastic</td> </tr> <tr> <td style="text-align: center;">PP</td> <td>Prominent</td> </tr> <tr> <td style="text-align: center;">FP</td> <td>Flush</td> </tr> </table>	Metal		P	Prominent	R	Recessed	F	Flush	Plastic		PP	Prominent	FP	Flush	<table border="0"> <tr> <td style="text-align: center;">1</td> <td>Solder Lug/ Fastons (2.8 x 0.8)</td> </tr> <tr> <td style="text-align: center;">2</td> <td>Pins</td> </tr> <tr> <td style="text-align: center;">3</td> <td>Wires</td> </tr> <tr> <td style="text-align: center;">4</td> <td>Rear epoxy Pins</td> </tr> <tr> <td style="text-align: center;">5</td> <td>Rear epoxy wires</td> </tr> <tr> <td style="text-align: center;">6</td> <td>Short body pins</td> </tr> <tr> <td style="text-align: center;">7</td> <td>Short body wires</td> </tr> </table>	1	Solder Lug/ Fastons (2.8 x 0.8)	2	Pins	3	Wires	4	Rear epoxy Pins	5	Rear epoxy wires	6	Short body pins	7	Short body wires	<table border="0"> <tr> <td colspan="2" style="text-align: center;">Metal</td> </tr> <tr> <td style="text-align: center;">C</td> <td>Bright chrome</td> </tr> <tr> <td style="text-align: center;">B</td> <td>Black chrome</td> </tr> <tr> <td style="text-align: center;">G</td> <td>Satin grey</td> </tr> <tr> <td colspan="2" style="text-align: center;">Plastic</td> </tr> <tr> <td style="text-align: center;">BP</td> <td>Black</td> </tr> </table>	Metal		C	Bright chrome	B	Black chrome	G	Satin grey	Plastic		BP	Black	<table border="0"> <tr> <td style="text-align: center;">XX</td> <td>Fixed light</td> </tr> <tr> <td style="text-align: center;">KK</td> <td>Flashing light (12 V – 28 VDC)</td> </tr> <tr> <td style="text-align: center;">YY</td> <td>Bi-color</td> </tr> <tr> <td style="text-align: center;">ZZ</td> <td>Tri-color</td> </tr> </table>	XX	Fixed light	KK	Flashing light (12 V – 28 VDC)	YY	Bi-color	ZZ	Tri-color														
Metal																																																																			
P	Prominent																																																																		
R	Recessed																																																																		
F	Flush																																																																		
Plastic																																																																			
PP	Prominent																																																																		
FP	Flush																																																																		
1	Solder Lug/ Fastons (2.8 x 0.8)																																																																		
2	Pins																																																																		
3	Wires																																																																		
4	Rear epoxy Pins																																																																		
5	Rear epoxy wires																																																																		
6	Short body pins																																																																		
7	Short body wires																																																																		
Metal																																																																			
C	Bright chrome																																																																		
B	Black chrome																																																																		
G	Satin grey																																																																		
Plastic																																																																			
BP	Black																																																																		
XX	Fixed light																																																																		
KK	Flashing light (12 V – 28 VDC)																																																																		
YY	Bi-color																																																																		
ZZ	Tri-color																																																																		
	LED COLOR		VOLTAGE	SEALING	CUSTOM OPTIONS																																																														
<table border="0"> <tr> <td style="text-align: center;">R</td> <td>Red</td> </tr> <tr> <td style="text-align: center;">G</td> <td>Green</td> </tr> <tr> <td style="text-align: center;">Y</td> <td>Yellow</td> </tr> <tr> <td style="text-align: center;">B</td> <td>Blue</td> </tr> <tr> <td style="text-align: center;">W</td> <td>White</td> </tr> <tr> <td style="text-align: center;">O</td> <td>Orange</td> </tr> <tr> <td style="text-align: center;">HR</td> <td>Hyper bright Red</td> </tr> </table>	R	Red	G	Green	Y	Yellow	B	Blue	W	White	O	Orange	HR	Hyper bright Red	<table border="0"> <tr> <td style="text-align: center;">HG</td> <td>Hyper bright green</td> </tr> <tr> <td style="text-align: center;">HY</td> <td>Hyper bright yellow</td> </tr> <tr> <td style="text-align: center;">HO</td> <td>Hyper bright orange</td> </tr> <tr> <td style="text-align: center;">SR</td> <td>Super bright Red</td> </tr> <tr> <td style="text-align: center;">SG</td> <td>Super bright green</td> </tr> <tr> <td style="text-align: center;">SY</td> <td>Super bright yellow</td> </tr> </table>	HG	Hyper bright green	HY	Hyper bright yellow	HO	Hyper bright orange	SR	Super bright Red	SG	Super bright green	SY	Super bright yellow	<table border="0"> <tr> <td style="text-align: center;">SB</td> <td>Super bright blue</td> </tr> <tr> <td style="text-align: center;">SW</td> <td>Super bright white</td> </tr> <tr> <td style="text-align: center;">RG</td> <td>Red/green</td> </tr> <tr> <td style="text-align: center;">RY</td> <td>Red/yellow</td> </tr> <tr> <td style="text-align: center;">GY</td> <td>Green/yellow</td> </tr> <tr> <td style="text-align: center;">RYG</td> <td>Red/yellow/green</td> </tr> </table>	SB	Super bright blue	SW	Super bright white	RG	Red/green	RY	Red/yellow	GY	Green/yellow	RYG	Red/yellow/green	<table border="0"> <tr> <td style="text-align: center;">02</td> <td>no resistor*</td> </tr> <tr> <td style="text-align: center;">06</td> <td>6 VDC</td> </tr> <tr> <td style="text-align: center;">12</td> <td>12 VDC</td> </tr> <tr> <td style="text-align: center;">12A</td> <td>12 VAC/DC</td> </tr> <tr> <td style="text-align: center;">24</td> <td>24 VDC</td> </tr> <tr> <td style="text-align: center;">24A</td> <td>24 VAC/DC</td> </tr> <tr> <td style="text-align: center;">28</td> <td>28 VDC</td> </tr> <tr> <td style="text-align: center;">28A</td> <td>28 VAC/DC</td> </tr> <tr> <td style="text-align: center;">110</td> <td>110 VAC</td> </tr> <tr> <td style="text-align: center;">220</td> <td>220 VAC</td> </tr> </table>	02	no resistor*	06	6 VDC	12	12 VDC	12A	12 VAC/DC	24	24 VDC	24A	24 VAC/DC	28	28 VDC	28A	28 VAC/DC	110	110 VAC	220	220 VAC	<table border="0"> <tr> <td style="text-align: center;">(Blank)</td> <td>Unsealed</td> </tr> <tr> <td style="text-align: center;">E</td> <td>IP67</td> </tr> </table>	(Blank)	Unsealed	E	IP67	See end of series
R	Red																																																																		
G	Green																																																																		
Y	Yellow																																																																		
B	Blue																																																																		
W	White																																																																		
O	Orange																																																																		
HR	Hyper bright Red																																																																		
HG	Hyper bright green																																																																		
HY	Hyper bright yellow																																																																		
HO	Hyper bright orange																																																																		
SR	Super bright Red																																																																		
SG	Super bright green																																																																		
SY	Super bright yellow																																																																		
SB	Super bright blue																																																																		
SW	Super bright white																																																																		
RG	Red/green																																																																		
RY	Red/yellow																																																																		
GY	Green/yellow																																																																		
RYG	Red/yellow/green																																																																		
02	no resistor*																																																																		
06	6 VDC																																																																		
12	12 VDC																																																																		
12A	12 VAC/DC																																																																		
24	24 VDC																																																																		
24A	24 VAC/DC																																																																		
28	28 VDC																																																																		
28A	28 VAC/DC																																																																		
110	110 VAC																																																																		
220	220 VAC																																																																		
(Blank)	Unsealed																																																																		
E	IP67																																																																		

* please refer to the forward voltage in electrical specifications



ABOUT THIS SERIES

- Notice:** please note that not all combinations of above numbers are available.
- Gold faston terminal denotes anode (+), silver terminal denotes cathode (-)
 - Standard wire length is 200 mm, 22 AWG UL1007, red wire denotes anode (+), black wire denotes cathode (-) for other wire lengths consult APEM
 - Take care when soldering to the faston terminals (recommended solder temperature 300 °C - 3 sec)
 - Short body pins and wires are only available up to 28 VDC
 - Standard tri-color faston terminals are two anodes (+) and one cathode (-)
 - Tri-color wires are one red (+) and one green (+) anode and one black (-) cathode
 - Tri-color pins are center (-) cathode, shortest (+) anode pin green, longest (+) anode pin red
 - We recommend using hyperbright or superbright leds for use at 110 VAC and 220 VAC
 - For leds with alternative voltages and for multi-voltage options please consult APEM


Q16 series

Ø16 mm panel mount LED indicators


PROMINENT BEZEL




WIRES

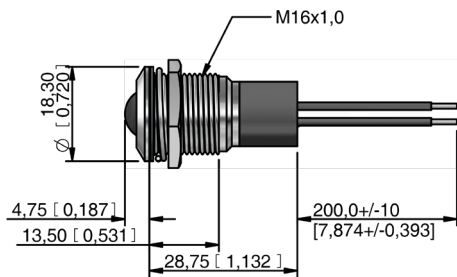


REAR EPOXY WIRES

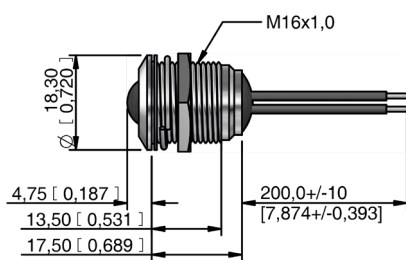


SHORT BODY WIRES

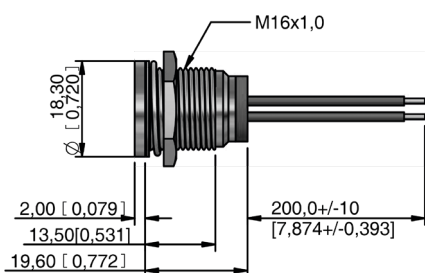


SOLDER LUG/FASTON

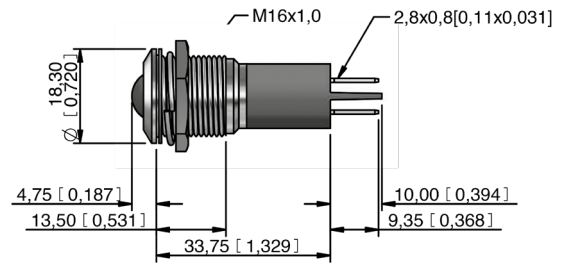


PINS

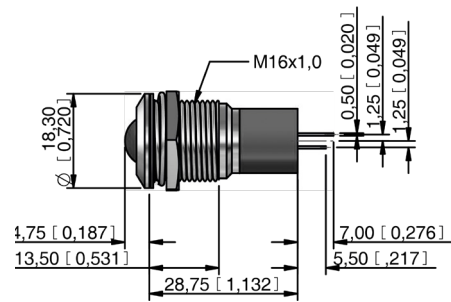

REAR EPOXY PINS

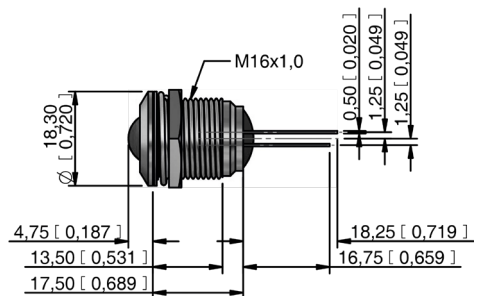


SHORT BODY PINS

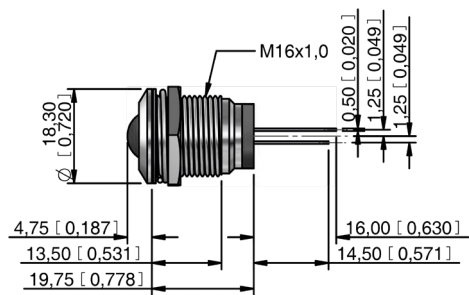


Q16 series

Ø16 mm panel mount LED indicators


FLUSH BEZEL




WIRES

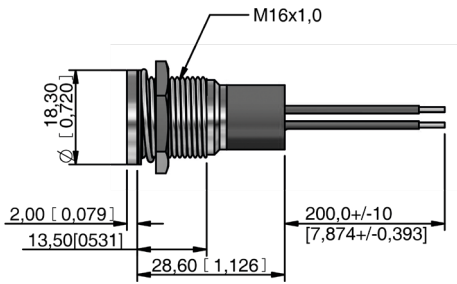


REAR EPOXY WIRES

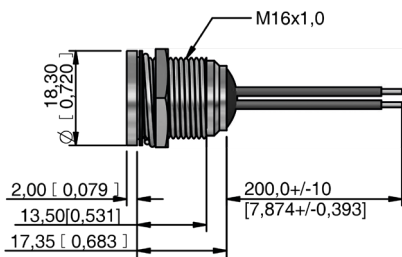


SHORT BODY WIRES

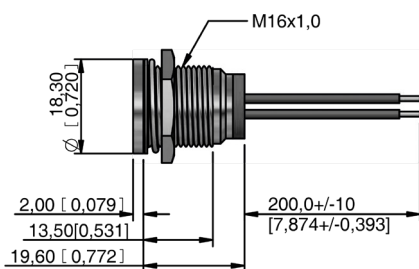


SOLDER LUG/FASTON

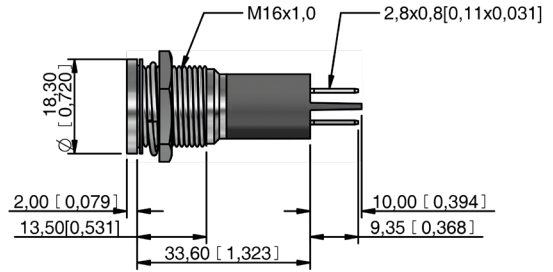


PINS

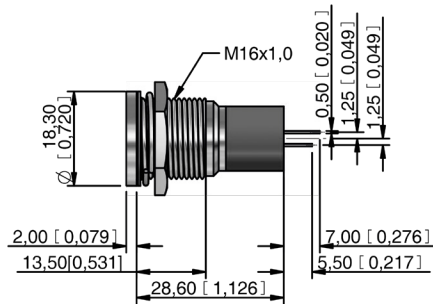

REAR EPOXY PINS

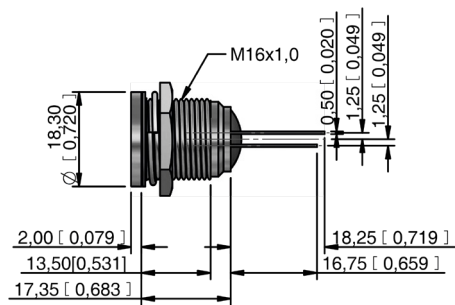

SHORT BODY PINS

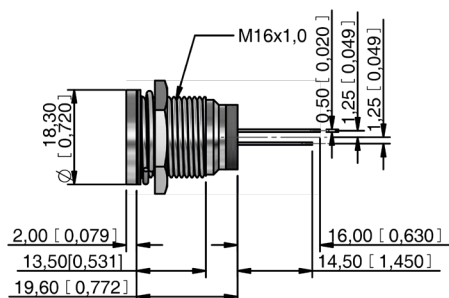


Q16 series

Ø16 mm panel mount LED indicators


RECESSED BEZEL




WIRES

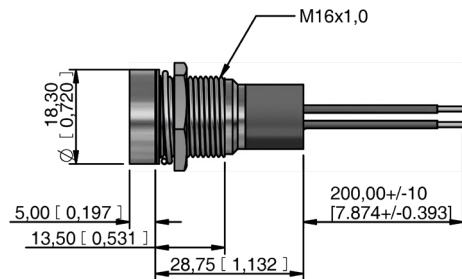


REAR EPOXY WIRES

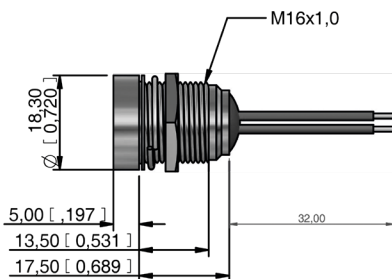


SHORT BODY WIRES

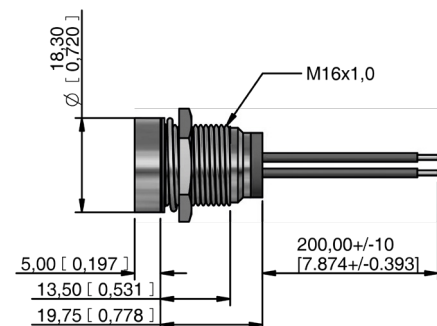


SOLDER LUG/FASTON

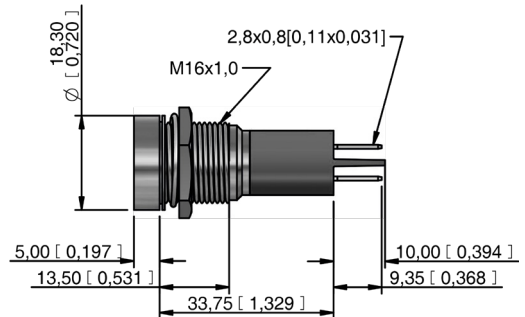


PINS

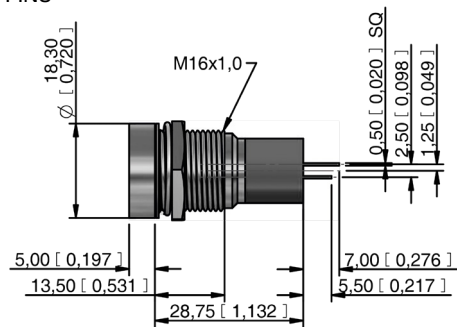

REAR EPOXY PINS

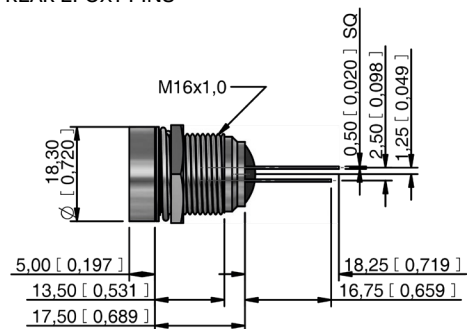



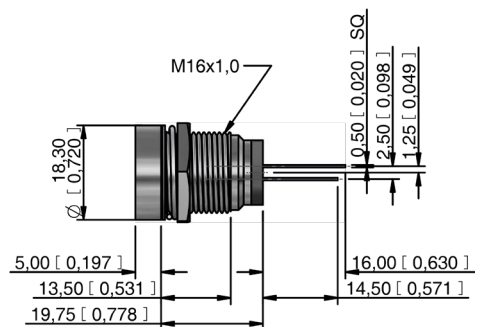


















SHORT BODY PINS



CUSTOM ENGRAVING

Some common codes are listed above, for your custom requirements please contact APEM.
Unless specified standard engraving with white infill will be supplied.
Suffix the part number with legend code :

						
High beam -0AJ	Low beam -097	Rear fog -027	Front fog -026	Windscreen wiper -021	Windscreen washer -022	Ventilator fan -023
						
Turn Signal -0AH	Side lights -098	Horn -041	Hazard warning -013	Heating -018	Brake test -0BU	Arrow -0K6
						
Battery -0AG	Oil can -0GP	Windscreen heating -020	ABS -086	Engine coil -0EL	Seat belt -0SB	USB connection -0BU
						
Steam -0ST	ECU -0EU	Side step -0AD	Air con -012	Engine -040	Boot/Trunk Release -0BR	



Q16 series

Ø16 mm panel mount LED indicators



SECRET UNTIL LIT POLYCARBONATE INSERTS

Some common codes are listed above, for your custom requirements please contact APEM. Please note Secret until lit inserts only available with flush metal bezel (Option F)
Suffix the part number with legend code :



CABLE LENGTH AND CONNECTOR



For custom cable length and connectors contact APEM.