

SAE Flanges



Gear Pump Flanges



## Germany

### **Walter Stauffenberg GmbH & Co. KG**

Im Ehrenfeld 4

58791 Werdohl

Tel.: +49 2392 91 60

Fax: +49 2392 91 61 03

E-Mail: [sales@stauff.com](mailto:sales@stauff.com)

**[www.stauff.com](http://www.stauff.com)**

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

**You can find detailed contact information on the last two pages of this product catalogue or at [www.stauff.com](http://www.stauff.com).**



Please note: Unless otherwise stated, all data and figures in this product catalogue are approximate values and are only valid as references, which are not binding (also in respect to any third parties' rights of protection) and thus do not release the customer / user from checking and testing the suitability of the products for the foreseen purposes. Therefore, data and figures can only be used in a limited sense for construction purposes.

The application of the products is beyond the control possibilities of the manufacturer and, therefore, is exclusively subject to the responsibility of the customer / user.

In the event that a liability is nevertheless considered, any compensation will be limited to the value of the goods supplied by the manufacturer and used by the customer / user. As a matter of course, the manufacturer guarantees the perfect quality of all products in accordance with the General Terms and Conditions of Business and Sale.

Subject to modifications due to the ongoing development and improvement of the products.

With the publication of this product catalogue, previous editions are no longer valid.



Introduction	4 - 11
SAE Split Flange Halves / Flange Clamps	12 - 21
SAE Flange / Counterflange Adaptors	22 - 37
SAE Single-Part Flanges / Counterflanges	38 - 79
Accessories for SAE Flanges	80 - 89
SAE Flange Blocks	90 - 97
Gear Pump Flanges	98 - 111
Assembly Instructions	112 - 117
Appendix (Product-Specific Abbreviations / Global Contact Directory)	118 - 123

A

B

C

D

E

F


G






### Catalogue 1 STAUFF Clamps

- Block Clamps
- Special Clamps
- Light Series Clamps
- Saddle Clamps
- U-Bolt Clamps
- Metal Clamps
- Construction Series

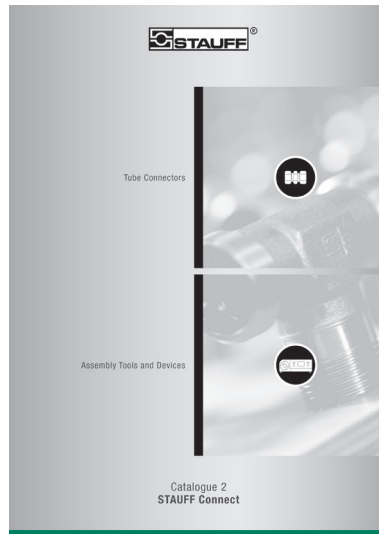

### Catalogue 2 STAUFF Connect

- Tube Connectors
- Assembly Tools and Devices

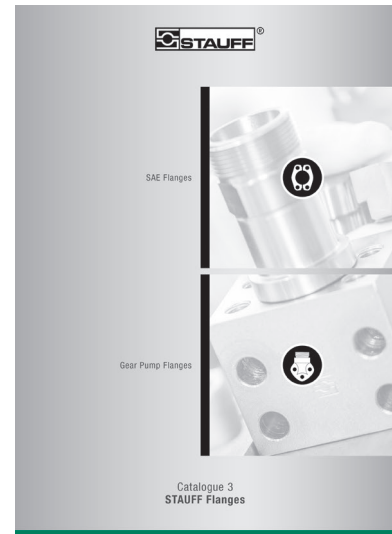


### Catalogue 3 STAUFF Flanges

- SAE Flanges
- Gear Pump Flanges



### Catalogue 4 STAUFF Hose Connectors

- Hose Connectors
- High-Pressure Hose Connectors

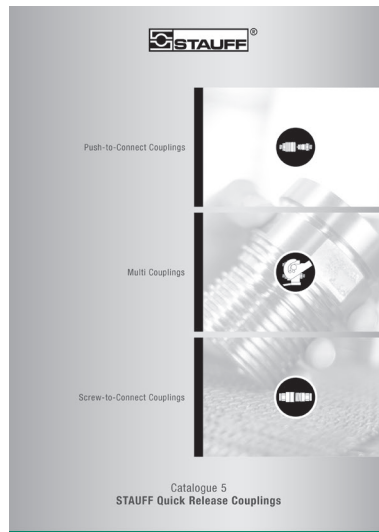

### Catalogue 5 STAUFF Quick Release Couplings

- Push-to-Connect Couplings
- Multi Couplings
- Screw-to-Connect Couplings



### Catalogue 6 STAUFF Valves

- Two-Way Ball Valves
- Multi-Way Ball Valves
- Flow Control and Check Valves
- Gauge Isolator Valves







### Catalogue 7 STAUFF Test

- Test Couplings
- Test Adaptors
- Test Hoses and Connectors




### Catalogue 8 STAUFF Diagtronics

- Pressure Gauges
- Hydraulic Testers
- Oil Analysis Equipment



### Catalogue 9 STAUFF Filtration Technology

- Replacement Filter Elements
- Pressure Filters
- Return-Line Filters
- In-Line Filters
- Spin-On Filters
- Offline and Bypass Filters
- Filtration Systems

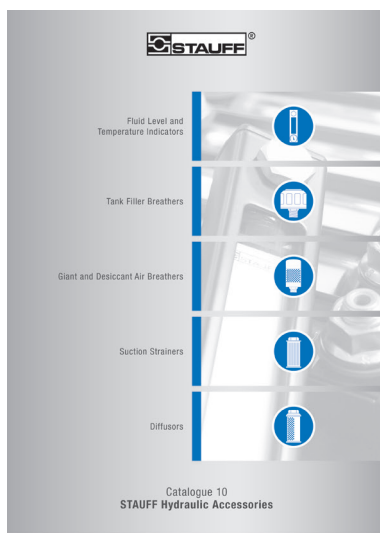

### Catalogue 10 STAUFF Hydraulic Accessories

- Fluid Level and Temperature Indicators
- Tank Filler Breathers
- Giant and Desiccant Air Breathers
- Suction Strainers
- Diffusers



For more than 50 years, the companies of STAUFF Group have been developing, manufacturing and distributing pipework equipment and hydraulic components for mechanical and plant engineering and for service and industrial maintenance.

In addition to mobile and industrial hydraulic machinery, typical applications also include commercial and special purpose vehicles, rail transportation and energy technology. Likewise, STAUFF products are used in marine, oil and gas applications and in the process, food and chemical industries.

The overall range currently includes about 40000 standard products as well as numerous special and system solutions according to customer's specifications or based on our in-house development.

All STAUFF products undergo relevant testing in accordance with international regulations and are governed by the high standards of the in-house quality management system. Furthermore, many items have received certifications and approvals from various international institutes, organisations and authorities who have independently confirmed the quality and performance of the products.


Wholly-owned manufacturing, sales and service facilities in 18 countries and a tight global network of authorised distribution partners ensure high presence and service paired with a maximum of availability.



Lloyd's Register  
LRQA

Quality Management – ISO 9001:2015  
Environmental Management – ISO 14001:2015  
Safety Management OHSAS – 18001:2007

## STAUFF LINE Components

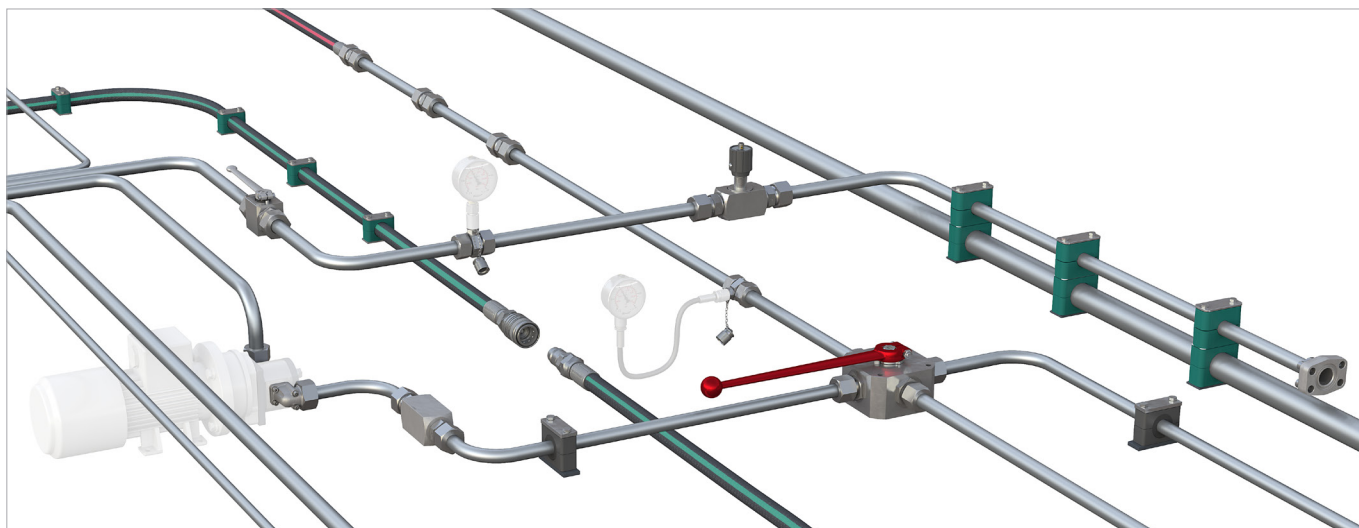

With the seven dedicated **STAUFF Line** product groups

- **STAUFF Clamps**
- **STAUFF Connect**
- **STAUFF Flanges**
- **STAUFF Hose Connectors**
- **STAUFF Quick Release Couplings**
- **STAUFF Valves**
- **STAUFF Test**

from own, in-house development and manufacturing, the companies of the STAUFF Group provide a comprehensive range of components for fastening and connecting pipes, tubes and hoses for mobile and industrial hydraulic applications and many other industries.

The portfolio is completed by components for shutting-off, regulating, throttling and measuring fluid media.


In order to perfectly match each other, STAUFF Line products are designed and offered on a high, uniform level of quality. A large proportion of the range made from steel comes as standard with the premium STAUFF Zinc/Nickel surface coating, which is also optionally available for many of the other components.

This coating offers the most reliable surface protection far beyond the previous market standards – even after transport, handling and assembly of the components – and meets all current legal requirements.

If desired, Original Equipment Manufacturers can be supported with value-added services, from **technical consultation to pre-assembly, assembly and kitting** as well as **logistics services**:

- Support with the **selection of suitable standard components** and ordering options; provision of **customised solutions** according to customer's specifications or based on our in-house development – from prototyping to large scale production
- **Analysis and optimization** of existing and design and developments of new systems aimed at increasing the efficiency and performance of machines and equipment and creating value for customers by reducing the total cost
- **Pre-assembly, assembly and kitting** of individual components to customer-specific system modules
- Individually coordinated **procurement solutions** (e.g. web shop and electronic data interchange) and **supply models** (e.g. from warehousing of customised components to Kanban logistics and just-in-time delivery of pre-fabricated system modules to the assembly lines of the customers) aimed at optimising material flows



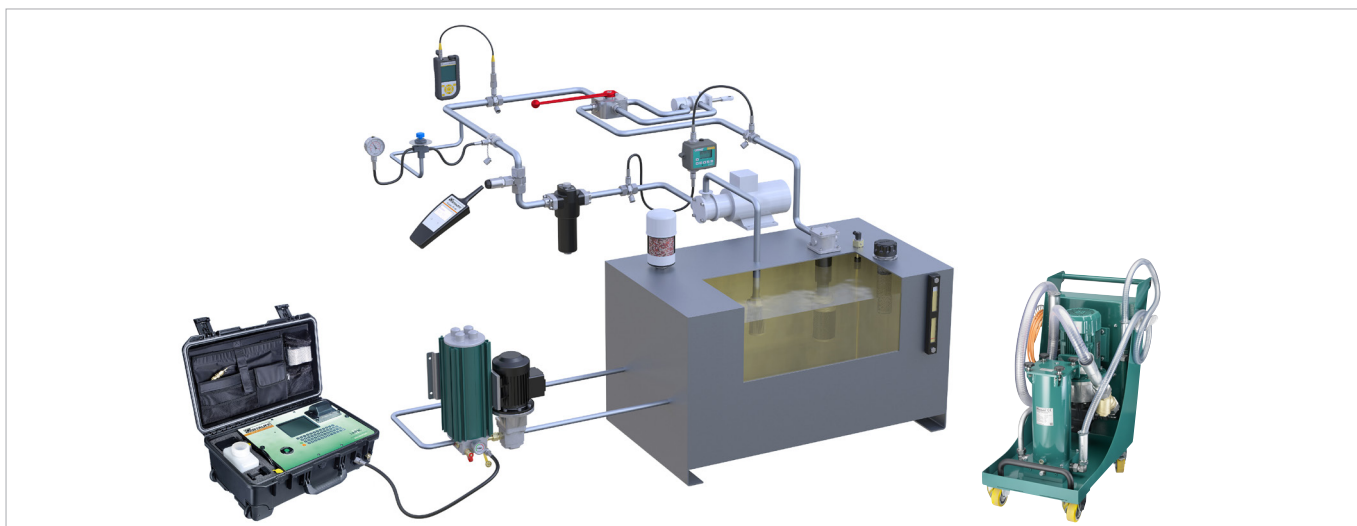

Aligned with the needs of the market, the product groups

- **STAUFF Test**
- **STAUFF Diagtronics**
- **STAUFF Filtration Technology**
- **STAUFF Hydraulic Accessories**

include a comprehensive range of analogue and digital measuring equipment and devices, filtration systems and replacement filter elements as well as accessories for the construction of tanks, reservoirs, power packs and gear boxes in mobile and industrial hydraulics.

The offer is completed by relevant value-added services:

- Support with the **selection of suitable components** and ordering options; provision of **customised solutions** according to customer's specifications or based on our in-house development – from prototyping to large scale production
- Analysis of existing hydraulic circuits aimed at filtration systems, tank components and monitoring devices that perfectly match to the specific requirements, and developing integrated concepts to increase the efficiency and performance of machines and equipment
- Individually coordinated **procurement solutions** and **supply models**





## STAUFF Flanges

The STAUFF Flanges product group is closely aligned with the market requirements and contains an extensive range of single-part and multi-part SAE flange connectors in the standard and high pressure series according to SAE J 518 C and ISO 6162-1/2.

The standard-Pressure Series (3000 PSI) contains flange components with maximum operating pressures between 35 bar and 350 bar or 508 PSI and 5075 PSI and is available for a variety of nominal sizes between DN 13 (1/2") and DN 127 (5").

The 6.000 PSI High-Pressure Series is suitable for maximum operating pressures up to 420 bar or 6090 PSI and covers nominal sizes between DN 13 (1/2") and DN 76 (3"),

STAUFF SAE Flanges are used as a reliable alternative in applications where the use of regular tube fittings is not permitted or technically not possible due to the required operating pressure, the size or the limited mounting space.

Compared to tube fittings, the biggest advantage of SAE Flanges is the considerably higher pressure resistance for most sizes and the continuous pressure level in the High-Pressure Series (6000 PSI).

The STAUFF Flanges product group is completed by various types and designs of gear pump flanges made from carbon steel and aluminium in accordance with German and Italian connection standards.









## www.stauff.com/catalogues

The STAUFF online catalogue centre at [www.stauff.com/catalogues](http://www.stauff.com/catalogues) provides fast and direct access to digital versions of this as well as other STAUFF product catalogues in all available languages.

### Online Page-Flip Catalogues

- Easy navigation through index or the powerful full text search functionality
- Contents can be shared and forwarded by e-mail, printed or downloaded and saved in PDF file format
- Also suitable for mobile devices

### Download Catalogues

- Download entire product catalogues and save them in PDF file format

### Catalogue Request

- Contact form to request printed copies of the product catalogue as well as digital copies on USB stick

The fastest way to the online page-flip catalogue:

The links that can be found at the bottom edge of all pages of this product catalogue will lead you directly to the corresponding page in the online page-flip catalogue.

In doing so, contents can be searched, shared and forwarded by e-mail, printed or downloaded and saved in PDF file format.

Scan the QR code next to the direct link with the camera of your mobile device\* and also use the functions in this way.

\* may require a suitable app




10

Catalogue 3 • Edition 08/2019

[www.stauff.com/3/en/#10](http://www.stauff.com/3/en/#10)



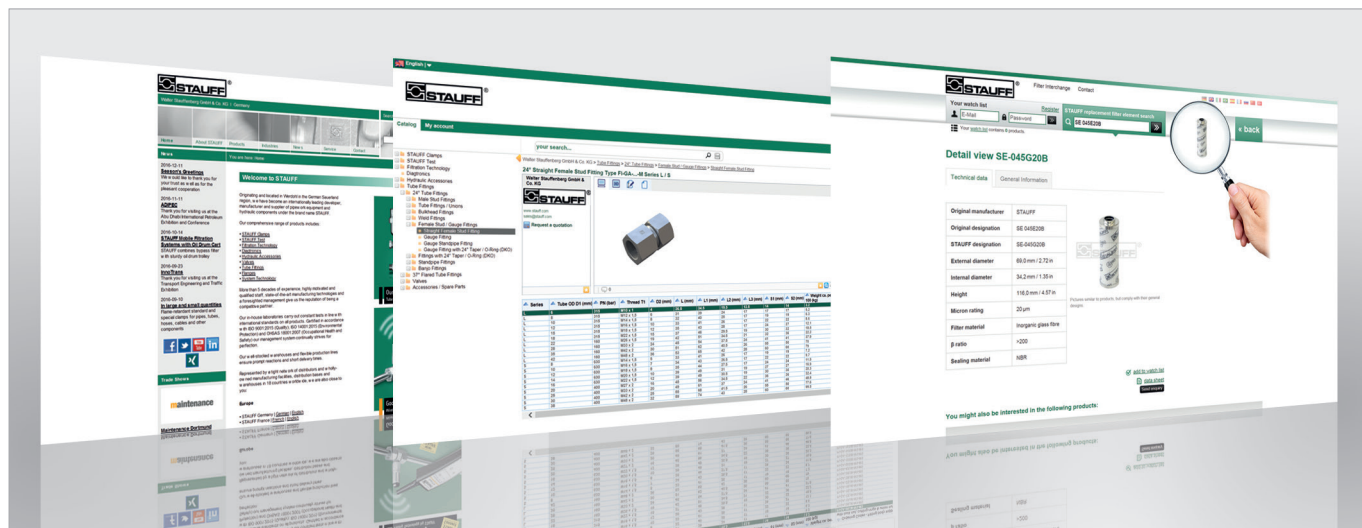

## www.stauff.com

General information about the companies of STAUFF Group, latest business and product news as well as complete global contact details

## www.stauff.com/cad

Immediate access to and free download of 3D models and 2D drawings for a growing number of STAUFF products

## www.filterinterchange.com

Online database for the quick and easy identification and interchange of almost all common brands and types of replacement filter elements

Follow STAUFF and keep yourself updated:



Facebook

www.facebook.com/stauffgroup



Twitter

www.twitter.com/stauffgroup



LinkedIn

www.linkedin.com/company/stauff



Youtube

www.youtube.com/stauffgroup











**SAE Split Flange Halves**

DB

14



**SAE Flange Clamp**

BM

16



**SAE Split Flange Halves (Flat Style)**

DB-FL

18



**SAE Flange Clamp (Flat Style)**

BM-FL

19




**SAE Flange Clamp with Metric Tapped Holes**

BM-G

20



## SAE Split Flange Halves Type DB - 3000 PSI Series

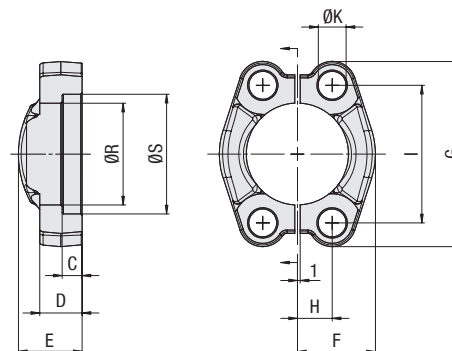

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I	ØK <sup>2</sup>	per 100		Metric	UNC	
13	1/2	350	350	24,3	31	6,2	13	19	22,8	54	8,75	38,1	8,7	13,20		M8x25	5/16-18 UNC x 1-1/4	DB-301-W66
		5075	5075	.96	1.22	.24	.51	.75	.90	2.13	.34	1.50	.34	29.04				
19	3/4	350	350	32,2	38,9	6,2	14	22	25,9	65	11,15	47,6	10,5	17,00		M10x30	3/8-16 UNC x 1-1/4	DB-302-W66
		5075	5075	1.27	1.53	.24	.55	.87	1.02	2.56	.44	1.87	.41	37.40				
25	1	250	315	38,5	45,3	7,5	16	24	29,2	70	13,1	52,4	10,5	22,00		M10x30	3/8-16 UNC x 1-1/4	DB-303-W66
		3625	4568	1.52	1.78	.30	.63	.94	1.15	2.76	.52	2.06	.41	48.40				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	36,3	79,5	15,1	58,7	12	30,00			7/16-14 UNC x 1-1/2	DB-304-U-W66
		2900	3625	1.72	2.03	.30	.55	.87	1.43	3.13	.59	2.31	.41	66.00				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	36,3	79,5	15,1	58,7	12,5	31,20		M12x35		DB-304-M12-W66
		2900	3625	1.72	2.03	.30	.55	.87	1.43	3.13	.59	2.31	.49	68.64				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	36,3	79,5	15,1	58,7	10,5	32,20		M10x30		DB-304-M-W66
		2900	3625	1.72	2.03	.30	.55	.87	1.43	3.13	.59	2.31	.41	70.84				
38	1-1/2	200	200	50,8	61,1	7,5	16	25	41,1	94	17,85	69,9	13,5	47,00		M12x35	1/2-13 UNC x 1-1/2	DB-305-W66
		2900	2900	2.00	2.41	.30	.63	.98	1.62	3.70	.70	2.75	.53	103.40				
38	1-1/2	200	200	50,8	61,1	7,5	16	25	41,1	94	17,85	69,9	15	46,00		M14x35		DB-305-M14-W66
		2900	2900	2.00	2.41	.30	.63	.98	1.62	3.70	.70	2.75	.59	101.20				
51	2	160	200	62,8	72,3	9	16	26	48,2	102	21,45	77,8	13,5	54,20		M12x35	1/2-13 UNC x 1-1/2	DB-306-W66
		2320	2900	2.47	2.85	.35	.63	1.02	1.90	4.02	.84	3.06	.53	119.24				
51	2	160	200	62,8	72,3	9	16	26	48,2	102	21,45	77,8	15	50,00		M14x35		DB-306-M14-W66
		2320	2900	2.47	2.85	.35	.63	1.02	1.90	4.02	.84	3.06	.59	110.00				
64	2-1/2	100	160	74,9	84,9	9	19	38	54,1	114,5	25,4	88,9	13,5	90,30		M12x40	1/2-13 UNC x 1-1/2	DB-307-W66
		1450	2320	2.95	3.34	.35	.75	1.50	2.13	4.51	1.00	3.50	.53	198.66				
64	2-1/2	100	160	74,9	84,9	9	19	38	54,1	114,5	25,4	88,9	15	74,00		M14x40		DB-307-M14-W66
		1450	2320	2.95	3.34	.35	.75	1.50	2.13	4.51	1.00	3.50	.59	162.80				
76	3	100	160	90,9	102,4	9	22	41	65,3	135	30,95	106,4	17	135,60		M16x50	5/8-11 UNC x 2	DB-308-W66
		1450	2320	3.58	4.03	.35	.87	1.61	2.57	5.31	1.22	4.19	.67	298.32				
89	3-1/2	35	35	102,4	115,1	10,7	22	28	69,6	152	34,95	120,7	17	135,00		M16x50	5/8-11 UNC x 2	DB-309-W66
		508	508	4.03	4.53	.42	.87	1.10	2.74	5.98	1.38	4.75	.67	297.00				
102	4	35	35	115	127,8	10,7	25	35	75,9	162	38,9	130,2	17	170,00		M16x50	5/8-11 UNC x 2	DB-310-W66
		508	508	4.53	5.03	.42	.98	1.38	2.99	6.38	1.53	5.13	.67	374.00				
127	5	35	35	140,5	153,2	10,7	28	41	90,4	184	46,5	152,4	17	246,80		M16x55	5/8-11 UNC x 2-1/4	DB-311-W66
		508	508	5.53	6.03	.42	1.10	1.61	3.56	7.24	.00	6.00	.67	542.96				


### Materials / Ordering Options / Examples

- \* Pair of SAE Split Flange Halves made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **DB-...-W66**
- \* Pair of SAE Split Flange Halves made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **DB-...-W3**
- \* Pair of SAE Split Flange Halves made of Stainless Steel V4A – 1.4404 (on request) **DB-...-W5**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **DB-...-M-B-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **DB-...-M-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **DB-...-MH-B-W129-K**
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **DB-...-U-B-W129-K**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.



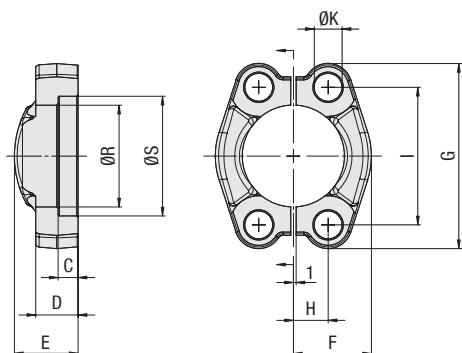

## SAE Split Flange Halves Type DB • 6000 PSI Series



A

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)												Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I	ØK <sup>2</sup>	per 100				Metric	UNC	
13	1/2	350	420	24,6	32,5	7,2	16	22	23,6	56,5	9,10	40,5	8,7	16,70				M8x30	5/16-18 UNC x 1-1/4	DB-601-W66
		5075	6090	.97	1.28	.28	.63	.87	.93	2.22	.36	1.59	.34	36.74						
19	3/4	350	420	32,5	42	8,2	19	28	30	71	11,90	50,8	10,5	33,20				M10x35	3/8-16 UNC x 1-1/2	DB-602-W66
		5075	6090	1.28	1.65	.32	.75	1.10	1.18	2.80	.47	2.00	.41	73.04						
25	1	350	420	38,8	48,4	9	24	33	34,8	81	13,90	57,2	11,9	51,30						
		5075	6090	1.53	1.91	.35	.94	1.30	1.37	3.19	.55	2.25	.47	112.86					7/16-14 UNC x 1-3/4	DB-603-U-W66
25	1	350	420	38,8	48,4	9	24	33	34,8	81	13,90	57,2	13	52,20				M12x45		DB-603-M-W66
		5075	6090	1.53	1.91	.35	.94	1.30	1.37	3.19	.55	2.25	.51	114.84						
32	1-1/4	350	420	44,5	54,8	9,8	27	38	38,6	95	15,90	66,6	13,5	83,70				M12x45	1/2-13 UNC x 1-3/4	DB-604-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	1.52	3.74	.63	2.62	.53	184.14						
32	1-1/4	350	420	44,5	54,8	9,8	27	38	38,6	95	15,90	66,6	15	80,00				M14x45		DB-604-M14-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	1.52	3.74	.63	2.62	.59	176.00						
38	1-1/2	350	420	51,6	64,3	12	30	43	47,5	113	18,25	79,3	17	135,00				M16x55	5/8-11 UNC x 2-1/4	DB-605-W66
		5075	6090	2.03	2.53	.47	1.18	1.69	1.87	4.45	.72	3.12	.67	297.00						
51	2	350	420	67,6	80,2	12	37	52	56,9	133	22,25	96,8	21	210,00				M20x70	3/4-10 UNC x 2-3/4	DB-606-W66
		5075	6090	2.66	3.16	.47	1.46	2.05	2.24	5.24	.88	3.81	.83	462.00						

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.

## Materials / Ordering Options / Examples

- \* Pair of SAE Split Flange Halves made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **DB-...-W66**
- \* Pair of SAE Split Flange Halves made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **DB-...-W3**
- \* Pair of SAE Split Flange Halves made of Stainless Steel V4A – 1.4404 (on request) **DB-...-W5**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **DB-...-M-B-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **DB-...-M-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **DB-...-MH-B-W129-K**
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **DB-...-U-B-W129-K**



## SAE Flange Clamp Type BM ▪ 3000 PSI Series

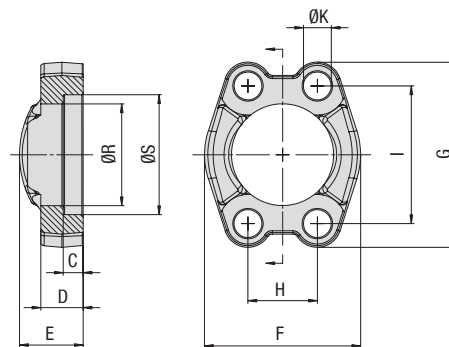

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I	ØK <sup>2</sup>	per 100		Metric	UNC	
13	1/2	350	350	24,3	31	6,2	13	19	46	54	17,5	38,1	8,7	13,7		M8x25	5/16-18 UNC x 1-1/4	BM-301-W66
		5075	5075	.96	1.22	.24	.51	.75	1.81	2.13	.69	1.50	.34	30.14				
19	3/4	350	350	32,2	38,9	6,2	14	22	52	65	22,3	47,6	10,5	20,1		M10x30	3/8-16 UNC x 1-1/4	BM-302-W66
		5075	5075	1.27	1.53	.24	.55	.87	2.05	2.56	.88	1.87	.41	44.22				
25	1	250	315	38,5	45,3	7,5	16	24	59	70	26,2	52,4	10,5	22,9		M10x30	3/8-16 UNC x 1-1/4	BM-303-W66
		3625	4568	1.52	1.78	.30	.63	.94	2.32	2.76	1.03	2.06	.41	50.38				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	73	79,5	30,2	58,7	12	30,0			7/16-14 UNC x 1-1/2	BM-304-U-W66
		2900	3625	1.72	2.03	.30	.55	.87	2.87	3.13	1.19	2.31	.47	66.00				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	73	79,5	30,2	58,7	12,5	32,3		M12x35		BM-304-M12-W66
		2900	3625	1.72	2.03	.30	.55	.87	2.87	3.13	1.19	2.31	.49	71.06				
32	1-1/4	200	250	43,7	51,6	7,5	14	22	73	79,5	30,2	58,7	10,5	32,8		M10x30		BM-304-M-W66
		2900	3625	1.72	2.03	.30	.55	.87	2.87	3.13	1.19	2.31	.41	72.16				
38	1-1/2	200	200	50,8	61,1	7,5	16	25	83	94	35,7	69,9	13,5	48,6		M12x35	1/2-13 UNC x 1-1/2	BM-305-W66
		2900	2900	2.00	2.41	.30	.63	.98	3.27	3.70	1.41	2.75	.53	106.92				
38	1-1/2	200	200	50,8	61,1	7,5	16	25	83	94	35,7	69,9	15	45,0		M14x35		BM-305-M14-W66
		2900	2900	2.00	2.41	.30	.63	.98	3.27	3.70	1.41	2.75	.59	99.00				
51	2	160	200	62,8	72,3	9	16	26	97	102	42,9	77,8	13,5	55,6		M12x35	1/2-13 UNC x 1-1/2	BM-306-W66
		2320	2900	2.47	2.85	.35	.63	1.02	3.82	4.02	1.69	3.06	.53	122.32				
51	2	160	200	62,8	72,3	9	16	26	97	102	42,9	77,8	15	50,0		M14x35		BM-306-M14-W66
		2320	2900	2.47	2.85	.35	.63	1.02	3.82	4.02	1.69	3.06	.59	110.00				
64	2-1/2	100	160	74,9	84,9	9	19	38	109	114,5	50,8	88,9	13,5	89,7		M12x40	1/2-13 UNC x 1-1/2	BM-307-W66
		1450	2320	2.95	3.34	.35	.75	1.50	4.29	4.51	2.00	3.50	.53	197.34				
64	2-1/2	100	160	74,9	84,9	9	19	38	109	114,5	50,8	88,9	15	74,0		M14x40		BM-307-M14-W66
		1450	2320	2.95	3.34	.35	.75	1.50	4.29	4.51	2.00	3.50	.59	162.80				
76	3	100	160	90,9	102,4	9	22	41	131	135	61,9	106,4	17	135,9		M16x50	5/8-11 UNC x 2	BM-308-W66
		1450	2320	3.58	4.03	.35	.87	1.61	5.16	5.31	2.44	4.19	.67	298.99				
89	3-1/2	35	35	102,4	115,1	10,7	22	28	140	152	69,9	120,7	17	134,1		M16x50	5/8-11 UNC x 2	BM-309-W66
		508	508	4.03	4.53	.42	.87	1.10	5.51	5.98	2.75	4.75	.67	295.02				
102	4	35	35	115	127,8	10,7	25	35	152	162	77,8	130,2	17	166,0		M16x50	5/8-11 UNC x 2	BM-310-W66
		508	508	4.53	5.03	.42	.98	1.38	5.98	6.38	3.06	5.13	.67	365.20				
127	5	35	35	140,5	153,2	10,7	28	41	181	184	92,1	152,4	17	253,8		M16x55	5/8-11 UNC x 2-1/4	BM-311-W66
		508	508	5.53	6.03	.42	1.10	1.61	7.13	7.24	3.63	6.00	.67	558.36				

### Materials / Ordering Options / Examples

- \* Flange Clamp made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated
- \* Flange Clamp made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request)
- \* Flange Clamp made of Stainless Steel V4A – 1.4404 (on request)

BM-...-W66  
BM-...-W3  
BM-...-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

BM-...-M-B-W66-K  
BM-...-M-V-W66-K


- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BM-...-MH-B-W129-K  
BM-...-U-B-W129-K

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.



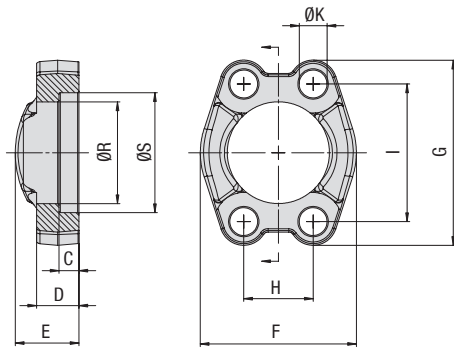

## SAE Flange Clamp Type BM • 6000 PSI Series



A

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I	ØK <sup>2</sup>	per 100		Metric	UNC	
13	1/2	350	420	24,6	32,5	7,2	16	22	48	56,5	18,2	40,5	8,7	17,3		M8x30	5/16-18 UNC x 1-1/4	BM-601-W66
		5075	6090	.97	1.28	.28	.63	.87	1.89	2.22	.72	1.59	.34	38.06				
19	3/4	350	420	32,5	42	8,2	19	28	60	71	23,8	50,8	10,5	35,0		M10x35	3/8-16 UNC x 1-1/2	BM-602-W66
		5075	6090	1.28	1.65	.32	.75	1.10	2.36	2.80	.94	2.00	.41	77.00				
25	1	350	420	38,8	48,4	9	24	33	70	81	27,8	57,2	12	57,8			7/16-14 UNC x 1-3/4	BM-603-U-W66
		5075	6090	1.53	1.91	.35	.94	1.30	2.76	3.19	1.09	2.25	.47	127.16				
25	1	350	420	38,8	48,4	9	24	33	70	81	27,8	57,2	13	55,7		M12x45		BM-603-M-W66
		5075	6090	1.53	1.91	.35	.94	1.30	2.76	3.19	1.09	2.25	.51	122.54				
32	1-1/4	350	420	44,5	54,8	9,8	27	38	78	95	31,8	66,6	13,5	85,0		M12x45	1/2-13 UNC x 1-3/4	BM-604-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	3.07	3.74	1.25	2.62	.53	187.00				
32	1-1/4	350	420	44,5	54,8	9,8	27	38	78	95	31,8	66,6	15	80,8		M14x45		BM-604-M14-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	3.07	3.74	1.25	2.62	.59	177.76				
38	1-1/2	350	420	51,6	64,3	12	30	43	95	113	36,5	79,3	17	139,5		M16x55	5/8-11 UNC x 2-1/4	BM-605-W66
		5075	6090	2.03	2.53	.47	1.18	1.69	3.74	4.45	1.44	3.12	.67	306.90				
51	2	350	420	67,6	80,2	12	37	52	114	133	44,5	96,8	21	211,0		M20x70	3/4-10 UNC x 2-3/4	BM-606-W66
		5075	6090	2.66	3.16	.47	1.46	2.05	4.49	5.24	1.75	3.81	.83	464.20				

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.


### Materials / Ordering Options / Examples

- \* Flange Clamp made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BM-...-W66**
- \* Flange Clamp made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BM-...-W3**
- \* Flange Clamp made of Stainless Steel V4A – 1.4404 (on request) **BM-...-W5**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **BM-...-M-B-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **BM-...-M-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **BM-...-MH-B-W129-K**
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **BM-...-U-B-W129-K**



## SAE Split Flange Halves (Flat Style)

### Type DB-FL ▪ 3000 / 6000 PSI Series

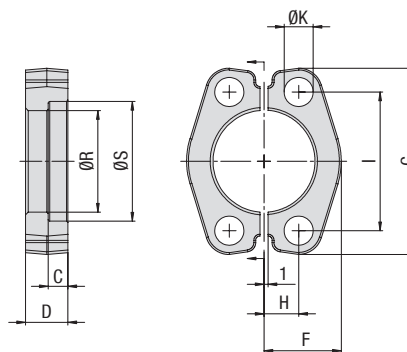

#### 3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	F	G	H	I	ØK <sup>2</sup>	per 100	Metric	UNC	
13	1/2	350	350	24,3	31	6,2	13	22,8	54	8,75	38,1	8,7	10,6	M8x25	5/16-18 UNC x 1-1/4	DB-FL-301-W66
		5075	5075	.96	1.22	.24	.51	.90	2.13	.34	1.50	.34	23.32			
19	3/4	350	350	32,2	38,9	6,2	14	25,9	65	11,15	47,6	10,5	15,1	M10x30	3/8-16 UNC x 1-1/4	DB-FL-302-W66
		5075	5075	1.27	1.53	.24	.55	1.02	2.56	.44	1.87	.41	33.13			
25	1	250	315	38,5	45,3	7,5	16	29,2	70	13,1	52,4	10,5	19,0	M10x30	3/8-16 UNC x 1-1/4	DB-FL-303-W66
		3625	3625	1.52	1.78	.30	.63	1.15	2.76	.52	2.06	.41	41.80			
32	1-1/4	200	250	43,7	51,6	7,5	14	36,6	79	15,1	58,7	10,5	25,4	M10x35		DB-FL-304-M-W66
		2900	2900	1.72	2.03	.30	.55	1.44	3.11	.59	2.31	.41	55.88			
38	1-1/2	200	200	50,8	61,6	7,5	16	41,1	94	17,85	69,9	13,5	40,3	M12x35	1/2-13 UNC x 1-1/2	DB-FL-305-W66
		2900	2900	2.00	2.43	.30	.63	1.62	3.70	.70	2.75	.53	88.66			
51	2	160	200	62,8	72,3	9	16	48,2	102	21,45	77,8	13,5	45,4	M12x35	1/2-13 UNC x 1-1/2	DB-FL-306-W66
		2320	2320	2.47	2.85	.35	.63	1.90	4.02	.84	3.06	.53	99.81			
64	2-1/2	100	160	74,9	84,9	9	19	53	115	25,4	88,9	13,5	63,4	M12x40	1/2-13 UNC x 1-1/2	DB-FL-307-W66
		1450	1450	2.95	3.34	.35	.75	2.09	4.53	1.00	3.50	.53	139.48			
76	3	100	160	90,9	102,4	9	22	64,3	135	30,95	106,4	17	103,6	M16x50	5/8-11 UNC x 2	DB-FL-308-W66
		1450	1450	3.58	4.03	.35	.87	2.53	5.31	1.22	4.19	.67	227.92			

#### 6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	F	G	H	I	ØK <sup>2</sup>	per 100	Metric	UNC	
13	1/2	350	420	24,6	32,5	7,2	16	23,6	56	9,1	40,5	8,7	15,1	M8x30	5/16-18 UNC x 1-1/4	DB-FL-601-W66
		5075	6090	.97	1.28	.28	.63	.93	2.20	.36	1.59	.34	33.18			
19	3/4	350	420	32,5	42	8,2	20	30,0	71	11,9	50,8	10,5	30,8	M10x35	3/8-16 UNC x 1-1/2	DB-FL-602-W66
		5075	6090	1.28	1.65	.32	.79	1.18	2.80	.47	2.00	.41	67.76			
25	1	350	420	38,8	48,4	9	25	34,8	81	13,9	57,2	13	52,2	M12x45		DB-FL-603-M-W66
		5075	6090	1.53	1.91	.35	.98	1.37	3.19	.55	2.25	.51	114.84			
32	1-1/4	350	420	44,5	54,8	9,8	27	38,6	95	15,9	66,6	15	69,5	M14x45		DB-FL-604-M14-W66
		5075	6090	1.75	2.16	.39	1.06	1.52	3.74	.63	2.62	.59	152.90			
38	1-1/2	350	420	51,6	64,3	12	30	47,5	113	18,25	79,3	17	116,8	M16x55	5/8-11 UNC x 2-1/4	DB-FL-605-W66
		5075	6090	2.03	2.53	.47	1.18	1.87	4.45	.72	3.12	.67	256.96			
51	2	350	420	67,6	80,2	12	37	56,9	133	22,25	96,8	21	184,7	M20x70	3/4-10 UNC x 2-3/4	DB-FL-606-W66
		5075	6090	2.66	3.16	.47	1.46	2.24	5.24	.88	3.81	.83	406.34			
64	2-1/2	350	420	89,5	108,5	20	48	75	166	29,35	123,8	25	281,4	M24x80		DB-FL-607-M-W66 <sup>3</sup>
		5075	6090	3.52	4.27	.79	1.89	2.95	6.54	1.16	4.87	.98	619.08			
76	3	350	420	114,5	132,5	25	58	89	210	35,7	152,4	32	462,1	M30x90		DB-FL-608-M-W66 <sup>3</sup>
		5075	6090	4.51	5.22	.98	2.28	3.50	8.27	1.41	6.00	1.26	1016.62			

### Materials / Ordering Options / Examples

\* Pair of SAE Split Flange Halves (Flat Style) made of Steel C55 or equivalent, zinc-plated and thick-film-passivated

**DB-FL-...-W66**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

**DB-FL-...-M-B-W66-K**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

**DB-FL-...-M-V-W66-K**

\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

**DB-FL-...-MH-B-W129-K**

\* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


**DB-FL-...-U-B-W129-K**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.

<sup>3</sup> Made of steel C45 or equivalent, zinc-plated and thick-film-passivated.



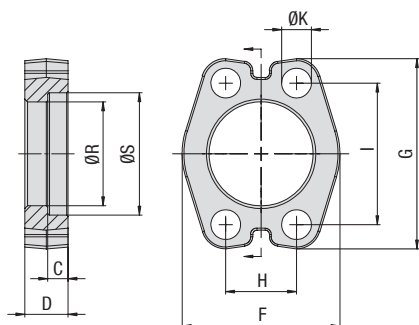

## SAE Flange Clamp (Flat Style) Type BM-FL - 3000 / 6000 PSI Series



A

### 3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	F	G	H	I	ØK <sup>2</sup>	per 100	Metric	UNC			
13	1/2	350	350	24,3	31	6,2	13	45,6	54	17,5	38,1	8,7	11,4	M8x25	5/16–18 UNC x 1-1/4	BM-FL-301-W66		
		5075	5075	.96	1.22	.24	.51	1.80	2.13	.69	1.50	.34	25.08					
19	3/4	350	350	32,2	38,9	6,2	14	51,8	65	22,3	47,6	10,5	15,0	M10x30	3/8–16 UNC x 1-1/4	BM-FL-302-W66		
		5075	5075	1.27	1.53	.24	.55	2.04	2.56	.88	1.87	.41	33.00					
25	1	250	315	38,5	45,3	7,5	16	58,4	70	26,2	52,4	10,5	19,2	M10x30	3/8–16 UNC x 1-1/4	BM-FL-303-W66		
		3625	4568	1.52	1.78	.30	.63	2.30	2.76	1.03	2.06	.41	42.24					
32	1-1/4	200	250	43,7	51,6	7,5	14	73,2	79	30,2	58,7	10,5	25,7	M10x35		BM-FL-304-M-W66		
		2900	3625	1.72	2.03	.30	.55	2.88	3.11	1.19	2.31	.41	56.54					
38	1-1/2	200	200	50,8	61,1	7,5	16	82,2	94	35,7	69,9	13,5	39,1	M12x35	1/2–13 UNC x 1-1/2	BM-FL-305-W66		
		2900	2900	2.00	2.41	.30	.63	3.24	3.70	1.41	2.75	.53	86.02					
51	2	160	200	62,8	72,3	9	16	96,4	102	42,9	77,8	13,5	47,3	M12x35	1/2–13 UNC x 1-1/2	BM-FL-306-W66		
		2320	2900	2.47	2.85	.35	.63	3.80	4.02	1.69	3.06	.53	104.06					
64	2-1/2	100	160	74,9	84,9	9	19	106	115	50,8	88,9	13,5	63,6	M12x40	1/2–13 UNC x 1-1/2	BM-FL-307-W66		
		1450	2320	2.95	3.34	.35	.75	4.17	4.53	2.00	3.50	.53	139.92					
76	3	100	160	90,9	102,4	9	22	128,6	135	61,9	106,4	17	104,9	M16x50	5/8–11 UNC x 2	BM-FL-308-W66		
		1450	2320	3.58	4.03	.35	.87	5.06	5.31	2.44	4.19	.67	230.78					

### 6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> /in)										Weight ( <sup>kg</sup> /lbs) ca.	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØR	ØS	C	D	F	G	H	I	ØK <sup>2</sup>	per 100	Metric	UNC		
13	1/2	350	420	24,6	32,5	7,2	16	47,2	56	18,2	40,5	8,7	15,0	M8x30	5/16–18 UNC x 1-1/4	BM-FL-601-W66	
		5075	6090	.97	1.28	.28	.63	1.86	2.20	.72	1.59	.34	33.00				
19	3/4	350	420	32,5	42	8	20	60	71	23,8	50,8	10,5	30,1	M10x35	3/8–16 UNC x 1-1/2	BM-FL-602-W66	
		5075	6090	1.28	1.65	.31	.79	2.36	2.80	.94	2.00	.41	66.22				
25	1	350	420	38,8	48,4	9	25	69,6	81	27,8	57,2	13	49,0	M12x45		BM-FL-603-M-W66	
		5075	6090	1.53	1.91	.35	.98	2.74	3.19	1.09	2.25	.51	107.80				
32	1-1/4	350	420	44,5	54,8	9,8	27	77,2	95	31,8	66,6	15	71,5	M14x45		BM-FL-604-M14-W66	
		5075	6090	1.75	2.16	.39	1.06	3.04	3.74	1.25	2.62	.59	157.30				
38	1-1/2	350	420	51,6	64,3	12	30	89,4	113	36,5	79,3	17	118,9	M16x55	5/8–11 UNC x 2-1/4	BM-FL-605-W66	
		5075	6090	2.03	2.53	.47	1.18	3.52	4.45	1.44	3.12	.67	261.58				
51	2	350	420	67,6	80,2	12	37	113,4	133	44,5	96,8	21	187,4	M20x70	3/4–10 UNC x 2-3/4	BM-FL-606-W66	
		5075	6090	2.66	3.16	.47	1.46	4.46	5.24	1.75	3.81	.83	412.28				
64	2-1/2	350	420	89,5	108,5	20	48	150	166	58,7	123,8	25	187,4	M24x80		BM-FL-607-M-W66 <sup>3</sup>	
		5075	6090	3.52	4.27	.79	1.89	5.91	6.54	2.31	4.87	.98	412.28				
76	3	350	420	114,5	132,5	25	58	178	210	71,4	152,4	32	392,0	M30x90		BM-FL-608-M-W66 <sup>3</sup>	
		5075	6090	4.51	5.22	.98	2.28	7.01	8.27	2.81	6.00	1.26	862.40				

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Dimensions of screw holes in part different to the ISO to match both Metric and UNC bolts.

<sup>3</sup> Made of steel C45 or equivalent, zinc-plated and thick-film-passivated.

## Materials / Ordering Options / Examples

★ Flange Clamp (Flat Style) made of Steel C55 or equivalent, zinc-plated and thick-film-passivated

BM-FL-...-W66

★ Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

BM-FL-...-M-B-W66-K

★ Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

BM-FL-...-M-V-W66-K

★ Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

BM-FL-...-MH-B-W129-K


★ Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BM-FL-...-U-B-W129-K





## SAE Flange Clamp with Metric Tapped Holes Type BM-G ▪ 3000 / 6000 PSI Series

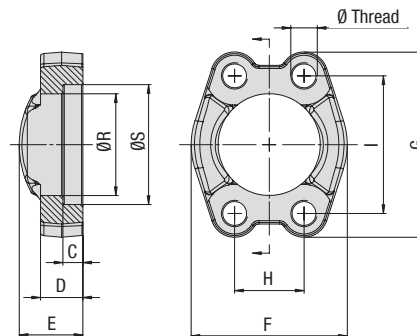

### 3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) ca. per 100	Ø Thread <sup>2</sup>	Ordering Codes
DN	(in)		8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I		
13	1/2	350	350	24,3	31	6,2	13	19	46	54	17,5	38,1	13,9	M8	BM-G-301-W66
		5075	5075	.96	1.22	.24	.51	.75	1.81	2.13	.69	1.50	30.58		
19	3/4	350	350	32,2	38,9	6,2	14	22	52	65	22,3	47,6	19,0	M10	BM-G-302-W66
		5075	5075	1.27	1.53	.24	.55	.87	2.05	2.56	.88	1.87	41.80		
25	1	250	315	38,5	45,3	7,5	16	24	59	70	26,2	52,4	24,4	M10	BM-G-303-W66
		3625	4568	1.52	1.78	.30	.63	.94	2.32	2.76	1.03	2.06	53.68		
32	1-1/4	200	250	43,7	51,6	7,5	14	22	73	79,5	30,2	58,7	32,1	M10 (M12)	BM-G-304-W66
		2900	3625	1.72	2.03	.30	.55	.87	2.87	3.13	1.19	2.31	70.62		
38	1-1/2	200	200	50,8	61,1	7,5	16	25	83	94	35,7	69,9	49,0	M12 (M14)	BM-G-305-W66
		2900	2900	2.00	2.41	.30	.63	.98	3.27	3.70	1.41	2.75	107.80		
51	2	160	200	62,8	72,3	9	16	26	97	102	42,9	77,8	55,5	M12 (M14)	BM-G-306-W66
		2320	2900	2.47	2.85	.35	.63	1.02	3.82	4.02	1.69	3.06	122.10		
64	2-1/2	100	160	74,9	84,9	9	19	38	109	114,5	50,8	88,9	94,9	M12 (M14)	BM-G-307-W66
		1450	2320	2.95	3.34	.35	.75	1.50	4.29	4.51	2.00	3.50	208.78		
76	3	100	160	90,9	102,4	9	22	41	131	135	61,9	106,4	138,1	M16	BM-G-308-W66
		1450	2320	3.58	4.03	.35	.87	1.61	5.16	5.31	2.44	4.19	303.82		
89	3-1/2	35	35	102,4	115,1	10,7	22	28	140	152	69,9	120,7	132,5	M16	BM-G-309-W66
		508	508	4.03	4.53	.42	.87	1.10	5.51	5.98	2.75	4.75	291.50		
102	4	35	35	115	127,8	10,7	25	35	152	162	77,8	130,2	174,8	M16	BM-G-310-W66
		508	508	4.53	5.03	.42	.98	1.38	5.98	6.38	3.06	5.13	384.56		
127	5	35	35	140,5	153,2	10,7	28	41	181	184	92,1	152,4	256,0	M16	BM-G-311-W66
		508	508	5.53	6.03	.42	1.10	1.61	7.13	7.24	3.63	6.00	563.20		

### 6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) ca. per 100	Ø Thread	Ordering Codes
DN	(in)		8.8	10.9 (MH)	ØR	ØS	C	D	E	F	G	H	I		
13	1/2	350	420	24,6	32,5	7,2	16	22	48	56,5	18,2	40,5	18,3	M8	BM-G-601-W66
		5075	6090	.97	1.28	.28	.63	.87	1.89	2.22	.72	1.59	40.26		
19	3/4	350	420	32,5	42	8,2	19	28	60	71	23,8	50,8	34,0	M10	BM-G-602-W66
		5075	6090	1.28	1.65	.32	.75	1.10	2.36	2.80	.94	2.00	74.80		
25	1	350	420	38,8	48,4	9	24	33	70	81	27,8	57,2	57,4	M12	BM-G-603-W66
		5075	6090	1.53	1.91	.35	.94	1.30	2.76	3.19	1.09	2.25	126.28		
32	1-1/4	350	420	44,5	54,8	9,8	27	38	78	95	31,8	66,6	82,9	M12	BM-G-604-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	3.07	3.74	1.25	2.62	182.38		
32	1-1/4	350	420	44,5	54,8	9,8	27	38	78	95	31,8	66,6	85,4	M14	BM-G-604-M14-W66
		5075	6090	1.75	2.16	.39	1.06	1.50	3.07	3.74	1.25	2.62	187.88		
38	1-1/2	350	420	51,6	64,3	12	30	43	95	113	36,5	79,3	143,4	M16	BM-G-605-W66
		5075	6090	2.03	2.53	.47	1.18	1.69	3.74	4.45	1.44	3.12	315.48		
51	2	350	420	67,6	80,2	12	37	52	114	133	44,5	96,8	218,8	M20	BM-G-606-W66
		5075	6090	2.66	3.16	.47	1.46	2.05	4.49	5.24	1.75	3.81	481.36		
64	2-1/2	350	420	108,5	89,5	48	48	20	150	58,7	175	123,8	403,8	M24	BM-G-607-W66
		5075	6090	7.5	6.2	3.3	3.3	1.4	10.3	4.0	12.1	8.5	888.36		
76	3	350	420	132,5	114,5	58	58	25	178	71,4	210	152,4	704,2	M30	BM-G-608-W66
		5075	6090	9.1	7.9	4.0	4.0	1.7	12.3	4.9	14.5	10.5	1549.24		

### Materials / Ordering Options / Examples


- \* Flange Clamp with Metric tapped holes made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BM-G-...-W66**
- \* Flange Clamp with Metric tapped holes made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BM-G-...-W3**
- \* Flange Clamp with Metric tapped holes made of Stainless Steel V4A – 1.4404 (on request) **BM-G-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BM-G-...-M14-W66**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Alternative options shown in brackets are available on request.





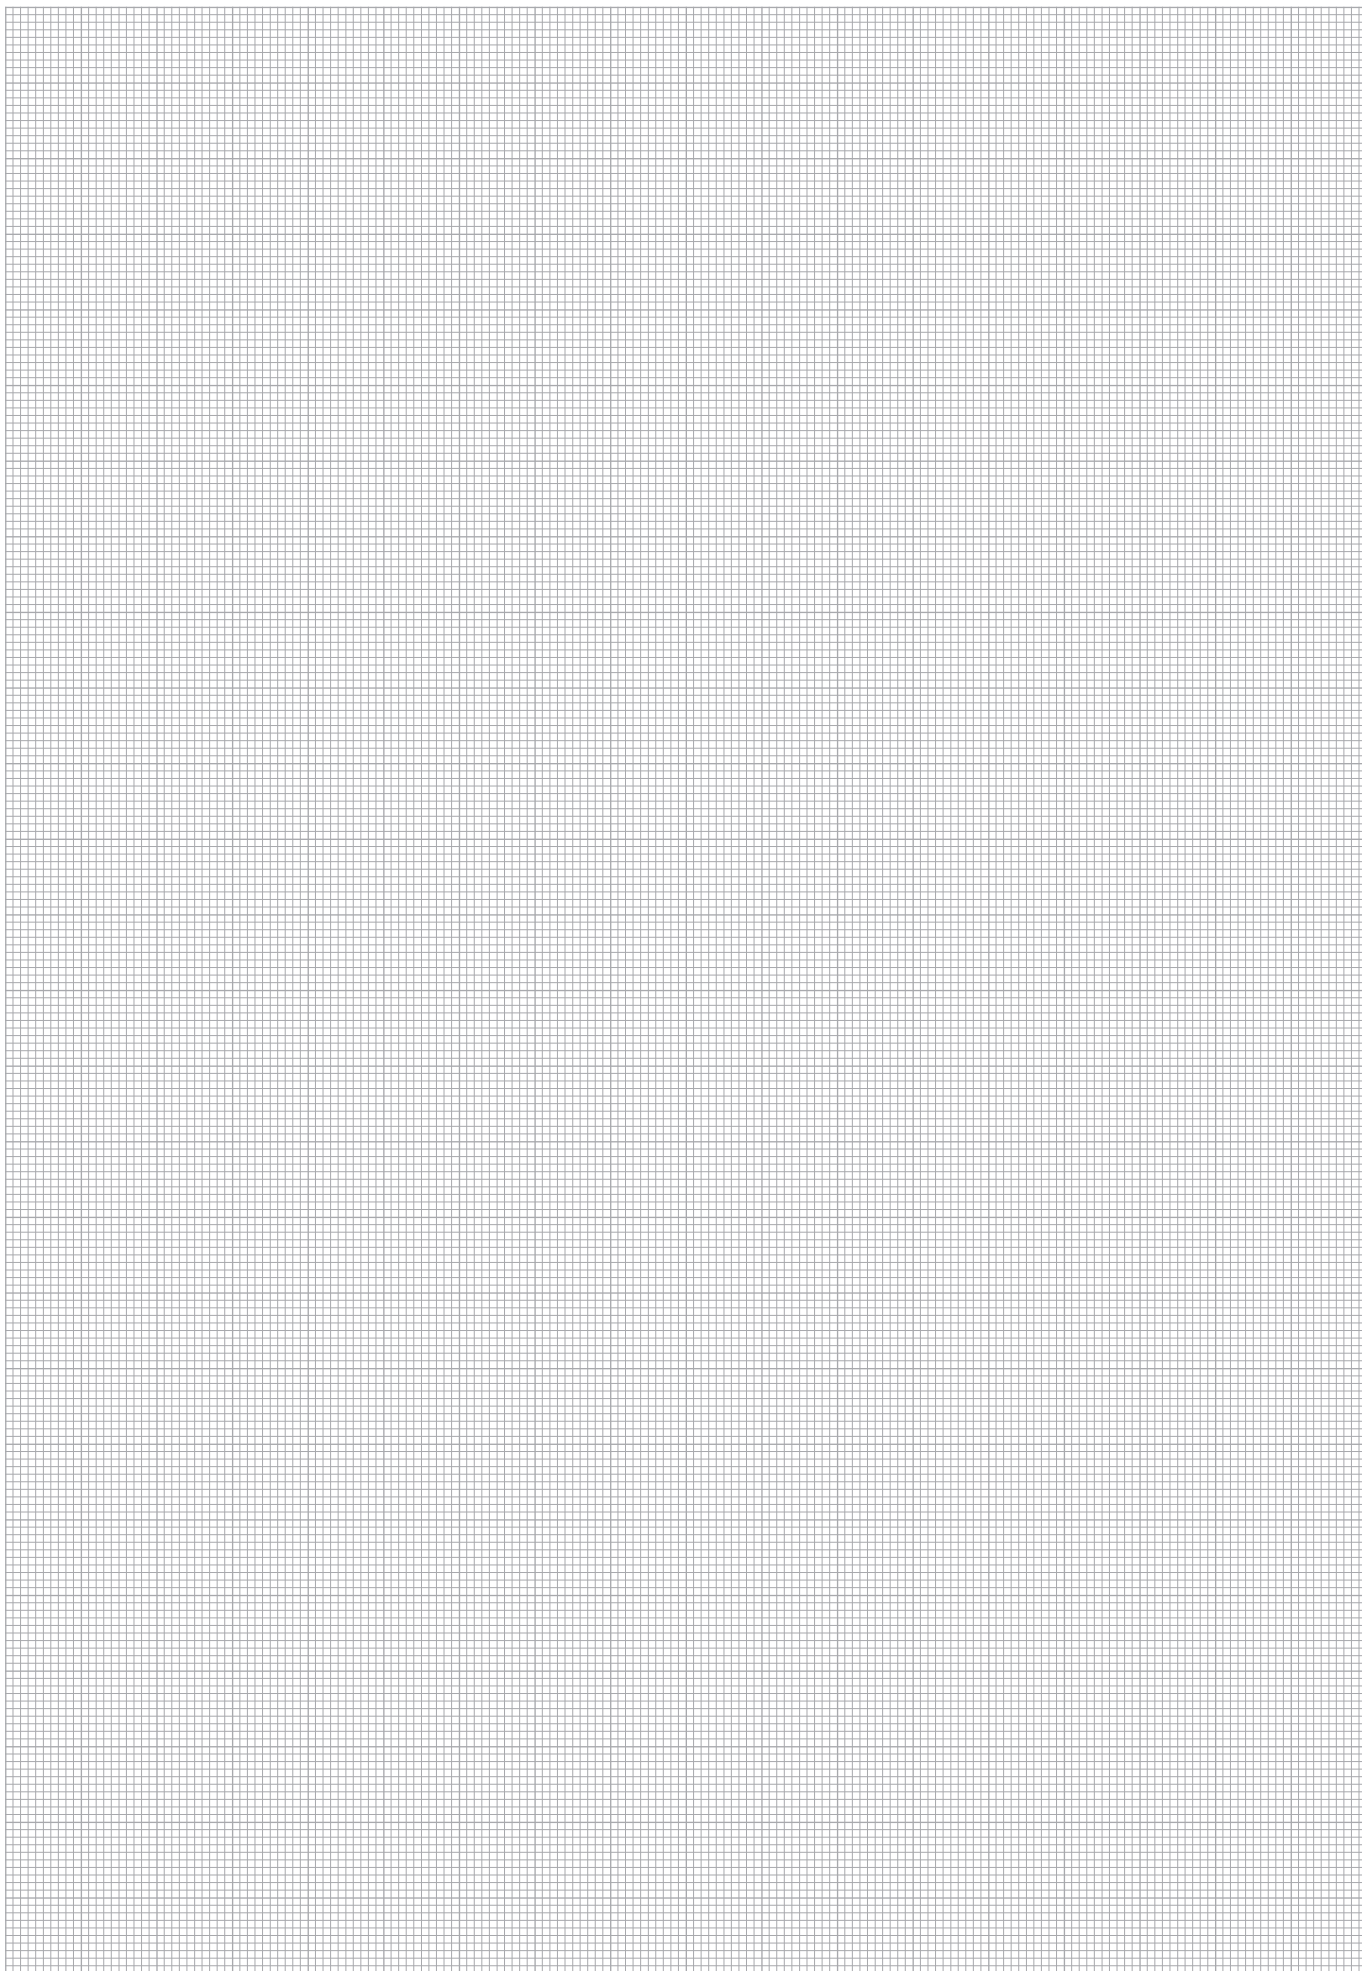





**SAE Butt-Weld Flange Adaptor**

CAG-ST

24



**SAE Butt-Weld Counterflange Adaptor**

CSG-ST

24



**SAE Socket-Weld Flange Adaptor**

CAG-ES

26



**SAE Socket-Weld Counterflange Adaptor**

CSG-ES

26



**SAE Flange Adaptor with Male BSPT Thread**

CAG-T

28



**SAE Counterflange Adaptor with Male BSPT Thread**

CSG-T

28



**SAE Flange Adaptor with Male NPT Thread**

CAG-N

30



**SAE Counterflange Adaptor with Male NPT Thread**

CSG-N

30



**SAE Flange Adaptor with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)**

CAG-L/S

32



**SAE 90° Butt-Weld Flange Adaptor**

CAG90-ST

34



**SAE 90° Flange Adaptor with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)**


CAG90-L/S

36

B



## SAE Butt-Weld Flange / Counterflange Adaptor Type CAG/CSG-ST • 3000 PSI Series

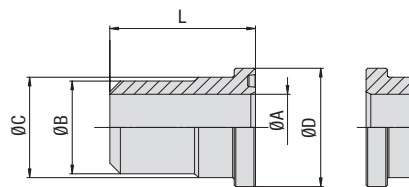

CAG

CSG

### 3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> /in)			Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØC	ØD	L	
13	1/2	350 5075	350 5075	24 .94	30,2 1.19	41 1.61	CAG-301-ST- ** /**-W1
*** replace with ØB / ØA: 16/12 • 20/15 • 21,3/15,7 • 21,3/13,7 • 21,3/12							
19	3/4	350 5075	350 5075	31,5 1.24	38,1 1.50	50 1.97	CAG-302-ST-** /** -W1
**/** replace with ØB / ØA: 25/19 • 26,9/19,7 • 28/19							
25	1	250 3625	315 4568	38 1.50	44,45 1.75	50 1.97	CAG-303-ST- ** /** -W1
*** replace with ØB / ØA: 25/19 • 28/22 • 30/24 • 30/22 • 33,7/24,7 • 38/30 • 38/28							
32	1-1/4	200 2900	250 3625	43 1.69	50,8 2.00	55 2.17	CAG-304-ST- ** /**-W1
*** replace with ØB / ØA: 25/19 • 30/24 • 38/32 • 38/30 • 38/28 • 42,4/33,4 • 42,4/29,8 • 43/31							
38	1-1/2	200 2900	200 2900	50 1.97	60,35 2.38	57 2.24	CAG-305-ST- ** /**-W1
*** replace with ØB / ØA: 38/30 • 42/36 • 42/35 • 42/32 • 45/43 • 48,3/41 • 48,3/38,3 • 48,3/34 • 48,3/35 • 50/38							
51	2	160 2320	200 2900	62 2.44	71,4 2.81	57 2.24	CAG-306-ST-** /**-W1
*** replace with ØB / ØA: 48,3/38,4 • 55/45 • 60,3/54,5 • 60,3/52 • 60,3/50,3 • 60,3/47,7 • 60,3/44,3							
64	2-1/2	100 1450	160 2320	74 2.91	84,1 3.31	58 2.28	CAG-307-ST- ** /**-W1
*** replace with ØB / ØA: 65/53 • 70/55 • 74/65 • 74/61,8 • 74/58							
76	3	100 1450	160 2320	90 3.54	101,6 4.00	60 2.36	CAG-308-ST- ** /**-W1
*** replace with ØB / ØA: 80/68 • 89/82,5 • 89/81 • 89/76 • 89/74 • 89/70							
89	3-1/2	35 508	35 508	102 4.02	114,3 4.50	80 3.15	CAG-309-ST- ** /**-W1
**/** replace with ØB / ØA: 100/88 • 89/81,7 • 89/73							
102	4	35 508	35 508	114 4.49	127 5.00	80 3.15	CAG-310-ST- ** /**-W1
*** replace with ØB / ØA: 110/98 • 114/107 • 114/102 • 114/96,7							
127	5	35 508	35 508	140 5.51	152,4 6.00	80 3.15	CAG-311-ST-** /**-W1
*** replace with ØB / ØA: 133/120 • 139,7/131,7 • 139,7/119,7							

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

CAG-...-ST-\*\*-W1

CSG-...-ST-\*\*-W1

CAG-...-ST-\*\*-W5

- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with BM including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

CAG-...-ST-\*\*-W57-K

CAG-...-ST-\*\*-V-W57-K

CAG-...-ST-\*\*-MH-W129-K

CAG-...-ST-\*\*-U-W129-K


CAG-...-ST-\*\*-BM-W57-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.



## SAE Butt-Weld Flange / Counterflange Adaptor Type CAG/CSG-ST • 6000 PSI Series

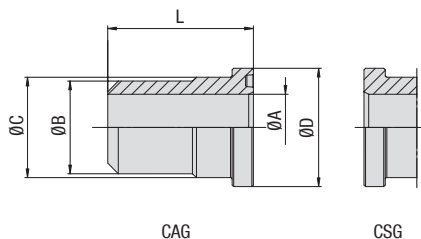

B

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)			Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØC	ØD	L	
13	1/2	350 5075	420 6090	24 .94	31,8 1.25	34 1.34	CAG-601-ST-**-W1
**/** replace with ØB / ØA: 16/12 • 20/15 • 21,3/12,3							
19	3/4	350 5075	420 6090	32 1.26	41,3 1.63	38 1.50	CAG-602-ST-**-W1
**/** replace with ØB / ØA: 16/12 • 20/14 • 25/19 • 25/18 • 25/17 • 26,9/15,7 • 28/18							
25	1	350 5075	420 6090	38 1.50	47,6 1.87	40 1.57	CAG-603-ST-**-W1
**/** replace with ØB / ØA: 25/19 • 30/24 • 30/22 • 33,7/21 • 33,7/19,5 • 38/30 • 38/28							
32	1-1/4	350 5075	420 6090	44 1.73	54 2.13	45 1.77	CAG-604-ST-**-W1 <sup>2</sup>
**/** replace with ØB / ØA: 25/19 • 30/24 • 38/30 • 38/28 • 38/27 • 42,4/29,8							
38	1-1/2	350 5075	420 6090	51 2.01	63,5 2.50	50 1.97	CAG-605-ST-**-W1
**/** replace with ØB / ØA: 38/28 • 45/32 • 48,3/38,3 • 48,3/35,7 • 48,3/34 • 48,3/32,3 • 48,3/30,7 • 50/38 • 51/35							
51	2	350 5075	420 6090	67 2.64	79,4 3.13	58 2.28	CAG-606-ST-**-W1
**/** replace with ØB / ØA: 48,3/35,7 • 60,3/47,7 • 60,3/44,3 • 60,3/42,8 • 60,3/40,3 • 60,3/33,5 • 65/39							
64	2-1/2	350 5075	420 6090	89 3.50	108 4.25	75 2.95	CAG-607-ST-**-W1
**/** replace with ØB / ØA: 76,1/60 • 76,1/56 • 89/69 • 89/67 • 89/60,5							
76	3	350 5075	420 6090	114 4.49	131,6 5.18	80 3.15	CAG-608-ST-**-W1
**/** replace with ØB / ØA: 89/69 • 89/66,7 • 89/60,5 • 114/92,3 • 114/79,3							

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG-604-ST-\*\*-M14#K).

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

CAG-...-ST-\*\*-W1  
CSG-...-ST-\*\*-W1  
CAG-...-ST-\*\*-W5

- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with BM including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

CAG-...-ST-\*\*-W57-K  
CAG-...-ST-\*\*-V-W57-K  
CAG-...-ST-\*\*-MH-W129-K  
CAG-...-ST-\*\*-U-W129-K  
CAG-...-ST-\*\*-BM-W57-K


Please always indicate ØB / ØA.






## SAE Socket-Weld Flange / Counterflange Adaptor Type CAG/CSG-ES - 3000 PSI Series

B

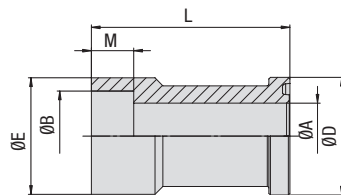

Version A (CAG) - not for use with SAE Flange Clamps BM

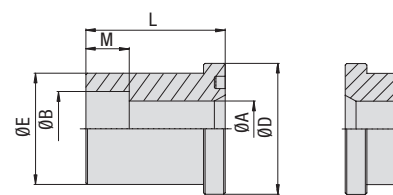

Version B (CAG / CSG)

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Version	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	ØD	ØE	M	L			
13	1/2	350	350	12	16,5	30,2	24	12	35	B	11,0	CAG-301-ES-16.5/12-W1
		5075	5075	.47	.65	1.19	.94	.47	1.38		24.20	
13	1/2	350	350	12	17,6	30,2	24	12	35	B	99,0	CAG-301-ES-17.6/12-W1
		5075	5075	.47	.69	1.19	.94	.47	1.38		217.80	
13	1/2	350	350	15	20,5	30,2	30	13	60	A	15,7	CAG-301-ES-20.5/15-W1
		5075	5075	.59	.81	1.19	1.18	.51	2.36		34.54	
13	1/2	350	350	15	21,7	30,2	30	13	60	A	15,8	CAG-301-ES-21.7/15-W1
		5075	5075	.59	.85	1.19	1.18	.51	2.36		34.76	
19	3/4	350	350	13	20,5	38,1	31,5	12	40	B	18,4	CAG-302-ES-20.5/13-W1
		5075	5075	.51	.81	1.50	1.24	.47	1.57		40.49	
19	3/4	350	350	13	21,7	38,1	31,5	13	40	B	18,4	CAG-302-ES-21.7/13-W1
		5075	5075	.51	.85	1.50	1.24	.51	1.57		40.49	
19	3/4	350	350	19	25,5	38,1	35	13	68	A	28,2	CAG-302-ES-25.5/19-W1
		5075	5075	.75	1.00	1.50	1.38	.51	2.68		62.04	
19	3/4	350	350	19	27,3	38,1	35	13	68	A	27,1	CAG-302-ES-27.3/19-W1
		5075	5075	.75	1.07	1.50	1.38	.51	2.68		59.62	
25	1	250	315	19	27,3	44,45	38	14	45	B	40,0	CAG-303-ES-27.3/19-W1
		3625	4568	.75	1.07	1.75	1.50	.55	1.77		88.00	
25	1	250	315	23	30,5	44,45	44	16	75	A	46,1	CAG-303-ES-30.5/23-W1
		3625	4568	.91	1.20	1.75	1.73	.63	2.95		101.42	
25	1	250	315	25	34	44,45	44	16	75	A	46,0	CAG-303-ES-34/25-W1
		3625	4568	.98	1.34	1.75	1.73	.63	2.95		101.20	
32	1-1/4	200	250	25	30,5	50,8	43	16	50	B	36,0	CAG-304-ES-30.5/25-W1
		2900	3625	.98	1.20	2.00	1.69	.63	1.97		79.20	
32	1-1/4	200	250	25	34	50,8	43	16	50	B	32,0	CAG-304-ES-34/25-W1
		2900	3625	.98	1.34	2.00	1.69	.63	1.97		70.40	
32	1-1/4	200	250	32	38,5	50,8	55	18	95	A	64,0	CAG-304-ES-38.5/32-W1
		2900	3625	1.26	1.52	2.00	2.17	.71	3.74		140.80	
32	1-1/4	200	250	32	43	50,8	55	18	95	A	60,0	CAG-304-ES-43/32-W1
		2900	3625	1.26	1.69	2.00	2.17	.71	3.74		132.00	
38	1-1/2	200	200	32	38,5	60,3	50	18	55	B	44,0	CAG-305-ES-38.5/32-W1
		2900	2900	1.26	1.52	2.37	1.97	.71	2.17		96.80	
38	1-1/2	200	200	32	43	60,3	50	18	55	B	46,0	CAG-305-ES-43/32-W1
		2900	2900	1.26	1.69	2.37	1.97	.71	2.17		101.20	
38	1-1/2	200	200	38	49	60,3	63	20	100	A	82,5	CAG-305-ES-49/38-W1
		2900	2900	1.50	1.93	2.37	2.48	.79	3.94		181.50	
38	1-1/2	200	200	38	50,4	60,3	63	20	100	A	80,9	CAG-305-ES-50.4/38-W1
		2900	2900	1.50	1.98	2.37	2.48	.79	3.94		177.98	
51	2	160	200	38	49	71,4	61,8	20	65	B	174,0	CAG-306-ES-49/38-W1
		2320	2900	1.50	1.93	2.81	2.43	.79	2.56		382.80	
51	2	160	200	38	50,7	71,4	61,8	20	65	B	174,0	CAG-306-ES-50.7/38-W1
		2320	2900	1.50	2.00	2.81	2.43	.79	2.56		382.80	
51	2	160	200	50	61	71,4	79	22	107	A	119,7	CAG-306-ES-61/50-W1
		2320	2900	1.97	2.40	2.81	3.11	.87	4.21		263.34	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

CAG-...-ES-\*\*-\*\*/W1  
CSG-...-ES-\*\*-\*\*/W1  
CAG-...-ES-\*\*-\*\*/W5



- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

CAG-...-ES-\*\*-\*\*/W57-K  
CAG-...-ES-\*\*-\*\*/V-W57-K  
CAG-...-ES-\*\*-\*\*/MH-W129-K  
CAG-...-ES-\*\*-\*\*/U-W129-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

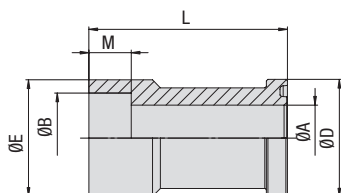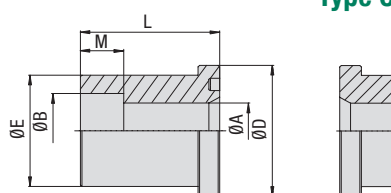

**SAE Socket-Weld Flange / Counterflange Adaptor  
Type CAG/CSG-ES - 3000 / 6000 PSI Series**

**Version A (CAG)** - not for use with SAE Flange Clamps BM

**Version B (CAG / CSG)**

**B**
**3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)**

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Version	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	ØD	ØE	M	L			
64	2-1/2	100	160	47	61	84,1	73,8	22	75	B	79,0	CAG-307-ES-61/47-W1
		1450	2320	1.85	2.40	3.31	2.91	.87	2.95		173.80	
64	2-1/2	100	160	58	77	84,1	98	24	130	A	215,9	CAG-307-ES-77/58-W1
		1450	2320	2.28	3.03	3.31	3.86	.94	5.12		474.98	
76	3	100	160	58	77	101,6	90	24	85	B	108,0	CAG-308-ES-77/58-W1
		1450	2320	2.28	3.03	4.00	3.54	.94	3.35		237.60	
76	3	100	160	70	90,5	101,6	116	28	150	A	372,0	CAG-308-ES-90.5/70-W1
		1450	2320	2.76	3.56	4.00	4.57	1.10	5.91		818.40	

**6000 PSI High Pressure Series (according to ISO 6162-2:2002)**

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Version	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	ØD	ØE	M	L			
13	1/2	350	420	11	16,5	31,8	24	13	35	B	12,5	CAG-601-ES-16.5/11-W1
		5075	6090	.43	.65	1.25	.94	.51	1.38		27.48	
13	1/2	350	420	11	17,6	31,8	24	13	35	B	12,5	CAG-601-ES-17.6/11-W1
		5075	6090	.43	.69	1.25	.94	.51	1.38		27.48	
13	1/2	350	420	15	20,5	31,8	32	13	60	A	19,7	CAG-601-ES-20.5/15-W1
		5075	6090	.59	.81	1.25	1.26	.51	2.36		43.34	
13	1/2	350	420	15	21,7	31,8	32	13	60	A	18,8	CAG-601-ES-21.7/15-W1
		5075	6090	.59	.85	1.25	1.26	.51	2.36		41.36	
19	3/4	350	420	13	20,5	41,3	31,8	13	40	B	19,0	CAG-602-ES-20.5/13-W1
		5075	6090	.51	.81	16.26	1.25	.51	1.57		41.80	
19	3/4	350	420	13	21,7	41,3	31,8	13	40	B	20,1	CAG-602-ES-20.5/15-W1
		5075	6090	.51	.85	16.26	1.25	.51	1.57		44.22	
19	3/4	350	420	19	25,7	41,3	40	13	68	A	36,1	CAG-602-ES-25.5/19-W1
		5075	6090	.75	1.01	1.63	1.57	.51	2.68		79.42	
19	3/4	350	420	19	27,3	41,3	40	13	68	A	35,4	CAG-602-ES-27.3/19-W1
		5075	6090	.75	1.07	1.63	1.57	.51	2.68		77.88	
25	1	350	420	17,5	27,3	47,6	38	13	45	B	35,9	CAG-603-ES-27.3/17.5-W1
		5075	6090	.69	1.07	1.87	1.50	.51	1.77		79.04	
25	1	350	420	25	34	47,6	48	16	75	A	48,0	CAG-603-ES-34/25-W1
		5075	6090	.98	1.34	1.87	1.89	.63	2.95		105.60	
32	1-1/4	350	420	22	34	54	44	16	50	B	52,4	CAG-604-ES-34/22-W1 <sup>2</sup>
		5075	6090	.87	1.34	2.13	1.73	.63	1.97		115.28	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used. Since typically bolts M14 are used, the description of the complete part must show M14 (e.g. CAG-604-ES-34/22-M14-W57-K).

**Materials / Ordering Options / Examples**

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


CAG-...-ES-\*/\*\*/\*\*\*-W1  
CSG-...-ES-\*/\*\*/\*\*\*-W1  
CAG-...-ES-\*/\*\*/\*\*\*-W5

CAG-...-ES-\*/\*\*/\*\*\*-W57-K  
CAG-...-ES-\*/\*\*/\*\*\*-V-W57-K  
CAG-...-ES-\*/\*\*/\*\*\*-MH-W129-K  
CAG-...-ES-\*/\*\*/\*\*\*-U-W129-K

Please always indicate ØB / ØA.



## SAE Flange / Counterflange Adaptor with Male BSPT Thread Type CAG/CSG-T • 3000 PSI Series

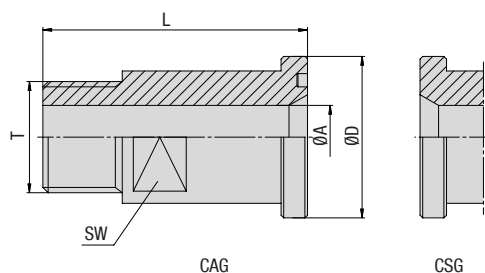

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		L	SW	T (BSPT)	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØD					
13	1/2	300	300	12	30,2	50	19	1/2	13,0	CAG-301-T-W66
		4350	4350	.47	1.19	1.97	.75		28.60	
13	1/2	300	300	10	30,2	50	19	3/8 (06)	13,0	CAG-301-T06-W66
		4350	4350	.39	1.19	1.97	.75		28.60	
19	3/4	300	300	17	38,1	55	27	3/4	18,2	CAG-302-T-W66
		4350	4350	.67	1.50	2.17	1.06		40.04	
19	3/4	300	300	12	38,1	55	27	1/2 (08)	18,2	CAG-302-T08-W66
		4350	4350	.47	1.50	2.17	1.06		40.04	
25	1	300	300	22	44,45	60	32	1	40,0	CAG-303-T-W66
		4350	4350	.87	1.75	2.36	1.26		88.00	
25	1	300	300	17	44,45	60	32	3/4 (12)	40,0	CAG-303-T12-W66
		4350	4350	.67	1.75	2.36	1.26		88.00	
32	1-1/4	150	150	27	50,8	65	41	1-1/4	43,7	CAG-304-T-W66
		2175	2175	1.06	2.00	2.56	1.61		96.14	
32	1-1/4	150	150	22	50,8	65	41	1 (16)	44,0	CAG-304-T16-W66
		2175	2175	.87	2.00	2.56	1.61		96.80	
38	1-1/2	150	150	32	60,3	70	46	1-1/2	61,5	CAG-305-T-W66
		2175	2175	1.26	2.37	2.76	1.81		135.30	
38	1-1/2	150	150	27	60,3	70	46	1-1/4 (20)	61,5	CAG-305-T20-W66
		2175	2175	1.06	2.37	2.76	1.81		135.30	
51	2	150	150	40	71,4	75	55	2	100,7	CAG-306-T-W66
		2175	2175	1.57	2.81	2.95	2.17		221.54	
51	2	150	150	30	71,4	75	55	1-1/2 (24)	45,0	CAG-306-T24-W66
		2175	2175	1.18	2.81	2.95	2.17		99.00	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples


- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CAG-...-T-W66**
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CSG-...-T-W66**
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **CAG-...-T-W5**
- \* Size of connection thread deviating from the standard (e.g. 1/2 BSPT) **CAG-...-T08-W66**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG-...-T-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-U-W130-K**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.





## SAE Flange / Counterflange Adaptor with Male BSPT Thread Type CAG/CSG-BSPT • 6000 PSI Series

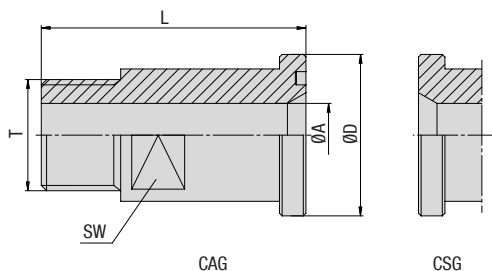

B

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØD	L	SW	T (BSPT)			
13	1/2	350	350	12	31,8	50	19	1/2		12,5	CAG-601-T-W66
		5075	5075	.47	1.25	1.97	.75			27.48	
13	1/2	350	350	10	31,8	50	19	3/8 (06)		12,5	CAG-601-T06-W66
		5075	5075	.39	1.25	1.97	.75			27.48	
19	3/4	350	350	17	41,3	60	26	3/4		23,4	CAG-602-T-W66
		5075	5075	.67	1.63	2.36	1.02			51.51	
19	3/4	350	350	12	41,3	60	26	1/2 (08)		23,4	CAG-602-T08-W66
		5075	5075	.47	1.63	2.36	1.02			51.51	
25	1	350	350	22	47,6	70	32	1		35,9	CAG-603-T-W66
		5075	5075	.87	1.87	2.76	1.26			79.04	
25	1	350	350	17	47,6	70	32	3/4 (12)		35,9	CAG-603-T12-W66
		5075	5075	.67	1.87	2.76	1.26			79.04	
32	1-1/4	250	250	27	54	75	36	1-1/4		52,4	CAG-604-T-W66 <sup>2</sup>
		3625	3625	1.06	2.13	2.95	1.42			115.28	
32	1-1/4	250	250	22	54	75	36	1 (16)		52,4	CAG-604-T16-W66
		3625	3625	.87	2.13	2.95	1.42			115.28	
38	1-1/2	250	250	30	63,5	80	41	1-1/2		76,0	CAG-605-T-W66
		3625	3625	1.18	2.50	3.15	1.61			167.20	
38	1-1/2	250	250	27	63,5	80	41	1-1/4 (20)		76,0	CAG-605-T20-W66
		3625	3625	1.06	2.50	3.15	1.61			167.20	
51	2	200	200	40	79,4	90	55	2		141,8	CAG-606-T-W66
		2900	2900	1.57	3.13	3.54	2.17			311.96	
51	2	200	200	30	79,4	90	55	1-1/2 (24)		141,8	CAG-606-T24-W66
		2900	2900	1.18	3.13	3.54	2.17			311.96	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG-604-T-\*\*-M14#K).

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CAG-...-T-W66**
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CSG-...-T-W66**
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **CAG-...-T-W5**
- \* Size of connection thread deviating from the standard (e.g. 1/2 BSPT) **CAG-...-T08-W66**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG-...-T-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG-...-T-U-W130-K**



## SAE Flange / Counterflange Adaptor with Male NPT Thread Type CAG/CSG-N ▪ 3000 PSI Series

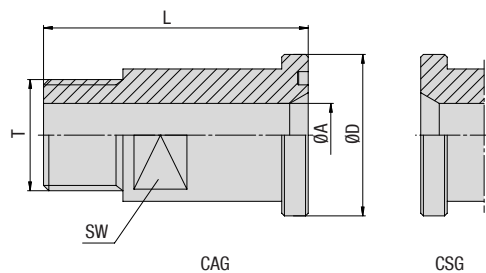

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		L	SW	T (NPT)	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØD					
13	1/2	300	300	12	30,2	50	19	1/2	13,0	CAG-301-N-W66
		4350	4350	.47	1.19	1.97	.75		28.60	
13	1/2	300	300	10	30,2	50	19	3/8 (06)	13,0	CAG-301-N06-W66
		4350	4350	.39	1.19	1.97	.75		28.60	
19	3/4	300	300	17	38,1	55	27	3/4	23,0	CAG-302-N-W66
		4350	4350	.67	1.50	2.17	1.06		50.60	
19	3/4	300	300	12	38,1	55	27	1/2 (08)	23,0	CAG-302-N08-W66
		4350	4350	.47	1.50	2.17	1.06		50.60	
25	1	300	300	22	44,45	60	32	1	28,0	CAG-303-N-W66
		4350	4350	.87	1.75	2.36	1.26		61.60	
25	1	300	300	17	44,45	60	32	3/4 (12)	28,0	CAG-303-N12-W66
		4350	4350	.67	1.75	2.36	1.26		61.60	
32	1-1/4	150	150	27	50,8	65	41	1-1/4	79,0	CAG-304-N-W66
		2175	2175	1.06	2.00	2.56	1.61		173.80	
32	1-1/4	150	150	22	50,8	65	41	1 (16)	79,0	CAG-304-N16-W66
		2175	2175	.87	2.00	2.56	1.61		173.80	
38	1-1/2	150	150	32	60,3	70	46	1-1/2	62,0	CAG-305-N-W66
		2175	2175	1.26	2.37	2.76	1.81		136.40	
38	1-1/2	150	150	27	60,3	70	46	1-1/4 (20)	62,0	CAG-305-N20-W66
		2175	2175	1.06	2.37	2.76	1.81		136.40	
51	2	150	150	40	71,4	75	55	2	95,8	CAG-306-N-W66
		2175	2175	1.57	2.81	2.95	2.17		210.76	
51	2	150	150	30	71,4	75	55	1-1/2 (24)	171,6	CAG-306-N24-W66
		2175	2175	1.18	2.81	2.95	2.17		377.52	

Please see Page 89 for separate Bolt Sets and Sealings.


### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CAG-...-N-W66**
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CSG-...-N-W66**
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **CAG-...-N-W5**
- \* Size of connection thread deviating from the standard (e.g. 1/2 NPT) **CAG-...-N08-W66**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-N-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG-...-N-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-N-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG-...-N-U-W130-K**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.



## SAE Flange Adaptor / Counterflange with Male NPT Thread Type CAG/CSG-NPT • 6000 PSI Series

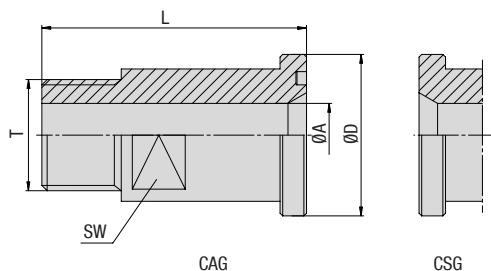

B

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		Weight (kg/lbs) ca. per 100		Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØD	L	SW	T (NPT)	
13	1/2	350	350	12	31,8	50	19	1/2	CAG-601-N-W66
		5075	5075	.47	1.25	1.97	.75		
13	1/2	350	350	10	31,8	50	19	3/8 (06)	CAG-601-N06-W66
		5075	5075	.39	1.25	1.97	.75		
19	3/4	350	350	17	41,3	60	26	3/4	CAG-602-N-W66
		5075	5075	.67	1.63	2.36	1.02		
19	3/4	350	350	12	41,3	60	26	1/2 (08)	CAG-602-N08-W66
		5075	5075	.47	1.63	2.36	1.02		
25	1	350	350	22	47,6	70	32	1	CAG-603-N-W66
		5075	5075	.87	1.87	2.76	1.26		
25	1	350	350	17	47,6	70	32	3/4 (12)	CAG-604-N12-W66
		5075	5075	.67	1.87	2.76	1.26		
32	1-1/4	250	250	27	54	75	36	1-1/4	CAG-604-N-W66 <sup>2</sup>
		3625	3625	1.06	2.13	2.95	1.42		
32	1-1/4	250	250	22	54	75	36	1 (16)	CAG-604-N16-W66
		3625	3625	.87	2.13	2.95	1.42		
38	1-1/2	250	250	30	63,5	80	41	1-1/2	CAG-605-N-W66
		3625	3625	1.18	2.50	3.15	1.61		
38	1-1/2	250	250	27	63,5	80	41	1-1/4 (20)	CAG-605-N20-W66
		3625	3625	1.06	2.50	3.15	1.61		
51	2	200	200	40	79,4	90	55	2	CAG-606-N-W66
		2900	2900	1.57	3.13	3.54	2.17		
51	2	200	200	30	79,4	90	55	1-1/2 (24)	CAG-606-N24-W66
		2900	2900	1.18	3.13	3.54	2.17		

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG-604-N-\*/\*\*/\*\*\*-M14#K).

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated CAG-...-N-W66
- \* SAE Counterflange Adaptor made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated CSG-...-N-W66
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) CAG-...-N-W5
- \* Size of connection thread deviating from the standard (e.g. 1/2 NPT) CAG-...-N08-W66
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) CAG-...-N-W66-K
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) CAG-...-N-V-W66-K
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) CAG-...-N-MH-W130-K
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) CAG-...-N-U-W130-K



## SAE Flange Adaptor with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type CAG-L/S • 3000 PSI Series

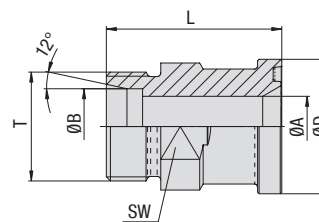

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		Series	ØD	L	SW	T (Metric)	Weight (kg/lbs) Ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB							
13	1/2	315	315	12	15	L	30,2	48	24	22x1,5	12,6	CAG-301-15L-W66
		4568	4568	.47	.59		1.19	1.89	.94		27.72	
13	1/2	350	350	12	16	S	30,2	50	24	24x1,5	13,0	CAG-301-16S-W66
		5075	5075	.47	.63		1.19	1.97	.94		28.60	
19	3/4	315	315	15	18	L	38,1	53	30	26x1,5	23,1	CAG-302-18L-W66
		4568	4568	.59	.71		1.50	2.09	1.18		50.71	
19	3/4	350	350	16	20	S	38,1	57	30	30x2	24,2	CAG-302-20S-W66
		5075	5075	.63	.79		1.50	2.24	1.18		53.24	
19	3/4	160	160	19	22	L	38,1	53	30	30x2	20,1	CAG-302-22L-W66
		2320	2320	.75	.87		1.50	2.09	1.18		44.11	
19	3/4	350	350	17	25	S	38,1	57	30	36x2	25,6	CAG-302-25S-W66
		5075	5075	.67	.98		1.50	2.24	1.18		56.36	
19	3/4	160	160	19	28	L	38,1	53	30	36x2	21,7	CAG-302-28L-W66
		2320	2320	.75	1.10		1.50	2.09	1.18		47.81	
25	1	250	315	20	25	S	44,45	58	36	36x2	34,5	CAG-303-25S-W66
		3625	4568	.79	.98		1.75	2.28	1.42		75.90	
25	1	160	160	24	28	L	44,45	54	36	36x2	28,3	CAG-303-28L-W66
		2320	2320	.94	1.10		1.75	2.13	1.42		62.26	
25	1	250	315	24	30	S	44,45	63	36	42x2	35,2	CAG-303-30S-W66
		3625	4568	.94	1.18		1.75	2.48	1.42		77.44	
32	1-1/4	200	250	20	25	S	50,8	60	41	36x2	46,6	CAG-304-25S-W66
		2900	3625	.79	.98		2.00	2.36	1.61		102.52	
32	1-1/4	160	160	22	28	L	50,8	59	41	36x2	43,5	CAG-304-28L-W66
		2320	2320	.87	1.10		2.00	2.32	1.61		95.80	
32	1-1/4	200	250	25	30	S	50,8	62	41	42x2	44,8	CAG-304-30S-W66
		2900	3625	.98	1.18		2.00	2.44	1.61		98.56	
32	1-1/4	160	160	30	35	L	50,8	58	41	45x2	35,9	CAG-304-35L-W66
		2320	2320	1.18	1.38		2.00	2.28	1.61		78.98	
32	1-1/4	200	250	28	38	S	50,8	67	46	52x2	54,4	CAG-304-38S-W66
		2900	3625	1.10	1.50		2.00	2.64	1.81		119.68	
38	1-1/2	200	200	32	38	S	60,35	70	46	52x2	62,3	CAG-305-38S-W66
		2900	2900	1.26	1.50		2.38	2.76	1.81		137.06	
38	1-1/2	160	160	36	42	L	60,35	64	46	52x2	47,7	CAG-305-42L-W66
		2320	2320	1.42	1.65		2.38	2.52	1.81		104.90	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples


- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CAG-...-W66**
- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **CAG-...-W3**
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4571 (on request) **CAG-...-W5**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG-...-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG-...-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG-...-U-W130-K**

Please always indicate ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.



## SAE Flange Adaptor with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type CAG-L/S • 6000 PSI Series

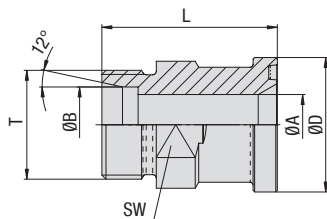

B

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		Series	ØD	L	SW	T (Metric)	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB							
13	1/2	350	420	12	16	S	31,8	53	24	24x1,5	1,5	CAG-601-16S-W66
		5075	6090	.47	.63		1.25	2.09	.94		3.30	
19	3/4	350	420	12	16	S	41,3	59	30	24x1,5	29,5	CAG-602-16S-W66
		5075	6090	.47	.63		1.63	2.32	1.18		64.90	
19	3/4	350	400	16	20	S	41,3	61	30	30x2	28,5	CAG-602-20S-W66
		5075	5800	.63	.79		1.63	2.40	1.18		62.74	
19	3/4	350	400	17	25	S	41,3	63	30	36x2	30,4	CAG-602-25S-W66
		5075	5800	.67	.98		1.63	2.48	1.18		66.84	
19	3/4	350	400	18	30	S	41,3	64	36	42x2	36,8	CAG-602-30S-W66
		5075	5800	.71	1.18		1.63	2.52	1.42		80.96	
25	1	350	400	20	25	S	47,6	72	36	36x2	49,8	CAG-603-25S-W66
		5075	5800	.79	.98		1.87	2.83	1.42		109.56	
25	1	350	400	24	30	S	47,6	74	36	42x2	47,7	CAG-603-30S-W66
		5075	5800	.94	1.18		1.87	2.91	1.42		104.94	
32	1-1/4	350	400	25	30	S	54	79	41	42x2	62,1	CAG-604-30S-W66 <sup>2</sup>
		5075	5800	.98	1.18		2.13	3.11	1.61		136.62	
32	1-1/4	350	350	30	38	S	54	83	46	52x2	66,1	CAG-604-38S-W66 <sup>2</sup>
		5075	5075	1.18	1.50		2.13	3.27	1.81		145.42	
38	1-1/2	350	350	30	38	S	63,5	89	46	52x2	92,2	CAG-605-38S-W66
		5075	5075	1.18	1.50		2.50	3.50	1.81		202.77	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG-604-S30-M14#K).


### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated CAG-...-W66
- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) CAG-...-W3
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4571 (on request) CAG-...-W5
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) CAG-...-W66-K
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) CAG-...-V-W66-K
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) CAG-...-MH-W130-K
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) CAG-...-U-W130-K

Please always indicate ØB and Series.



## SAE 90° Butt-Weld Flange Adaptor Type CAG90-ST ▪ 3000 PSI Series

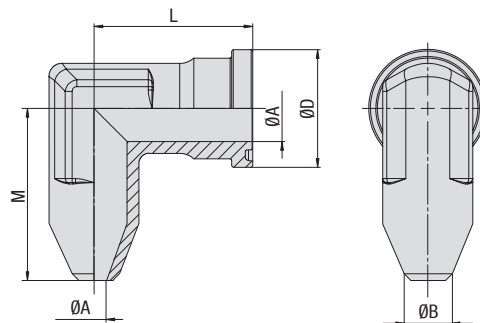

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)							Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	ØD	L	M		
13	1/2	350	350	11	15	30,2	39	38	16,0	CAG90-301-ST-15/11-W1
		5075	5075	.43	.59	1.19	1.54	1.50	35.20	
13	1/2	350	350	12	16	30,2	39	38	17,9	CAG90-301-ST-16/12-W1
		5075	5075	.47	.63	1.19	1.54	1.50	39.34	
13	1/2	350	350	14	21,3	30,2	39	38	17,0	CAG90-301-ST-21.3/14-W1
		5075	5075	.55	.84	1.19	1.54	1.50	37.40	
19	3/4	350	350	15	18	38,1	42	45	66,0	CAG90-302-ST-18/15-W1
		5075	5075	.59	.71	1.50	1.65	1.77	145.20	
19	3/4	350	350	14	20	38,1	42	45	35,4	CAG90-302-ST-20/14-W1
		5075	5075	.55	.79	1.50	1.65	1.77	77.96	
19	3/4	350	350	16	22	38,1	42	45	29,0	CAG90-302-ST-22/16-W1
		5075	5075	.63	.87	1.50	1.65	1.77	63.80	
19	3/4	350	350	19	26,9	38,1	42	45	30,0	CAG90-302-ST-26.9/19-W1
		5075	5075	.75	1.06	1.50	1.65	1.77	66.00	
25	1	250	315	19	25	44,45	45	50	82,1	CAG90-303-ST-25/19-W1
		3625	4568	.75	.98	1.75	1.77	1.97	180.62	
25	1	250	315	22	30	44,45	45	50	50,3	CAG90-303-ST-30/22-W1
		3625	4568	.87	1.18	1.75	1.77	1.97	110.66	
25	1	250	315	25	33,7	44,45	45	50	41,0	CAG90-303-ST-33.7/25-W1
		3625	4568	.98	1.33	1.75	1.77	1.97	90.20	
32	1-1/4	200	250	19	25	50,8	50	59	117,2	CAG90-304-ST-25/19-W1
		2900	3625	.75	.98	2.00	1.97	2.32	257.84	
32	1-1/4	200	250	22	30	50,8	50	59	35,0	CAG90-304-ST-30/22-W1
		2900	3625	.87	1.18	2.00	1.97	2.32	77.00	
32	1-1/4	200	250	31	35	50,8	50	59	52,4	CAG90-304-ST-35/31-W1
		2900	3625	1.22	1.38	2.00	1.97	2.32	115.28	
32	1-1/4	200	250	28	38	50,8	50	59	97,0	CAG90-304-ST-38/28-W1
		2900	3625	1.10	1.50	2.00	1.97	2.32	213.40	
32	1-1/4	200	250	32	42,4	50,8	50	59	71,0	CAG90-304-ST-42.4/32-W1
		2900	3625	1.26	1.67	2.00	1.97	2.32	156.20	
38	1-1/2	200	200	28	38	60,35	76	56	75,0	CAG90-305-ST-38/28-W1
		2900	2900	1.10	1.50	2.38	2.99	2.20	165.00	
38	1-1/2	200	200	36	42	60,35	76	56	70,9	CAG90-305-ST-42/36-W1
		2900	2900	1.42	1.65	2.38	2.99	2.20	155.98	
38	1-1/2	200	200	38	48,3	60,35	76	56	65,0	CAG90-305-ST-48.3/38-W1
		2900	2900	1.50	1.90	2.38	2.99	2.20	143.00	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

CAG90-...-ST-\*\*-\*\*/W1  
CAG90-...-ST-\*\*-\*\*/W5

- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


CAG90-...-ST-\*\*-\*\*/W57-K  
CAG90-...-ST-\*\*-\*\*/V-W57-K  
CAG90-...-ST-\*\*-\*\*/MH-W129-K  
CAG90-...-ST-\*\*-\*\*/U-W129-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.



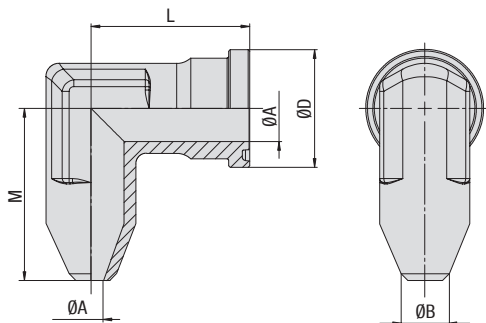


**SAE 90° Butt-Weld Flange Adaptor  
Type CAG90-ST • 6000 PSI Series**

**B**
**6000 PSI High Pressure Series (according to ISO 6162-2:2002)**

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)					Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	ØD	L	M		
13	1/2	350	420	10	16	31,8	39	38	20,7	CAG90-601-ST-16/10-W1
		5075	6090	.39	.63	1.25	1.54	1.50	45.54	
13	1/2	350	420	12	21,3	31,8	39	38	20,7	CAG90-601-ST-21.3/12-W1
		5075	6090	.47	.84	1.25	1.54	1.50	45.54	
19	3/4	350	420	10	16	41,3	48	48	89,5	CAG90-602-ST-16/10-W1
		5075	6090	.39	.63	1.63	1.89	1.89	196.90	
19	3/4	350	420	12	20	41,2	48	48	46,0	CAG90-602-ST-20/12-W1
		5075	6090	.47	.79	1.62	1.89	1.89	101.15	
19	3/4	350	420	17	25	41,3	48	48	43,1	CAG90-602-ST-25/17-W1
		5075	6090	.67	.98	1.63	1.89	1.89	94.82	
19	3/4	350	420	16	26,9	41,3	48	48	43,6	CAG90-602-ST-26.9/16-W1
		5075	6090	.63	1.06	1.63	1.89	1.89	95.92	
25	1	350	420	17	25	47,6	60	60	73,0	CAG90-603-ST-25/17-W1
		5075	6090	.67	.98	1.87	2.36	2.36	160.60	
25	1	350	420	22	60	47,6	60	60	74,9	CAG90-603-ST-30/22-W1
		5075	6090	.87	1.18	1.87	2.36	2.36	164.78	
25	1	350	420	25	33,7	47,6	60	60	63,0	CAG90-603-ST-33.7/25-W1
		5075	6090	.98	1.33	1.87	2.36	2.36	138.60	
25	1	350	420	21	33,7	47,6	60	60	69,1	CAG90-603-ST-33.7/21-W1
		5075	6090	.83	1.33	1.87	2.36	2.36	152.02	
32	1-1/4	350	420	22	60	54	68	68	89,0	CAG90-604-ST-30/22-W1 <sup>2</sup>
		5075	6090	.87	1.18	2.13	2.68	2.68	195.80	
32	1-1/4	350	420	28	38	54	68	68	94,3	CAG90-604-ST-38/28-W1 <sup>2</sup>
		5075	6090	1.10	1.50	2.13	2.68	2.68	207.46	
32	1-1/4	350	420	60	42,4	54	68	68	92,1	CAG90-604-ST-42.4/30-W1 <sup>2</sup>
		5075	6090	1.18	1.67	2.13	2.68	2.68	202.62	
32	1-1/4	350	420	22	38	54	68	68	109,4	CAG90-604-ST-38/22-W1 <sup>2</sup>
		5075	6090	.87	1.50	2.13	2.68	2.68	240.68	
38	1-1/2	350	420	28	38	63,5	76	76	167,2	CAG90-605-ST-38/28-W1
		5075	6090	1.10	1.50	2.50	2.99	2.99	367.84	
38	1-1/2	350	420	22	38	63,5	76	76	146,6	CAG90-605-ST-38/22-W1
		5075	6090	.87	1.50	2.50	2.99	2.99	322.52	
38	1-1/2	350	420	34	48,3	63,6	76	76	148,6	CAG90-605-ST-48.3/34-W1
		5075	6090	1.34	1.90	2.50	2.99	2.99	326.92	
38	1-1/2	350	420	32	48,3	63,5	76	76	148,6	CAG90-605-ST-48.3/32-W1
		5075	6090	1.26	1.90	2.50	2.99	2.99	326.92	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (CAG90-604-ST-30/22-M14#K).

**Materials / Ordering Options / Examples**

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

CAG90-...-ST-\*\*-\*\*-W1  
CAG90-...-ST-\*\*-\*\*-W5


- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

CAG90-...-ST-\*\*-\*\*-W57-K  
CAG90-...-ST-\*\*-\*\*-V-W57-K  
CAG90-...-ST-\*\*-\*\*-MH-W129-K  
CAG90-...-ST-\*\*-\*\*-U-W129-K

Please always indicate ØB / ØA.



## SAE 90° Flange Adaptor with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type CAG90-L/S • 3000 PSI Series

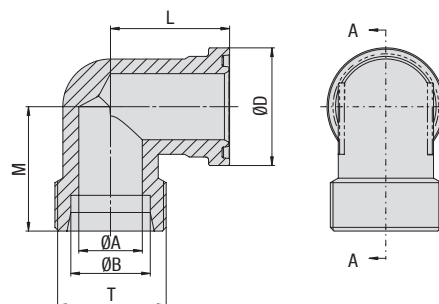

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		Series	ØD	L	M	T (Metric)	Weight (kg/lbs) Ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB							
13	1/2	315	315	12	15	L	30,2	39	36	22x1,5	16,4	CAG90-301-15L-W66
		4568	4568	.47	.59		1.19	1.54	1.42		36.08	
13	1/2	350	350	12	16	S	30,2	39	38	24x1,5	17,2	CAG90-301-16S-W66
		5075	5075	.47	.63		1.19	1.54	1.50		37.84	
19	3/4	315	315	15	18	L	38,1	42	39	26x1,5	30,2	CAG90-302-18L-W66
		4568	4568	.59	.71		1.50	1.65	1.54		66.44	
19	3/4	350	350	16	20	S	38,1	42	43	30x2	33,4	CAG90-302-20S-W66
		5075	5075	.63	.79		1.50	1.65	1.69		73.48	
19	3/4	160	160	19	22	L	38,1	42	41	30x2	28,8	CAG90-302-22L-W66
		2320	2320	.75	.87		1.50	1.65	1.61		63.36	
19	3/4	350	350	17	25	S	38,1	42	45	36x2	35,6	CAG90-302-25S-W66
		5075	5075	.67	.98		1.50	1.65	1.77		78.32	
25	1	250	315	20	25	S	44,45	45	48,5	36x2	52,3	CAG90-303-25S-W66
		3625	4568	.79	.98		1.75	1.77	1.91		115.06	
25	1	160	160	24	28	L	44,45	45	45,5	36x2	40,7	CAG90-303-28L-W66
		2320	2320	.94	1.10		1.75	1.77	1.79		89.54	
25	1	250	315	24	30	S	44,45	45	50	42x2	47,2	CAG90-303-30S-W66
		3625	4568	.94	1.18		1.75	1.77	1.97		103.84	
32	1-1/4	200	250	20	25	S	50,8	50	55	36x2	70,8	CAG90-304-25S-W66
		2900	3625	.79	.98		2.00	1.97	2.17		155.76	
32	1-1/4	200	250	25	30	S	50,8	50	57	42x2	67,5	CAG90-304-30S-W66
		2900	3625	.98	1.18		2.00	1.97	2.24		148.50	
32	1-1/4	160	160	30	38	L	50,8	50	57	45x2	56,5	CAG90-304-35L-W66
		2320	2320	1.18	1.50		2.00	1.97	2.24		124.30	
32	1-1/4	200	250	28	38	S	50,8	50	59	52x2	71,5	CAG90-304-38S-W66
		2900	3625	1.10	1.50		2.00	1.97	2.32		157.30	
38	1-1/2	200	200	32	38	S	60,35	55	64	52x2	138,4	CAG90-305-38S-W66
		2900	2900	1.26	1.50		2.38	2.17	2.52		304.48	
38	1-1/2	160	160	36	42	L	60,35	55	58	52x2	75,4	CAG90-305-42L-W66
		2320	2320	1.42	1.65		2.38	2.17	2.28		165.93	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **CAG90-...-W66**
- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **CAG90-...-W3**
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **CAG90-...-W5**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG90-...-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG90-...-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG90-...-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG90-...-U-W130-K**


Please always indicate ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.





## SAE 90° Flange Adaptor with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type CAG90-L/S • 6000 PSI Series

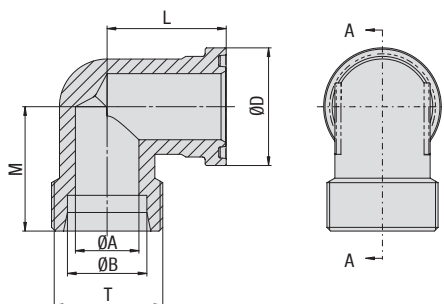

B

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)			ØD	L	M	T (Metric)	Weight (kg/lbs) Ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB							
13	1/2	350	420	12	16	S	31,8	39	37,9	24x1,5	18,9	CAG90-601-16S-W66
		5075	6090	.47	.63		1.25	1.54	1.49		41.58	
19	3/4	350	420	12	16	S	41,3	48	45	24x1,5	42,3	CAG90-602-16S-W66
		5075	6090	.47	.63		1.63	1.89	1.77		93.06	
19	3/4	350	400	16	20	S	41,3	48	46	30x2	43,0	CAG90-602-20S-W66
		5075	5800	.63	.79		1.63	1.89	1.81		94.60	
19	3/4	350	400	17	25	S	41,3	48	48	36x2	43,6	CAG90-602-25S-W66
		5075	5800	.67	.98		1.63	1.89	1.89		95.92	
25	1	350	400	20	25	S	47,6	60	53	36x2	73,4	CAG90-603-25S-W66
		5075	5800	.79	.98		1.87	2.36	2.09		161.48	
25	1	350	400	24	30	S	47,6	60	55	42x2	63,2	CAG90-603-30S-W66
		5075	5800	.94	1.18		1.87	2.36	2.17		139.04	
32	1-1/4	350	400	25	30	S	54	68	58	42x2	89,3	CAG90-604-30S-W66 <sup>2</sup>
		5075	5800	.98	1.18		2.13	2.68	2.28		196.46	
32	1-1/4	350	350	30	38	S	54	68	61	52x2	88,7	CAG90-604-38S-W66 <sup>2</sup>
		5075	5075	1.18	1.50		2.13	2.68	2.40		195.14	
38	1-1/2	350	350	25	30	S	63,5	76	72	42x2	177,2	CAG90-605-30S-W66
		5075	5075	.98	1.18		2.50	2.99	2.83		389.84	
38	1-1/2	350	350	30	38	S	63,5	76	72	52x2	147,1	CAG90-605-38S-W66
		5075	5075	1.18	1.50		2.50	2.99	2.83		323.62	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG90-604-S30-M14#K).

























### Materials / Ordering Options / Examples

- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated CAG90-...-W66
- \* SAE Flange Adaptor (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) CAG90-...-V-W66-K
- \* SAE Flange Adaptor (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) CAG90-...-U-W66-K
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) CAG90-...-MH-W130-K
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) CAG90-...-U-W130-K
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

Please always indicate ØB and Series.






	<b>SAE Single-Part Flange with Female BSPP Thread</b> BFX-G	40		<b>SAE 90° Single-Part Flange with Female BSPP Thread</b> BFX90-G	71
	<b>SAE Single-Part Counterflange with Female BSPP Thread</b> BAS-G	42		<b>SAE 90° Single-Part Flange with Female NPT Thread</b> BFX90-N	72
	<b>SAE Single-Part Flange with Female NPT Thread</b> BFX-N	44		<b>SAE 90° Single-Part Butt-Weld Flange for High Pressure Tubes</b> BFX90-STC	73
	<b>SAE Single-Part Counterflange with Female NPT Thread</b> BAS-N	46		<b>SAE 90° Single-Part Butt-Weld Flange for Metric Tubes</b> BFX90-SRE	74
	<b>SAE Single-Part Flange with Female UN/UNF Thread</b> BFX-U	48		<b>SAE 90° Single-Part Socket-Weld Flange</b> BFX90-ES	76
	<b>SAE Single-Part Butt-Weld Flange for High Pressure Tubes</b> BFX-ST	50		<b>SAE 90° Single-Part Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)</b> BFX90-L/S	78
	<b>SAE Single-Part Butt-Weld Counterflange for High Pressure Tubes</b> BAS-ST	52			
	<b>SAE Single-Part Butt-Weld Flange for Low Pressure Tubes</b> BFX-STRE	54			
	<b>SAE Single-Part Butt-Weld Counterflange for Low Pressure Tubes</b> BAS-STRE	55			
	<b>SAE Single-Part Butt-Weld Flange for Metric Tubes</b> BFX-SRE	56			
	<b>SAE Single-Part Butt-Weld Counterflange for Metric Tubes</b> BAS-SRE	58			
	<b>SAE Single-Part Socket-Weld Flange</b> BFX-ES	60			
	<b>SAE Single-Part Socket-Weld Counterflange</b> BAS-ES	62			
	<b>SAE Single-Part Socket-Weld Flange (Flat Style)</b> BFX-FL-ES	64			
	<b>SAE Single-Part Socket-Weld Counterflange (Flat Style)</b> BAS-FL-ES	65			
	<b>SAE Single-Part Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)</b> BFX-L/S	66			
	<b>SAE Single-Part Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200)</b> BFX-B	68			
	<b>SAE Single-Part Flange with Male UN/UNF Thread and 37° JIC Taper (acc. to ISO 8434-2 / SAE J514)</b> BFX-J	70			



## SAE Single-Part Flange with Female BSPP Thread Type BFX-G • 3000 PSI Series

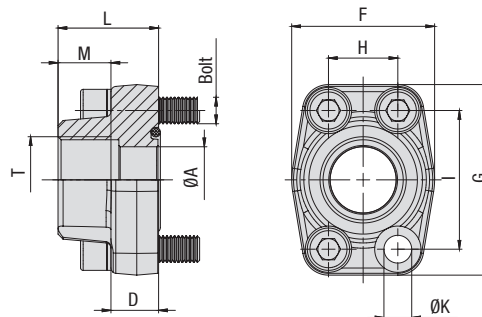

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /psi)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )								Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		for Bolts		Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (BSPP)	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>		UNC
13	1/2	350 5075	350 5075	13 .51	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	15 .59	1/2	8,7 .34	27,6 60.72	M8x30	5/16–18 UNC x 1-1/4	BFX-301-G-W1
13	1/2	350 5075	350 5075	13 .51	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	20 .79	3/8 (06)	8,7 .34	29,3 64.46	M8x30	5/16–18 UNC x 1-1/4	BFX-301-G06-W1
19	3/4	350 5075	350 5075	19 .75	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	18 .71	3/4	10,5 .41	38,6 84.92	M10x35	3/8–16 UNC x 1-1/2	BFX-302-G-W1
19	3/4	350 5075	350 5075	13 .51	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	15 .59	1/2 (08)	10,5 .41	40,3 88.66	M10x35	3/8–16 UNC x 1-1/2	BFX-302-G08-W1
25	1	250 3625	315 4568	25 .98	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	20 .79	1	10,5 .41	45,4 99.88	M10x35	3/8–16 UNC x 1-1/2	BFX-303-G-W1
25	1	250 3625	315 4568	19 .75	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	18 .71	3/4 (12)	10,5 .41	54,0 118.80	M10x35	3/8–16 UNC x 1-1/2	BFX-303-G12-W1
32	1-1/4	200 2900	250 3625	31 1.22	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	22 .87	1-1/4	11,5 (13,5) .45 (.53)	67,9 149.38	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-G-W1
32	1-1/4	200 2900	250 3625	25 .98	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	20 .79	1 (16)	11,5 (13,5) .45 (.53)	85,5 188.10	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-G16-W1
38	1-1/2	200 2900	200 2900	38 1.50	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	24 .94	1-1/2	13,5 (14,5) .53 (.57)	113,9 250.58	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-G-W1
38	1-1/2	200 2900	200 2900	31 1.22	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	22 .87	1-1/4 (20)	13,5 (14,5) .53 (.57)	119,7 263.34	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-G20-W1
51	2	160 2320	200 2900	50 1.97	25,5 1.00	88 3.46	102 4.02	42,9 1.69	77,8 3.06	45 1.77	26 1.02	2	13,5 (14,5) .53 (.57)	120,4 264.88	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-G-W1
51	2	160 2320	200 2900	38 1.50	25,5 1.00	88 3.46	102 4.02	42,9 1.69	77,8 3.06	45 1.77	24 .94	1-1/2 (24)	13,5 (14,5) .53 (.57)	154,6 340.12	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-G24-W1
64	2-1/2	100 1450	160 2320	63 2.48	26 1.02	101 3.98	115 4.53	50,8 2.00	88,9 3.50	50 1.97	30 1.18	2-1/2	13,5 (14,5) .53 (.57)	154,5 339.90	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-G-W1
64	2-1/2	100 1450	160 2320	50 1.97	26 1.02	101 3.98	115 4.53	50,8 2.00	88,9 3.50	50 1.97	26 1.02	2 (32)	13,5 (14,5) .53 (.57)	201,8 443.96	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-G32-W1
76	3	100 1450	160 2320	73 2.87	27,5 1.08	127 5.00	137 5.39	61,9 2.44	106,4 4.19	50 1.97	30 1.18	3	17 .67	215,0 473.00	M16x50	5/8–11 UNC x 2	BFX-308-G-W1
76	3	100 1450	160 2320	63 2.48	27,5 1.08	127 5.00	137 5.39	61,9 2.44	106,4 4.19	50 1.97	30 1.18	2-1/2 (40)	17 .67	257,2 565.84	M16x50	5/8–11 UNC x 2	BFX-308-G40-W1
89	3-1/2	35 508	35 508	89 3.50	27,5 1.08	138 5.43	155 6.10	69,8 2.75	120,7 4.75	50 1.97	30 1.18	3-1/2	17 .67	247,2 543.84	M16x50	5/8–11 UNC x 2	BFX-309-G-W1
102	4	35 508	35 508	99 3.90	27,5 1.08	147 5.79	163 6.42	77,8 3.06	130,2 5.13	50 1.97	30 1.18	4	17 .67	292,5 643.50	M16x50	5/8–11 UNC x 2	BFX-310-G-W1
127	5	35 508	35 508	120 4.72	28 1.10	180 7.09	184 7.24	92 3.62	152,4 6.00	50 1.97	30 1.18	5	17 .67	365,0 803.00	M16x55	5/8–11 UNC x 2-1/4	BFX-311-G-W1

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-G-W1  
BFX-...-G-W5

- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP)

BFX-...-G20-W1


- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-G-W46-K  
BFX-...-G-V-W46-K  
BFX-...-G-MH-W1-K  
BFX-...-G-U-W1-K

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



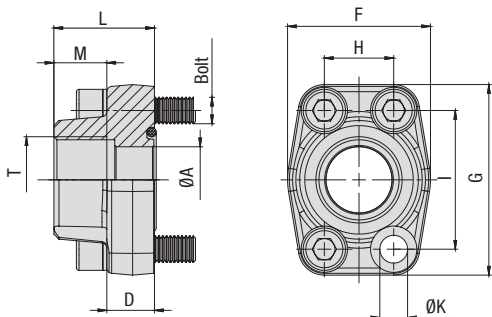

## SAE Single-Part Flange with Female BSPP Thread Type BFX-G • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )									Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (BSPP)	ØK	per 100	Metric	UNC	
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	15	1/2	8,7	27,2	M8x30	5/16–18 UNC x 1-1/4	BFX-601-G-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.59		.34	59.84			
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	20	3/8 (06)	8,7	29,3	M8x30	5/16–18 UNC x 1-1/4	BFX-601-G06-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.79		.34	64.46			
19	3/4	350	420	19	19,5	54	72	23,8	50,8	36	18	3/4	10,5	54,3	M10x35	3/8–16 UNC x 1-1/2	BFX-602-G-W1
		5075	6090	.75	.77	2.13	2.83	.94	2.00	1.42	.71		.41	119.46			
19	3/4	350	420	14	19,5	54	72	23,8	50,8	36	15	1/2 (08)	10,5	55,7	M10x35	3/8–16 UNC x 1-1/2	BFX-602-G08-W1
		5075	6090	.55	.77	2.13	2.83	.94	2.00	1.42	.59		.41	122.54			
25	1	350	420	25	24,5	68	82	27,8	57,2	44	20	1	13	83,7	M12x45	7/16–14 UNC x 1-3/4	BFX-603-G-W1 <sup>2</sup>
		5075	6090	.98	.96	2.68	3.23	1.09	2.25	1.73	.79		.51	184.14			
25	1	350	420	19	24,5	68	82	27,8	57,2	44	18	3/4 (12)	13	80,0	M12x45	7/16–14 UNC x 1-3/4	BFX-603-G12-W1 <sup>2</sup>
		5075	6090	.75	.96	2.68	3.23	1.09	2.25	1.73	.71		.51	176.00			
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4	13,5	119,3	M12x45	1/2–13 UNC x 1-3/4	BFX-604-G-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87		.53	262.46			
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4	15	112,6	M14x45		BFX-604-G-M14-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87		.59	247.72			
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1	13,5	122,0	M12x45	1/2–13 UNC x 1-3/4	BFX-604-G16-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79		.53	268.40			
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1	15	118,4	M14x45		BFX-604-G16-M14-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79		.59	260.48			
38	1-1/2	350	420	38	31	88	108	36,5	79,3	51	24	1-1/2	17	183,3	M16x55	5/8–11 UNC x 2-1/4	BFX-605-G-W1
		5075	6090	1.50	1.22	3.46	4.25	1.44	3.12	2.01	.94		.67	403.26			
38	1-1/2	350	420	31	31	88	108	36,5	79,3	51	22	1-1/4 (20)	17	196,0	M16x55	5/8–11 UNC x 2-1/4	BFX-605-G20-W1
		5075	6090	1.22	1.22	3.46	4.25	1.44	3.12	2.01	.87		.67	431.20			
51	2	350	420	50	37	118	137	44,5	96,8	65	33	2	21	327,9	M20x70	3/4–10 UNC x 2-3/4	BFX-606-G-W1
		5075	6090	1.97	1.46	4.65	5.39	1.75	3.81	2.56	1.30		.83	721.38			
64	2-1/2	350	420	63	45	152	180	58,7	123,8	80	35	2-1/2	26	678,1	M24x80		BFX-607-G-W1
		5075	6090	2.48	1.77	5.98	7.09	2.31	4.87	3.15	1.38		1.02	1491.82			

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-G-W1  
BFX-...-G-W5

- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP)

BFX-...-G20-W1


- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-G-W46-K  
BFX-...-G-V-W46-K  
BFX-...-G-MH-W1-K  
BFX-...-G-U-W1-K





## SAE Single-Part Counterflange with Female BSPP Thread Type BAS-G ▪ 3000 PSI Series

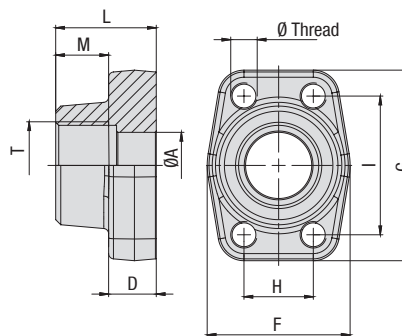

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (BSPP)	per 100	Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	16	47	57	17,5	38,1	36	15	1/2	29,0	M8	5/16–18 UNC	BAS-301-G-W1
		5075	5075	.51	.63	1.85	2.24	.69	1.50	1.42	.59		63.80			
13	1/2	350	350	13	16	47	57	17,5	38,1	36	20	3/8 (06)	30,8	M8	5/16–18 UNC	BAS-301-G06-W1
		5075	5075	.51	.63	1.85	2.24	.69	1.50	1.42	.79		67.76			
19	3/4	350	350	19	18	50	67	22,3	47,6	36	18	3/4	41,4	M10	3/8–16 UNC	BAS-302-G-W1
		5075	5075	.75	.71	1.97	2.64	.88	1.87	1.42	.71		91.08			
19	3/4	350	350	13	18	50	67	22,3	47,6	36	15	1/2 (08)	43,4	M10	3/8–16 UNC	BAS-302-G08-W1
		5075	5075	.51	.71	1.97	2.64	.88	1.87	1.42	.59		95.48			
25	1	250	315	25	18	54	72	26,2	52,4	38	20	1	47,0	M10	3/8–16 UNC	BAS-303-G-W1
		3625	4568	.98	.71	2.13	2.83	1.03	2.06	1.50	.79		103.40			
25	1	250	315	19	18	54	72	26,2	52,4	38	18	3/4 (12)	56,7	M10	3/8–16 UNC	BAS-303-G12-W1
		3625	4568	.75	.71	2.13	2.83	1.03	2.06	1.50	.71		124.74			
32	1-1/4	200	250	31	21	68	82	30,2	58,7	41	22	1-1/4	69,5	M10 (M12)	7/16–14 UNC	BAS-304-G-W1
		2900	3625	1.22	.83	2.68	3.23	1.19	2.31	1.61	.87		152.90			
32	1-1/4	200	250	25	21	68	82	30,2	58,7	41	20	1 (16)	84,4	M10 (M12)	7/16–14 UNC	BAS-304-G16-W1
		2900	3625	.98	.83	2.68	3.23	1.19	2.31	1.61	.79		185.68			
38	1-1/2	200	200	38	25	79	96	35,7	69,9	44	24	1-1/2	114,3	M12 (M14)	1/2–13 UNC	BAS-305-G-W1
		2900	2900	1.50	.98	3.11	3.78	1.41	2.75	1.73	.94		251.46			
38	1-1/2	200	200	31	25	79	96	35,7	69,9	44	22	1-1/4 (20)	124,6	M12 (M14)	1/2–13 UNC	BAS-305-G20-W1
		2900	2900	1.22	.98	3.11	3.78	1.41	2.75	1.73	.87		274.12			
51	2	160	200	50	25,5	88	102	42,9	77,8	45	26	2	125,7	M12 (M14)	1/2–13 UNC	BAS-306-G-W1
		2320	2900	1.97	1.00	3.46	4.02	1.69	3.06	1.77	1.02		276.54			
51	2	160	200	38	25,5	88	102	42,9	77,8	45	24	1-1/2 (24)	158,0	M12 (M14)	1/2–13 UNC	BAS-306-G24-W1
		2320	2900	1.50	1.00	3.46	4.02	1.69	3.06	1.77	.94		347.60			
64	2-1/2	100	160	63	26	101	115	50,8	88,9	50	30	2-1/2	158,1	M12 (M14)	1/2–13 UNC	BAS-307-G-W1
		1450	2320	2.48	1.02	3.98	4.53	2.00	3.50	1.97	1.18		347.82			
64	2-1/2	100	160	50	26	101	115	50,8	88,9	50	26	2 (32)	209,5	M12 (M14)	1/2–13 UNC	BAS-307-G32-W1
		1450	2320	1.97	1.02	3.98	4.53	2.00	3.50	1.97	1.02		460.90			
76	3	100	160	73	27,5	127	137	61,9	106,4	50	30	3	229,4	M16	5/8–11 UNC	BAS-308-G-W1
		1450	2320	2.87	1.08	5.00	5.39	2.44	4.19	1.97	1.18		504.68			
76	3	100	160	63	27,5	127	137	61,9	106,4	50	30	2-1/2 (40)	273,4	M16	5/8–11 UNC	BAS-308-G40-W1
		1450	2320	2.48	1.08	5.00	5.39	2.44	4.19	1.97	1.18		601.48			
89	3-1/2	35	35	89	27,5	138	155	69,8	120,7	50	30	3-1/2	253,0	M16	5/8–11 UNC	BAS-309-G-W1
		508	508	3.50	1.08	5.43	6.10	2.75	4.75	1.97	1.18		556.60			
102	4	35	35	99	27,5	147	163	77,8	130,2	50	30	4	302,5	M16	5/8–11 UNC	BAS-310-G-W1
		508	508	3.90	1.08	5.79	6.42	3.06	5.13	1.97	1.18		665.50			
127	5	35	35	120	28	180	184	92	152,4	50	30	5	379,2	M16	5/8–11 UNC	BAS-311-G-W1
		508	508	4.72	1.10	7.09	7.24	3.62	6.00	1.97	1.18		834.24			

### Materials / Ordering Options / Examples


- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-G-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-G-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-G-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-G-U-W1**
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP) **BAS-...-G20-W1**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.





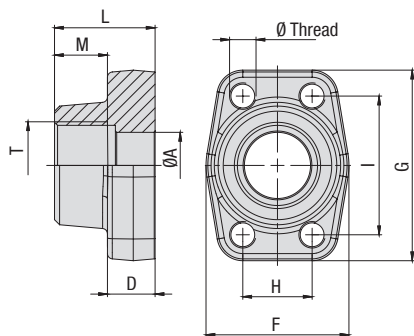

## SAE Single-Part Counterflange with Female BSPP Thread Type BAS-G • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (BSPP)	per 100	Metric	UNC	
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	15	1/2	28,9	M8	5/16-18 UNC	BAS-601-G-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.59		63.58			
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	20	3/8 (06)	31,3	M8	5/16-18 UNC	BAS-601-G06-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.79		68.86			
19	3/4	350	420	19	19,5	54	72	23,8	50,8	36	18	3/4	52,6	M10	3/8-16 UNC	BAS-602-G-W1
		5075	6090	.75	.77	2.13	2.83	.94	2.00	1.42	.71		115.72			
19	3/4	350	420	14	19,5	54	72	23,8	50,8	36	15	1/2 (08)	58,6	M10	3/8-16 UNC	BAS-602-G08-W1
		5075	6090	.55	.77	2.13	2.83	.94	2.00	1.42	.59		128.92			
25	1	350	420	25	24,5	68	82	27,8	57,2	44	20	1	77,9	M12	7/16-14 UNC	BAS-603-G-W1
		5075	6090	.98	.96	2.68	3.23	1.09	2.25	1.73	.79		171.38			
25	1	350	420	19	24,5	68	82	27,8	57,2	44	18	3/4 (12)	88,3	M12	7/16-14 UNC	BAS-603-G12-W1
		5075	6090	.75	.96	2.68	3.23	1.09	2.25	1.73	.71		194.26			
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4	123,8	M12	1/2-13 UNC	BAS-604-G-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87		272.36			
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4 (20)	119,9	M14		BAS-604-G-M14-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87		263.78			
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1 (16)	123,8	M12	1/2-13 UNC	BAS-604-G16-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79		272.36			
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1 (16)	122,4	M14		BAS-604-G16-M14-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79		269.28			
38	1-1/2	350	420	38	31	88	108	36,5	79,3	51	24	1-1/2	186,9	M16	5/8-11 UNC	BAS-605-G-W1
		5075	6090	1.50	1.22	3.46	4.25	1.44	3.12	2.01	.94		411.18			
38	1-1/2	350	420	31	31	88	108	36,5	79,3	51	22	1-1/4 (20)	203,4	M16	5/8-11 UNC	BAS-605-G20-W1
		5075	6090	1.22	1.22	3.46	4.25	1.44	3.12	2.01	.87		447.48			
51	2	350	420	50	37	118	137	44,5	96,8	58	33	2	341,5	M20	3/4-10 UNC	BAS-606-G-W1
		5075	6090	1.97	1.46	4.65	5.39	1.75	3.81	2.28	1.30		751.30			
64	2-1/2	350	420	63	45	152	180	58,7	123,8	80	35	2-1/2	696,0	M24		BAS-607-G-W1
		5075	6090	2.48	1.77	5.98	7.09	2.31	4.87	3.15	1.38		1531.20			


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-G-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-G-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-G-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-G-U-W1**
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP) **BAS-...-G20-W1**



## SAE Single-Part Flange with Female NPT Thread Type BFX-N • 3000 PSI Series

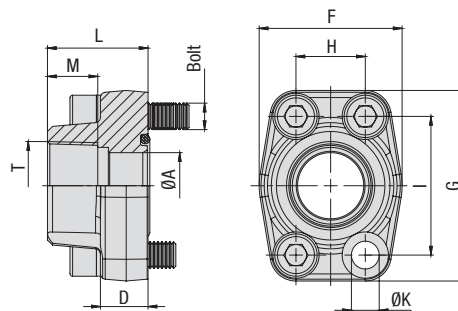

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )								Weight for Bolts ( <sup>kg</sup> / <sub>lbs</sub> ) ca.				Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (NPT)	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>		UNC
13	1/2	350 5075	350 5075	13 .51	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	15 .59	1/2	8,7 .34	27,6 60.72	M8x30	5/16–18 UNC x 1-1/4	BFX-301-N-W1
13	1/2	350 5075	350 5075	13 .51	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	20 .79		3/8 (06)	8,7 .34	30,7 67.54	M8x30	5/16–18 UNC x 1-1/4
19	3/4	350 5075	350 5075	19 .75	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	18 .71	3/4	10,5 .41	38,8 85.36	M10x35	3/8–16 UNC x 1-1/2	BFX-302-N-W1
19	3/4	350 5075	350 5075	13 .51	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	15 .59	1/2 (08)	10,5 .41	40,0 88.00	M10x35	3/8–16 UNC x 1-1/2	BFX-302-N08-W1
25	1	250 3625	315 4568	25 .98	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	20 .79	1	10,5 .41	46,0 101.20	M10x35	3/8–16 UNC x 1-1/2	BFX-303-N-W1
25	1	250 3625	315 4568	19 .75	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	18 .71	3/4 (12)	10,5 .41	53,3 117.26	M10x35	3/8–16 UNC x 1-1/2	BFX-303-N12-W1
32	1-1/4	200 2900	250 3625	31 1.22	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	22 .87	1-1/4	11,5 (13,5) .4 (.53)	69,5 152.90	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-N-W1
32	1-1/4	200 2900	250 3625	25 .98	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	20 .79	1 (16)	11,5 (13,5) .45 (.53)	84,0 184.80	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-N16-W1
38	1-1/2	200 2900	200 2900	38 1.50	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	24 .94	1-1/2	13,5 (14,5) .53 (.57)	106,6 234.52	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-N-W1
38	1-1/2	200 2900	200 2900	31 1.22	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	22 .87	1-1/4 (20)	13,5 (14,5) .53 (.57)	125,8 276.76	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-N20-W1
51	2	160 2320	200 2900	50 1.97	25,5 1.00	88 3.46	102 4.02	42,9 1.69	77,8 3.06	45 1.77	26 1.02	2	13,5 (14,5) .53 (.57)	122,9 270.38	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-N-W1
51	2	160 2320	200 2900	38 1.50	25,5 1.00	88 3.46	102 4.02	42,9 1.69	77,8 3.06	45 1.77	24 .94	1-1/2 (24)	13,5 (14,5) .53 (.57)	150,0 330.00	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-N24-W1
64	2-1/2	100 1450	160 2320	63 2.48	26 1.02	101 3.98	115 4.53	50,8 2.00	88,9 3.50	50 1.97	30 1.18	2-1/2	13,5 (14,5) .53 (.57)	153,9 338.58	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-N-W1
64	2-1/2	100 1450	160 2320	50 1.97	26 1.02	101 3.98	115 4.53	50,8 2.00	88,9 3.50	50 1.97	26 1.02	2 (32)	13,5 (14,5) .53 (.57)	202,9 446.38	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-N32-W1
76	3	100 1450	160 2320	73 2.48	27,5 1.08	127 5.00	137 5.39	61,9 2.44	106,4 4.19	50 1.97	30 1.18	3	17 .67	225,7 496.54	M16x50	5/8–11 UNC x 2	BFX-308-N-W1
76	3	100 1450	160 2320	63 2.48	27,5 1.08	127 5.00	137 5.39	61,9 2.44	106,4 4.19	50 1.97	30 1.18	2-1/2 (40)	17 .67	269,7 593.34	M16x50	5/8–11 UNC x 2	BFX-308-N40-W1
89	3-1/2	35 508	35 508	89 3.50	27,5 1.08	138 5.43	155 6.10	69,8 2.75	120,7 4.75	50 1.97	30 1.18	3-1/2	17 .67	255,0 561.00	M16x50	5/8–11 UNC x 2	BFX-309-N-W1
102	4	35 508	35 508	99 3.90	27,5 1.08	147 5.79	163 6.42	77,8 3.06	130,2 5.13	50 1.97	30 1.18	4	17 .67	286,8 630.96	M16x50	5/8–11 UNC x 2	BFX-310-N-W1
127	5	35 508	35 508	120 4.72	28 1.10	180 7.09	184 7.24	92 3.62	152,4 6.00	50 1.97	30 1.18	5	17 .67	365,2 803.44	M16x55	5/8–11 UNC x 2-1/4	BFX-311-N-W1

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-N-W1  
BFX-...-N-W5

- \* Size of connection thread deviating from the standard (e.g. 1-1/4 NPT)

BFX-...-N20-W1


- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-N-W46-K  
BFX-...-N-V-W46-K  
BFX-...-N-MH-W1-K  
BFX-...-N-U-W1-K

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



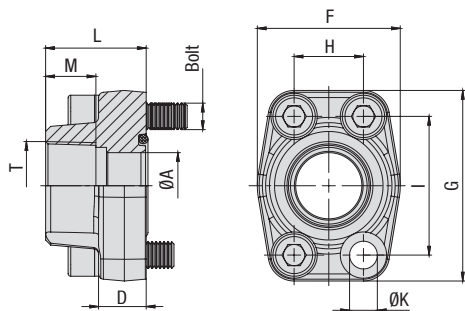

## SAE Single-Part Flange with Female NPT Thread Type BFX-N • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )								Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		for Bolts		Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (NPT)	ØK	per 100	Metric		UNC
13	1/2	350 5075	420 6090	13 .51	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	15 .59	1/2	8,7 .34	27,6 60.72	M8x30	5/16–18 UNC x 1-1/4	BFX-601-N-W1
13	1/2	350 5075	420 6090	13 .51	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	20 .79	3/8 (06)	8,7 .34	31,5 69.30	M8x30	5/16–18 UNC x 1-1/4	BFX-601-N06-W1
19	3/4	350 5075	420 6090	19 .75	19,5 .77	54 2.13	72 2.83	23,8 .94	50,8 2.00	36 1.42	18 .71	3/4	10,5 .41	54,9 120.78	M10x35	3/8–16 UNC x 1-1/2	BFX-602-N-W1
19	3/4	350 5075	420 6090	14 .55	19,5 .77	54 2.13	72 2.83	23,8 .94	50,8 2.00	36 1.42	15 .59	1/2 (08)	10,5 .41	56,3 123.86	M10x35	3/8–16 UNC x 1-1/2	BFX-602-N08-W1
25	1	350 5075	420 6090	25 .98	24,5 .96	68 2.68	82 3.23	27,8 1.09	57,2 2.25	44 1.73	20 .79	1	13 .51	79,0 173.80	M12x45	7/16–14 UNC x 1-3/4	BFX-603-N-W1 <sup>2</sup>
25	1	350 5075	420 6090	19 .75	24,5 .96	68 2.68	82 3.23	27,8 1.09	57,2 2.25	44 1.73	18 .71	3/4 (12)	13 .51	92,9 204.38	M12x45	7/16–14 UNC x 1-3/4	BFX-603-N12-W1 <sup>2</sup>
32	1-1/4	350 5075	420 6090	31 1.22	27,5 1.08	79 3.11	95 3.74	31,6 1.24	66,6 2.62	44 1.73	22 .87	1-1/4	13,5 .53	119,0 261.80	M12x45	1/2–13 UNC x 1-3/4	BFX-604-N-W1
32	1-1/4	350 5075	420 6090	31 1.22	27,5 1.08	79 3.11	95 3.74	31,6 1.24	66,6 2.62	44 1.73	22 .87	1-1/4 (20)	15 .59	114,6 252.12	M14x45		BFX-604-N20-M14-W1
32	1-1/4	350 5075	420 6090	25 .98	27,5 1.08	79 3.11	95 3.74	31,6 1.24	66,6 2.62	44 1.73	20 .79	1	13,5 .53	120,3 264.66	M12x45	1/2–13 UNC x 1-3/4	BFX-604-N16-W1
32	1-1/4	350 5075	420 6090	25 .98	27,5 1.08	79 3.11	95 3.74	31,6 1.24	66,6 2.62	44 1.73	20 .79	1 (16)	15 .59	127,7 280.94	M14x45		BFX-604-N16-M14-W1
38	1-1/2	350 5075	420 6090	38 1.50	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	51 2.01	24 .94	1-1/2	17 .67	190,6 419.32	M16x55	5/8–11 UNC x 2-1/4	BFX-605-N-W1
38	1-1/2	350 5075	420 6090	31 1.22	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	51 2.01	22 .87	1-1/4 (20)	17 .67	185,4 407.88	M16x55	5/8–11 UNC x 2-1/4	BFX-605-N20-W1
51	2	350 5075	420 6090	50 1.97	37 1.46	118 4.65	137 5.39	44,5 1.75	96,8 3.81	65 2.56	33 1.30	2	21 .83	330,5 727.10	M20x70	3/4–10 UNC x 2-3/4	BFX-606-N-W1

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-N-W1  
BFX-...-N-W5

- \* Size of connection thread deviating from the standard (e.g. 1-1/4 NPT)


BFX-...-N20-W1

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-N-W46-K  
BFX-...-N-V-W46-K  
BFX-...-N-MH-W1-K  
BFX-...-N-U-W1-K



## SAE Single-Part Counterflange with Female NPT Thread Type BAS-N • 3000 PSI Series

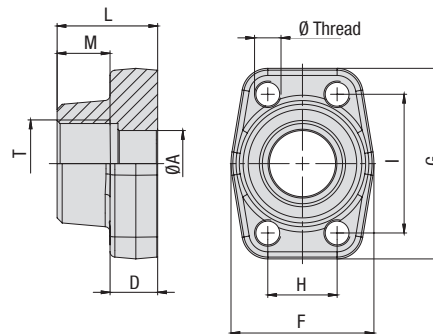

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								T (NPT)	Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M		per 100		Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	16	47	57	17,5	38,1	36	15	1/2	29,0		M8	5/16-18 UNC	BAS-301-N-W1
		5075	5075	.51	.63	1.85	2.24	.69	1.50	1.42	.59		63.80				
13	1/2	350	350	13	16	47	57	17,5	38,1	36	20	3/8 (06)	30,8		M8	5/16-18 UNC	BAS-301-N06-W1
		5075	5075	.51	.63	1.85	2.24	.69	1.50	1.42	.79		67.76				
19	3/4	350	350	19	18	50	67	22,3	47,6	36	18	3/4	40,8		M10	3/8-16 UNC	BAS-302-N-W1
		5075	5075	.75	.71	1.97	2.64	.88	1.87	1.42	.71		89.80				
19	3/4	350	350	13	18	50	67	22,3	47,6	36	15	1/2 (08)	43,6		M10	3/8-16 UNC	BAS-302-N08-W1
		5075	5075	.51	.71	1.97	2.64	.88	1.87	1.42	.59		95.92				
25	1	250	315	25	18	54	72	26,2	52,4	38	20	1	49,5		M10	3/8-16 UNC	BAS-303-N-W1
		3625	4568	.98	.71	2.13	2.83	1.03	2.06	1.50	.79		108.90				
25	1	250	315	19	18	54	72	26,2	52,4	38	18	3/4 (12)	44,6		M10	3/8-16 UNC	BAS-303-N12-W1
		3625	4568	.75	.71	2.13	2.83	1.03	2.06	1.50	.71		98.12				
32	1-1/4	200	250	31	21	68	82	30,2	58,7	41	22	1-1/4	71,2		M10 (M12)	7/16-14 UNC	BAS-304-N-W1
		2900	3625	1.22	.83	2.68	3.23	1.19	2.31	1.61	.87		156.64				
32	1-1/4	200	250	25	21	68	82	30,2	58,7	41	20	1 (16)	85,9		M10 (M12)	7/16-14 UNC	BAS-304-N16-W1
		2900	3625	.98	.83	2.68	3.23	1.19	2.31	1.61	.79		188.98				
38	1-1/2	200	200	38	25	79	96	35,7	69,9	44	24	1-1/2	110,6		M12 (M14)	1/2-13 UNC	BAS-305-N-W1
		2900	2900	1.50	.98	3.11	3.78	1.41	2.75	1.73	.94		243.36				
38	1-1/2	200	200	31	25	79	96	35,7	69,9	44	22	1-1/4 (20)	125,7		M12 (M14)	1/2-13 UNC	BAS-305-N20-W1
		2900	2900	1.22	.98	3.11	3.78	1.41	2.75	1.73	.87		276.54				
51	2	160	200	50	25,5	88	102	42,9	77,8	45	26	2	127,0		M12 (M14)	1/2-13 UNC	BAS-306-N-W1
		2320	2900	1.97	1.00	3.46	4.02	1.69	3.06	1.77	1.02		279.40				
51	2	160	200	38	25,5	88	102	42,9	77,8	45	24	1-1/2 (24)	156,2		M12 (M14)	1/2-13 UNC	BAS-306-N24-W1
		2320	2900	1.50	1.00	3.46	4.02	1.69	3.06	1.77	.94		343.64				
64	2-1/2	100	160	63	26	101	115	50,8	88,9	50	30	2-1/2	176,1		M12 (M14)	1/2-13 UNC	BAS-307-N-W1
		1450	2320	2.48	1.02	3.98	4.53	2.00	3.50	1.97	1.18		387.42				
64	2-1/2	100	160	50	26	101	115	50,8	88,9	50	26	2 (32)	176,1		M12 (M14)	1/2-13 UNC	BAS-307-N32-W1
		1450	2320	1.97	1.02	3.98	4.53	2.00	3.50	1.97	1.02		387.42				
76	3	100	160	73	27,5	127	137	61,9	106,4	50	30	3	233,3		M16	5/8-11 UNC	BAS-308-N-W1
		1450	2320	2.87	1.08	5.00	5.39	2.44	4.19	1.97	1.18		513.26				
76	3	100	160	63	27,5	127	137	61,9	106,4	50	30	2-1/2 (40)	233,3		M16	5/8-11 UNC	BAS-308-N40-W1
		1450	2320	2.48	1.08	5.00	5.39	2.44	4.19	1.97	1.18		513.26				
89	3-1/2	35	35	89	27,5	138	155	69,8	120,7	50	30	3-1/2	253,0		M16	5/8-11 UNC	BAS-309-N-W1
		508	508	3.50	1.08	5.43	6.10	2.75	4.75	1.97	1.18		556.60				
102	4	35	35	99	27,5	147	163	77,8	130,2	50	30	4	287,6		M16	5/8-11 UNC	BAS-310-N-W1
		508	508	3.90	1.08	5.79	6.42	3.06	5.13	1.97	1.18		632.72				
127	5	35	35	120	28	180	184	92	152,4	50	30	5	379,2		M16	5/8-11 UNC	BAS-309-N-W1
		508	508	4.72	1.10	7.09	7.24	3.62	6.00	1.97	1.18		834.24				


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-N-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-N-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-N-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-N-U-W1**
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 NPT) **BAS-...-N20-W1**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



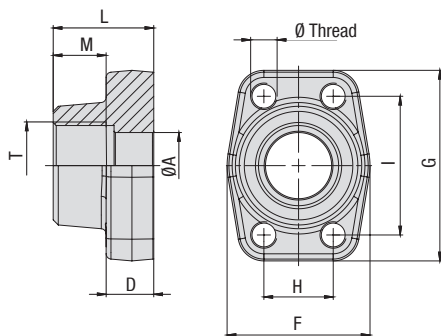

## SAE Single-Part Counterflange with Female NPT Thread Type BAS-N • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (NPT)		per 100		Metric	UNC	
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	15	1/2		28,7		M8	5/16-18 UNC	BAS-601-N-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.59			63.14				
13	1/2	350	420	13	16,5	47	57	18,2	40,5	36	20	3/8 (06)		30,7		M8	5/16-18 UNC	BAS-601-N06-W1
		5075	6090	.51	.65	1.85	2.24	.72	1.59	1.42	.79			67.54				
19	3/4	350	420	19	19,5	54	72	23,8	50,8	36	18	3/4		57,0		M10	3/8-16 UNC	BAS-602-N-W1
		5075	6090	.75	.77	2.13	2.83	.94	2.00	1.42	.71			125.40				
19	3/4	350	420	14	19,5	54	72	23,8	50,8	36	15	1/2 (08)		58,9		M10	3/8-16 UNC	BAS-602-N08-W1
		5075	6090	.55	.77	2.13	2.83	.94	2.00	1.42	.59			129.58				
25	1	350	420	25	24,5	68	82	27,8	57,2	44	20	1		83,4		M12	7/16-14 UNC	BAS-603-N-W1
		5075	6090	.98	.96	2.68	3.23	1.09	2.25	1.73	.79			183.48				
25	1	350	420	19	24,5	68	82	27,8	57,2	44	18	3/4 (12)		89,0		M12	7/16-14 UNC	BAS-603-N12-W1
		5075	6090	.75	.96	2.68	3.23	1.09	2.25	1.73	.71			195.80				
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4		120,3		M12	1/2-13 UNC	BAS-604-N-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87			264.66				
32	1-1/4	350	420	31	27,5	79	95	31,6	66,6	44	22	1-1/4 (20)		121,1		M14		BAS-604-N-M14-W1
		5075	6090	1.22	1.08	3.11	3.74	1.24	2.62	1.73	.87			266.42				
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1 (16)		118,0		M12	1/2-13 UNC	BAS-604-N16-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79			259.60				
32	1-1/4	350	420	25	27,5	79	95	31,6	66,6	44	20	1 (16)		125,6		M14		BAS-604-N16-M14-W1
		5075	6090	.98	1.08	3.11	3.74	1.24	2.62	1.73	.79			276.32				
38	1-1/2	350	420	38	31,0	88	108	36,5	79,3	51	24	1-1/2		200,9		M16	5/8-11 UNC	BAS-605-N-W1
		5075	6090	1.50	1.22	3.46	4.25	1.44	3.12	2.01	.94			441.98				
38	1-1/2	350	420	31	31,0	88	108	36,5	79,3	51	22	1-1/4 (20)		205,5		M16	5/8-11 UNC	BAS-605-N20-W1
		5075	6090	1.22	1.22	3.46	4.25	1.44	3.12	2.01	.87			452.10				
51	2	350	420	50	37,0	118	137	44,5	96,8	58	33	2		346,8		M20	3/4-10 UNC	BAS-606-N-W1
		5075	6090	1.97	1.46	4.65	5.39	1.75	3.81	2.28	1.30			762.96				

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-N-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-N-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-N-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-N-U-W1**
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 NPT) **BAS-...-N20-W1**





## SAE Single-Part Flange with Female UN/UNF Thread Type BFX-U • 3000 / 6000 PSI Series

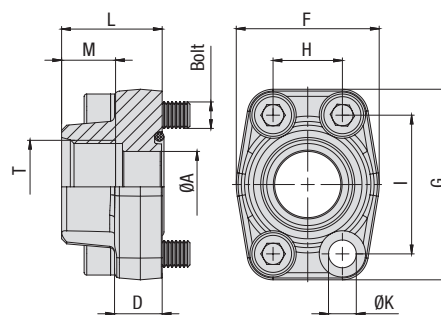

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (UN/UNF)	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	UNC	
13	1/2	350 5075	350 5075	13 .51	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	14,3 .56	3/4-16 (08)	8,7 .34	29,9 65.78	M8x30	5/16-18 UNC x 1-1/4	BFX-301-U08-W1
19	3/4	350 5075	350 5075	19 .75	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	16,7 .66	7/8-14 (10)	10,5 .41	38,1 83.82	M10x35	3/8-16 UNC x 1-1/2	BFX-302-U10-W1
19	3/4	350 5075	350 5075	19 .75	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	16,7 .66	1-1/16-12 (12)	10,5 .41	38,1 83.82	M10x35	3/8-16 UNC x 1-1/2	BFX-302-U12-W1
25	1	250 3625	315 4568	25 .98	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	19 .75	1-1/16-12 (12)	10,5 .41	50,9 111.98	M10x35	3/8-16 UNC x 1-1/2	BFX-303-U12-W1
25	1	250 3625	315 4568	25 .98	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	19 .75	1-5/16-12 (16)	10,5 .41	47,0 103.40	M10x35	3/8-16 UNC x 1-1/2	BFX-303-U16-W1
32	1-1/4	200 2900	250 3625	31 1.22	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	19 .75	1-5/16-12 (16)	11,5 (13,5) .45 (.53)	75,2 165.44	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-U16-W1
32	1-1/4	200 2900	250 3625	31 1.22	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	19 .75	1-5/8-12 (20)	11,5 (13,5) .45 (.53)	64,5 141.90	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-U20-W1
38	1-1/2	200 2900	200 2900	38 1.50	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	19 .75	1-5/8-12 (20)	13,5 (14,5) .53 (.57)	115,1 253.22	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-U20-W1
38	1-1/2	200 2900	200 2900	38 1.50	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	19 .75	1-7/8-12 (24)	13,5 (14,5) .53 (.57)	107,9 237.38	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-U24-W1

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions (mm/in)								Weight for Bolts ( <sup>kg</sup> /lbs) ca.				Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	M	T (UN/UNF)	ØK	per 100	Metric		UNC
13	1/2	350	400	13	16,5	47	57	18,2	40,5	36	14,3	3/4–16 (08)	8,7	29,9	M8x30	5/16–18 UNC x 1-1/4	BFX-601-U08-W1
		5075	5800	.51	.65	1.85	2.24	.72	1.59	1.42	.56		.34	65.78			
19	3/4	350	400	19	19,5	54	72	23,8	50,8	36	16,7	7/8–14 (10)	10,5	48,3	M10x35	3/8–16 UNC x 1-1/2	BFX-602-U10-W1
		5075	5800	.75	.77	2.13	2.83	.94	2.00	1.42	.66		.41	106.26			
19	3/4	350	400	19	19,5	54	72	23,8	50,8	36	16,7	1-1/16–12 (12)	10,5	48,3	M10x35	3/8–16 UNC x 1-1/2	BFX-602-U12-W1
		5075	5800	.75	.77	2.13	2.83	.94	2.00	1.42	.66		.41	106.26			
25	1	350	400	25	24,5	68	82	27,8	57,1	44	19	1-1/16–12 (12)	13	84,0	M12x45	7/16–14 UNC x 1-3/4	BFX-603-U12-W1 <sup>2</sup>
		5075	5800	.98	.96	2.68	3.23	1.09	2.25	1.73	.75		.51	184.80			
25	1	350	400	25	24,5	68	82	27,8	57,1	44	19	1-5/16–12 (16)	13	83,4	M12x45	7/16–14 UNC x 1-3/4	BFX-603-U16-W1 <sup>2</sup>
		5075	5800	.98	.96	2.68	3.23	1.09	2.25	1.73	.75		.51	183.48			
32	1-1/4	350	400	31	27,5	79	95	31,6	66,7	44	19	1-5/16–12 (16)	13,5	125,7	M12x45	1/2–13 UNC x 1-3/4	BFX-604-U16-W1
		5075	5800	1.22	1.08	3.11	3.74	1.24	2.63	1.73	.75		.53	276.54			
32	1-1/4	350	400	31	27,5	79	95	31,6	66,7	44	19	1-5/16–12 (16)	15	125,7	M14x45		BFX-604-U16-M14-W1
		5075	5800	1.22	1.08	3.11	3.74	1.24	2.63	1.73	.75		.59	276.54			
32	1-1/4	350	400	31	27,5	79	95	31,6	66,7	44	19	1-5/8–12 (20)	13,5	125,7	M12x45	1/2–13 UNC x 1-3/4	BFX-604-U20-W1
		5075	5800	1.22	1.08	3.11	3.74	1.24	2.63	1.73	.75		.53	276.54			
32	1-1/4	350	400	31	27,5	79	95	31,6	66,7	44	19	1-5/8–12 (20)	15	116,0	M14x45		BFX-604-U20-M14-W1
		5075	5800	1.22	1.08	3.11	3.74	1.24	2.63	1.73	.75		.59	255.20			
38	1-1/2	350	400	38	31	88	108	36,5	79,4	51	19	1-5/8–12 (20)	17	221,5	M16x55	5/8–11 UNC x 2-1/4	BFX-605-U20-W1
		5075	5800	1.50	1.22	3.46	4.25	1.44	3.13	2.01	.75		.67	487.30			
38	1-1/2	350	400	38	31	88	108	36,5	79,4	51	19	1-7/8–12 (24)	17	169,9	M16x55	5/8–11 UNC x 2-1/4	BFX-605-U24-W1
		5075	5800	1.50	1.22	3.46	4.25	1.44	3.13	2.01	.75		.67	373.78			

Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX-...-U\*\*-W1**  
**BFX-...-U\*\*-W5**

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-U\*\*-W46-K**  
**BFX-...-U\*\*-V-W46-K**  
**BFX-...-U\*\*-MH-W1-K**  
**BFX-...-U\*\*-U-W1-K**


Please always indicate Thread Size.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

<sup>3</sup> Alternative options shown in brackets are available on request.



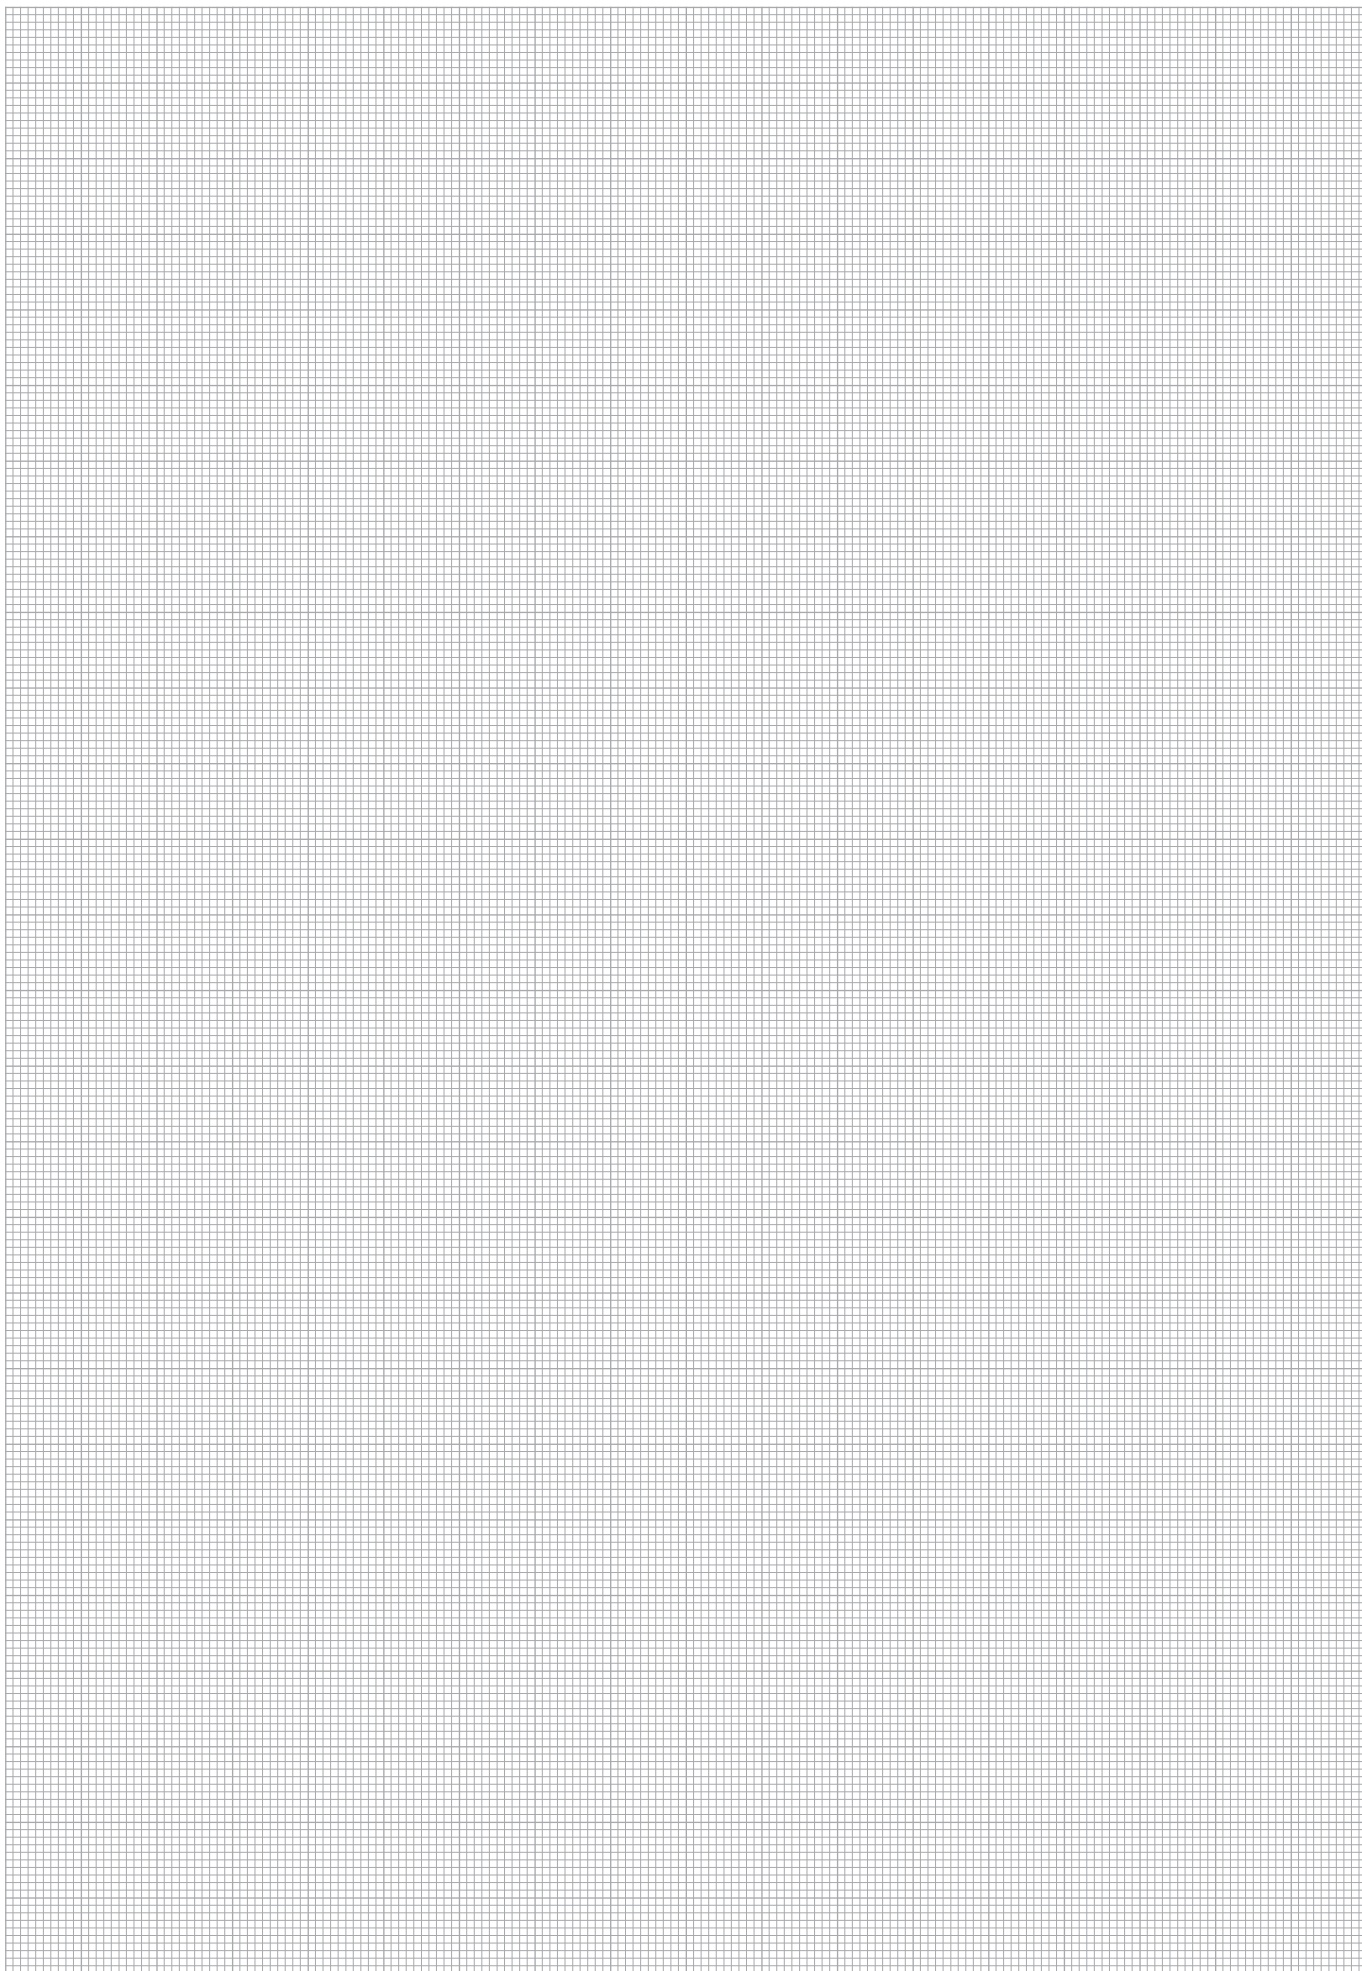

## SAE Single-Part Butt-Weld Flange for High Pressure Tubes (Schedule 80/160/XXS) Type BFX-ST ▪ 3000 PSI Series

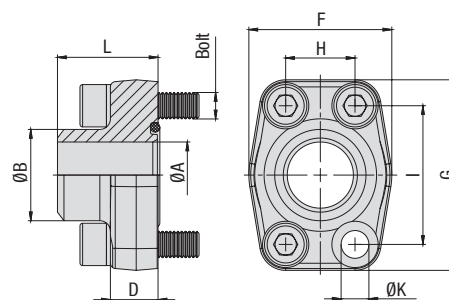

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	UNC		
13	1/2	350 5075	350 5075	13 .51	21,6 .85	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	8,7 .34	26,0 57.20	M8x30	5/16–18 UNC x 1-1/4	BFX-301-ST-21.6/13-W1	
13	1/2	350 5075	350 5075	13 .51	17,5 .69	16 .63	47 1.85	57 2.24	17,5 .69	38,1 1.50	36 1.42	8,7 .34	24,2 53.24	M8x30	5/16–18 UNC x 1-1/4	BFX-301-ST-17.5/13-W1	
19	3/4	350 5075	350 5075	19 .75	27,2 1.07	18 .71	50 1.97	67 2.64	22,3 .88	47,6 1.87	36 1.42	10,5 .41	35,2 77.44	M10x35	3/8–16 UNC x 1-1/2	BFX-302-ST-28/19-W1	
25	1	250 3625	315 4568	25 .98	34 1.34	18 .71	54 2.13	72 2.83	26,2 1.03	52,4 2.06	38 1.50	10,5 .41	40,8 89.76	M10x35	3/8–16 UNC x 1-1/2	BFX-303-ST-34/25-W1	
32	1-1/4	200 2900	250 3625	32 1.26	42,8 1.69	21 .83	68 2.68	82 3.23	30,2 1.19	58,7 2.31	41 1.61	11,5 (13,5) .45 (.53)	71,3 156.86	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-ST-42.8/32-W1	
38	1-1/2	200 2900	200 2900	38 1.50	48,6 1.91	25 .98	79 3.11	96 3.78	35,7 1.41	69,9 2.75	44 1.73	13,5 (14,5) .53 (.57)	97,3 214.06	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-ST-48.6/38-W1	
51	2	160 2320	200 2900	51 2.01	61 2.40	25,5 1.00	88 3.46	102 4.02	42,9 1.69	77,8 3.06	45 1.77	13,5 (14,5) .53 (.57)	115,1 253.22	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-ST-61/51-W1	
64	2-1/2	100 1450	160 2320	63 2.48	77 3.03	26 1.02	101 3.98	115 4.53	50,8 2.00	88,9 3.50	50 1.97	13,5 (14,5) .53 (.57)	153,2 337.04	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-ST-77/63-W1	
76	3	100 1450	160 2320	73 2.87	92 3.62	27,5 1.08	127 5.00	137 5.39	61,9 2.44	106,4 4.19	50 1.97	17 .67	229,0 503.80	M16x50	5/8–11 UNC x 2	BFX-308-ST-92/73-W1	
89	3-1/2	35 508	35 508	89 3.50	103 4.06	27,5 1.08	138 5.43	155 6.10	69,9 2.75	120,7 4.75	50 1.97	17 .67	259,1 570.02	M16x50	5/8–11 UNC x 2	BFX-309-ST-103/89-W1	
102	4	35 508	35 508	99 3.90	115,5 4.55	27,5 1.08	147 5.79	163 6.42	77,8 3.06	130,2 5.13	50 1.97	17 .67	286,5 630.30	M16x50	5/8–11 UNC x 2	BFX-310-ST-115.5/99-W1	
127	5	35 508	35 508	120 4.72	140,2 5.52	28 1.10	180 7.09	184 7.24	92 3.62	152,4 6.00	50 1.97	17 .67	398,6 876.92	M16x55	5/8–11 UNC x 2-1/4	BFX-311-ST-140.2/120-W1	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-ST-\*\*-\*\*-W1  
BFX-...-ST-\*\*-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-ST-\*\*-\*\*-W46-K  
BFX-...-ST-\*\*-\*\*-V-W46-K  
BFX-...-ST-\*\*-\*\*-MH-W1-K  
BFX-...-ST-\*\*-\*\*-U-W1-K


Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



## SAE Single-Part Butt-Weld Flange for High Pressure Tubes (Schedule 80/160/XXS) Type BFX-ST • 6000 PSI Series

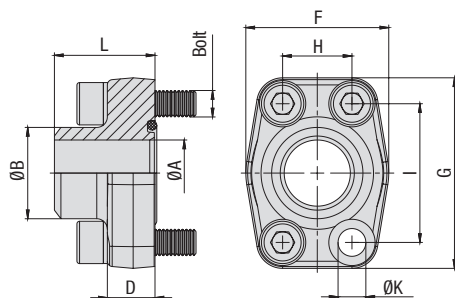

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight for Bolts ( <sup>kg</sup> / <sub>lbs</sub> ) ca.			Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	ØK	per 100	Metric	UNC		
13	1/2	350 5075	420 6090	13 .51	21,6 .85	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	8,7 .34	33,3 73.26	M8x30	5/16–18 UNC x 1-1/4	BFX-601-ST-21.6/13-W1	
13	1/2	350 5075	420 6090	13 .51	17,5 .69	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	8,7 .34	24,2 53.24	M8x30	5/16–18 UNC x 1-1/4	BFX-601-ST-17.5/13-W1	
19	3/4	350 5075	420 6090	19 .75	28 1.10	19,5 .77	54 2.13	72 2.83	23,8 .94	50,8 2.00	36 1.42	10,5 .41	49,4 108.68	M10x35	3/8–16 UNC x 1-1/2	BFX-602-ST-28/19-W1	
25	1	350 5075	420 6090	25 .98	34 1.34	24,5 .96	68 2.68	82 3.23	27,8 1.09	57,2 2.25	41 1.61	13 .51	64,1 141.02	M12x45	7/16–14 UNC x 1-3/4	BFX-603-ST-34/25-W1 <sup>2</sup>	
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	13,5 .53	101,3 222.86	M12x45	1/2–13 UNC x 1-3/4	BFX-604-ST-42.8/32-W1	
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	15 .59	98,1 215.82	M14x45		BFX-604-ST-42.8/32-M14-W1	
32	1-1/4	350 5075	420 6090	29 1.14	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	13,5 .53	112,8 248.16	M12x45	1/2–13 UNC x 1-3/4	BFX-604-ST-42.8/29-W1 (SCH 160)	
32	1-1/4	350 5075	420 6090	29 1.14	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	15 .59	100,8 221.76	M14x45		BFX-604-ST-42.8/29-M14-W1	
38	1-1/2	350 5075	420 6090	38 1.50	48,6 1.91	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	56 2.20	17 .67	168,2 370.04	M16x55	5/8–11 UNC x 2-1/4	BFX-605-ST-48.6/38-W1	
38	1-1/2	350 5075	420 6090	32 1.26	48,6 1.91	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	56 2.20	17 .67	170,9 375.98	M16x55	5/8–11 UNC x 2-1/4	BFX-605-ST-48.6/32-W1 (SCH 160)	
51	2	350 5075	420 6090	51 2.01	61 2.40	37 1.46	118 4.65	137 5.39	44,5 1.75	96,8 3.81	65 2.56	21 .83	284,5 625.90	M20x70	3/4–10 UNC x 2-3/4	BFX-606-ST-61/51-W1	
51	2	350 5075	420 6090	43 1.69	61 2.40	37 1.46	118 4.65	137 5.39	44,5 1.75	96,8 3.81	65 2.56	21 .83	316,4 696.08	M20x70	3/4–10 UNC x 2-3/4	BFX-606-ST-61/43-W1 (SCH 160)	
64	2-1/2	350 5075	420 6090	51 2.01	76,1 3.00	45 1.77	150 5.91	180 7.09	58,7 2.31	123,8 4.87	80 3.15	26 1.02	727,7 1600.94	M24x80		BFX-607-ST-76.1/51-W1	
64	2-1/2	350 5075	420 6090	60 2.36	90 3.54	45 1.77	152 5.98	180 7.09	58,7 2.31	123,8 4.87	80 3.15	26 1.02	730,0 1606.00	M24x80		BFX-607-ST-90/60-W1 (SCH XXS)	
76	3	350 5075	420 6090	90 3.54	67,7 2.67	55 2.17	178 7.00	208 8.19	71,4 2.81	152,4 6.00	90 3.54	33 1.30	1305,0 2871.00	M30x100		BFX-608-ST-90/67-W1 (SCH 160)	
76	3	350 5075	420 6090	90 3.54	58,4 2.30	55 2.17	178 7.00	208 8.19	71,4 2.81	152,4 6.00	90 3.54	33 1.30	1305,0 2871.00	M30x100		BFX-608-ST-90/58-W1 (SCH XXS)	

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-ST-\*\*-\*\*-W1  
BFX-...-ST-\*\*-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


BFX-...-ST-\*\*-\*\*-W46-K  
BFX-...-ST-\*\*-\*\*-V-W46-K  
BFX-...-ST-\*\*-\*\*-MH-W1-K  
BFX-...-ST-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.



## SAE Single-Part Butt-Weld Counterflange for High Pressure Tubes (Schedule 80/160/XXS)

### Type BAS-ST • 3000 PSI Series

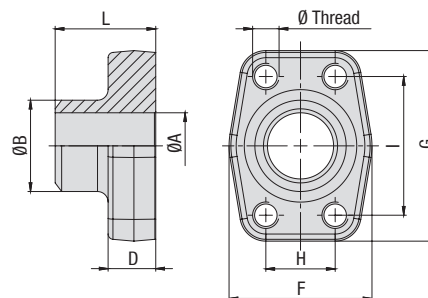

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L			Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	21,6	16	47	57	17,5	38,1	36	26,3		M8	5/16-18 UNC	BAS-301-ST-21.6/13-W1
		5075	5075	.51	.85	.63	1.85	2.24	.69	1.50	1.42	57.86				
13	1/2	350	350	13	17,5	16	47	57	17,5	38,1	36	25,8		M8	5/16-18 UNC	BAS-301-ST-17.5/13-W1
		5075	5075	.51	.69	.63	1.85	2.24	.69	1.50	1.42	56.76				
19	3/4	350	350	19	27,2	18	50	67	22,3	47,6	36	36,6		M10	3/8-16 UNC	BAS-302-ST-28/19-W1
		5075	5075	.75	1.07	.71	1.97	2.64	.88	1.87	1.42	80.52				
25	1	250	315	25	34	18	54	72	26,2	52,4	38	43,1		M10 (M12)	3/8-14 UNC	BAS-303-ST-34/25-W1
		3625	4568	.98	1.34	.71	2.13	2.83	1.03	2.06	1.50	94.82				
32	1-1/4	200	250	32	42,8	21	68	82	30,2	58,7	41	67,5		M10 (M12)	3/8-14 UNC	BAS-304-ST-42.8/32-W1
		2900	3625	1.26	1.69	.83	2.68	3.23	1.19	2.31	1.61	148.50				
38	1-1/2	200	200	38	48,6	25	79	96	35,7	69,9	44	103,4		M12 (M14)	1/2-13 UNC	BAS-305-ST-48.6/38-W1
		2900	2900	1.50	1.91	.98	3.11	3.78	1.41	2.75	1.73	227.48				
51	2	160	200	51	61	25,5	88	102	42,9	77,8	45	122,7		M12 (M14)	1/2-13 UNC	BAS-306-ST-61/51-W1
		2320	2900	2.01	2.40	1.00	3.46	4.02	1.69	3.06	1.77	269.94				
64	2-1/2	100	160	63	77	26	101	115	50,8	88,9	50	155,8		M12 (M14)	1/2-13 UNC	BAS-307-ST-77/63-W1
		1450	2320	2.48	3.03	1.02	3.98	4.53	2.00	3.50	1.97	342.76				
76	3	100	160	73	92	27,5	127	137	61,9	106,4	50	236,0		M16	5/8-11 UNC	BAS-308-ST-92/73-W1
		1450	2320	2.87	3.62	1.08	5.00	5.39	2.44	4.19	1.97	519.20				
89	3-1/2	35	35	89	103	27,5	138	155	69,9	120,7	50	267,3		M16	5/8-11 UNC	BAS-309-ST-103/89-W1
		508	508	3.50	4.06	1.08	5.43	6.10	2.75	4.75	1.97	588.06				
102	4	35	35	99	115,5	27,5	147	163	77,8	130,2	50	291,3		M16	5/8-11 UNC	BAS-310-ST-115.5/99-W1
		508	508	3.90	4.55	1.08	5.79	6.42	3.06	5.13	1.97	640.86				
127	5	35	35	120	140,2	28	180	184	92	152,4	50	416,1		M16	5/8-11 UNC	BAS-311-ST-140.2/120-W1
		508	508	4.72	5.52	1.10	7.09	7.24	3.62	6.00	1.97	915.42				

### Materials / Ordering Options / Examples

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes

**BAS-...-ST-\*\*-\*\*-W1**

\* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes

**BAS-...-ST-\*\*-\*\*-W5**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14)

**BAS-...-ST-\*\*-\*\*-M14-W1**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes

**BAS-...-ST-\*\*-\*\*-U-W1**

Please always indicate ØB / ØA.


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.





## SAE Single-Part Butt-Weld Counterflange for High Pressure Tubes (Schedule 80/160/XXS) Type BAS-ST • 6000 PSI Series

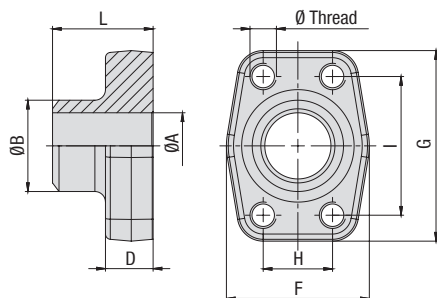

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) Ca. per 100	Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L		Metric	UNC	
13	1/2	350	420	13	21,6	16,5	47	57	18,2	40,5	36	27,8	M8	5/16-18 UNC	BAS-601-ST-21.6/13-W1
		5075	6090	.51	.85	.65	1.85	2.24	.72	1.59	1.42	61.16			
13	1/2	350	420	13	17,5	16,5	47	57	18,2	40,5	36	26,1	M8	5/16-18 UNC	BAS-601-ST-17.5/13-W1
		5075	6090	.51	.69	.65	1.85	2.24	.72	1.59	1.42	57.42			
19	3/4	350	420	19	28	19,5	54	72	23,8	50,8	36	49,0	M10	3/8-16 UNC	BAS-602-ST-28/19-W1
		5075	6090	.75	1.10	.77	2.13	2.83	.94	2.00	1.42	107.80			
25	1	350	420	25	34	24,5	68	82	27,8	57,2	41	67,5	M12	7/16-14 UNC	BAS-603-ST-34/25-W1
		5075	6090	.98	1.34	.96	2.68	3.23	1.09	2.25	1.61	148.50			
32	1-1/4	350	420	32	42,8	27,5	79	95	31,8	66,6	44	106,3	M12	1/2-13 UNC	BAS-604-ST-42.8/32-W1
		5075	6090	1.26	1.69	1.08	3.11	3.74	1.25	2.62	1.73	233.86			
32	1-1/4	350	420	32	42,8	27,5	79	95	31,8	66,6	44	103,2	M14		BAS-604-ST-42.8/32-M14-W1
		5075	6090	1.26	1.69	1.08	3.11	3.74	1.25	2.62	1.73	227.04			
32	1-1/4	350	420	29	42,8	27,5	79	95	31,8	66,6	44	101,0	M12	1/2-13 UNC	BAS-604-ST-42.8/29-W1 (SCH 160)
		5075	6090	1.14	1.69	1.08	3.11	3.74	1.25	2.62	1.73	222.20			
32	1-1/4	350	420	29	42,8	27,5	79	95	31,8	66,6	44	113,3	M14		BAS-604-ST-42.8/29-M14-W1
		5075	6090	1.14	1.69	1.08	3.11	3.74	1.25	2.62	1.73	249.26			
38	1-1/2	350	420	38	48,3	31	88	108	36,5	79,3	56	182,4	M16	5/8-11 UNC	BAS-605-ST-48.6/38-W1
		5075	6090	1.50	1.90	1.22	3.46	4.25	1.44	3.12	2.20	401.28			
38	1-1/2	350	420	32	48,3	31	88	108	36,5	79,3	56	180,0	M16	5/8-11 UNC	BAS-605-ST-48.6/32-W1 (SCH 160)
		5075	6090	1.26	1.90	1.22	3.46	4.25	1.44	3.12	2.20	396.00			
51	2	350	420	51	61	37	118	137	44,5	96,8	65	287,3	M20	3/4-10 UNC	BAS-606-ST-61/51-W1
		5075	6090	2.01	2.40	1.46	4.65	5.39	1.75	3.81	2.56	632.06			
51	2	350	420	43	61	37	118	137	44,5	96,8	65	326,6	M20	3/4-10 UNC	BAS-606-ST-61/43-W1 (SCH 160)
		5075	6090	1.69	2.40	1.46	4.65	5.39	1.75	3.81	2.56	718.52			
64	2-1/2	350	420	51	76,1	45	150	180	58,7	123,8	80	728,0	M24		BAS-606-ST-76.1/51-W1
		5075	6090	2.01	3.00	1.77	5.91	7.09	2.31	4.87	3.15	1601.60			
64	2-1/2	350	420	60,5	90	45	152	180	58,7	123,8	80	751,5	M24		BAS-607-ST-90/60.5-W1 (SCH XXS)
		5075	6090	2.38	3.54	1.77	5.98	7.09	2.31	4.87	3.15	1653.30			
76	3	350	420	67	90	55	178	208	71,4	152,4	90	1305,0	M30		BAS-608-ST-90/67-W1 (SCH 160)
		5075	6090	2.64	3.54	2.17	7.00	8.19	2.81	6.00	3.54	2871.00			
76	3	350	420	58	90	55	178	208	71,4	152,4	90	1305,0	M30		BAS-608-ST-90/58-W1 (SCH XXS)
		5075	6090	2.28	3.54	2.17	7.00	8.19	2.81	6.00	3.54	2871.00			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-ST-\*\*-\*\*-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-ST-\*\*-\*\*-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-ST-\*\*-\*\*-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-ST-\*\*-\*\*-U-W1**

Please always indicate ØB / ØA.



## SAE Single-Part Butt-Weld Flange for Low Pressure Tubes (Schedule 40) Type BFX-STRE ▪ 3000 PSI Series

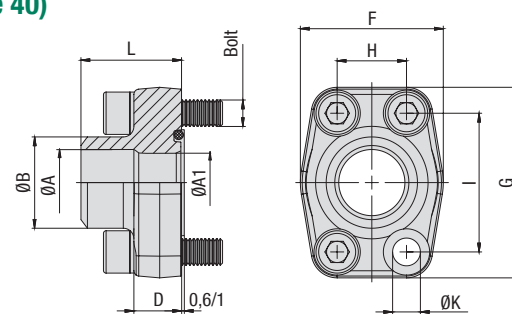

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sub>in</sub> )											Weight ( <sup>kg</sup> /lbs) ca. per 100	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L	ØK <sup>3</sup>	Metric <sup>3</sup>	UNC		
13	1/2	350	350	16	13	22	16	47	57	17,5	38,1	36	8,7	25,6	M8x30	5/16–18 UNC x 1-1/4	BFX-301-STRE-22/16-W1
		5075	5075	.63	.51	.87	.63	1.85	2.24	.69	1.50	1.42	.34	56.32			
19	3/4	350	350	21,5	19	28	18	50	67	22,3	47,6	36	10,5	34,0	M10x35	3/8–16 UNC x 1-1/2	BFX-302-STRE-28/21.5-W1
		5075	5075	.85	.75	1.10	.71	1.97	2.64	.88	1.87	1.42	.41	74.80			
25	1	250	315	27	25	35	18	54	72	26,2	52,4	38	10,5	40,0	M10x35	3/8–16 UNC x 1-1/2	BFX-303-STRE-35/27-W1
		3625	4568	1.06	.98	1.38	.71	2.13	2.83	1.03	2.06	1.50	.41	88.00			
32	1-1/4	200	250	36	31	43	21	68	82	30,2	58,7	41	11,5 (13,5)	61,7	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-STRE-43/36-W1
		2900	3625	1.42	1.22	1.69	.83	2.68	3.23	1.19	2.31	1.61	.45 (.53)	135.74			
38	1-1/2	200	200	42	38	49	25	79	96	35,7	69,9	44	13,5 (14,5)	92,8	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-STRE-49/42-W1
		2900	2900	1.65	1.50	1.93	.98	3.11	3.78	1.41	2.75	1.73	.53 (.57)	204.16			
51	2	160	200	42	42	49	25,5	88	102	42,9	77,8	45	13,5 (14,5)	116,4	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-STRE-49/42-W1
		2320	2900	1.65	1.65	1.93	1.00	3.46	4.02	1.69	3.06	1.77	.53 (.57)	256.08			
51	2	160	200	53	49	61	25,5	88	102	42,9	77,8	45	13,5 (14,5)	115,8	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-STRE-61/53-W1
		2320	2900	2.09	1.93	2.40	1.00	3.46	4.02	1.69	3.06	1.77	.53 (.57)	254.76			
64	2-1/2	100	160	53	53	61	26	101	115	50,8	88,9	50	13,5 (14,5)	148,3	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-STRE-61/53-W1
		1450	2320	2.09	2.09	2.40	1.02	3.98	4.53	2.00	3.50	1.97	.53 (.57)	326.26			
64	2-1/2	100	160	70	62	77	26	101	115	50,8	88,9	50	13,5 (14,5)	143,2	M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-STRE-77/70-W1
		1450	2320	2.76	2.44	3.03	1.02	3.98	4.53	2.00	3.50	1.97	.53 (.57)	315.04			
76	3	100	160	82	74	90	27,5	127	137	61,9	106,4	50	17	200,0	M16x50	5/8–11 UNC x 2	BFX-308-STRE-90/82-W1
		1450	2320	3.23	2.91	3.54	1.08	5.00	5.39	2.44	4.19	1.97	.67	440.00			
89	3-1/2	35	35	82	82	90	27,5	138	155	69,9	120,7	50	17	244,0	M16x50	5/8–11 UNC x 2	BFX-309-STRE-90/82-W1
		508	508	3.23	3.23	3.54	1.08	5.43	6.10	2.75	4.75	1.97	.67	536.80			
89	3-1/2	35	35	70	70	77	27,5	138	155	69,9	120,7	50	17	243,6	M16x50	5/8–11 UNC x 2	BFX-309-STRE-77/70-W1
		508	508	2.76	2.76	3.03	1.08	5.43	6.10	2.75	4.75	1.97	.67	535.92			
102	4	35	35	82	82	90	27,5	147	163	77,8	130,2	50	17	283,1	M16x50	5/8–11 UNC x 2	BFX-310-STRE-90/82-W1
		508	508	3.23	3.23	3.54	1.08	5.79	6.42	3.06	5.13	1.97	.67	622.82			
102	4	35	35	107	102	115	27,5	147	163	77,8	130,2	50	17	254,3	M16x50	5/8–11 UNC x 2	BFX-310-STRE-115/107-W1
		508	508	4.21	4.02	4.53	1.08	5.79	6.42	3.06	5.13	1.97	.67	559.46			
127	5	35	35	131	120	140,2	28	180	184	92	152,4	50	17	381,9	M16x55	5/8–11 UNC x 2-1/4	BFX-311-STRE-140/131-W1
		508	508	5.16	4.72	5.52	1.10	7.09	7.24	3.62	6.00	1.97	.67	840.18			

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX-...-STRE-\*\*-\*\*-W1**  
**BFX-...-STRE-\*\*-\*\*-W5**

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-STRE-\*\*-\*\*-W46-K**  
**BFX-...-STRE-\*\*-\*\*-V-W46-K**  
**BFX-...-STRE-\*\*-\*\*-MH-W1-K**  
**BFX-...-STRE-\*\*-\*\*-U-W1-K**


Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



## SAE Single-Part Butt-Weld Counterflange for Low Pressure Tubes (Schedule 40) Type BAS-STRE • 3000 PSI Series

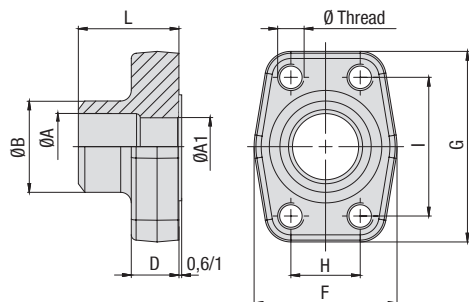

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sub>in</sub> )											Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca. per 100	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L	Metric <sup>3</sup>	UNC			
13	1/2	350	350	16	13	22	16	47	57	17,5	38,1	36	26,7	M8	5/16–18 UNC	BAS-301-STRE-22/16-W1	
		5075	5075	.63	.51	.87	.63	1.85	2.24	.69	1.50	1.42	58.74				
19	3/4	350	350	21,5	19	28	18	50	67	22,3	47,6	36	36,3	M10	3/8–16 UNC	BAS-302-STRE-28/21.5-W1	
		5075	5075	.85	.75	1.10	.71	1.97	2.64	.88	1.87	1.42	79.86				
25	1	250	315	27	25	35	18	54	72	26,2	52,4	38	43,1	M10	3/8–16 UNC	BAS-303-STRE-35/27-W1	
		3625	4568	1.06	.98	1.38	.71	2.13	2.83	1.03	2.06	1.50	94.82				
32	1-1/4	200	250	36	31	43	21	68	82	30,2	58,7	41	65,3	M10 (M12)	7/16–14 UNC	BAS-304-STRE-43/36-W1	
		2900	3625	1.42	1.22	1.69	.83	2.68	3.23	1.19	2.31	1.61	143.66				
38	1-1/2	200	200	42	38	49	25	79	96	35,7	69,9	44	97,1	M12 (M14)	1/2–13 UNC	BAS-305-STRE-49/42-W1	
		2900	2900	1.65	1.50	1.93	.98	3.11	3.78	1.41	2.75	1.73	213.62				
51	2	160	200	42	42	49	25,5	88	102	42,9	77,8	45	0,0	M12 (M14)	1/2–13 UNC	BAS-306-STRE-49/42-W1	
		2320	2900	1.65	1.65	1.93	1.00	3.46	4.02	1.69	3.06	1.77	.00				
51	2	160	200	53	49	61	25,5	88	102	42,9	77,8	45	119,7	M12 (M14)	1/2–13 UNC	BAS-306-STRE-61/53-W1	
		2320	2900	2.09	1.93	2.40	1.00	3.46	4.02	1.69	3.06	1.77	263.34				
64	2-1/2	100	160	53	53	61	26	101	115	50,8	88,9	50	150,1	M12 (M14)	1/2–13 UNC	BAS-307-STRE-61/53-W1	
		1450	2320	2.09	2.09	2.40	1.02	3.98	4.53	2.00	3.50	1.97	330.22				
64	2-1/2	100	160	70	62	77	26	101	115	50,8	88,9	50	149,2	M12 (M14)	1/2–13 UNC	BAS-307-STRE-77/70-W1	
		1450	2320	2.76	2.44	3.03	1.02	3.98	4.53	2.00	3.50	1.97	328.24				
76	3	100	160	82	74	90	27,5	127	137	61,9	106,4	50	211,7	M16	5/8–11 UNC	BAS-308-STRE-90/82-W1	
		1450	2320	3.23	2.91	3.54	1.08	5.00	5.39	2.44	4.19	1.97	465.74				
89	3-1/2	35	35	82	82	90	27,5	138	155	69,9	120,7	50	255,1	M16	5/8–11 UNC	BAS-309-STRE-90/82-W1	
		508	508	3.23	3.23	3.54	1.08	5.43	6.10	2.75	4.75	1.97	561.22				
89	3-1/2	35	35	70	70	77	27,5	138	155	69,9	120,7	50	268,9	M16	5/8–11 UNC	BAS-309-STRE-77/70-W1	
		508	508	2.76	2.76	3.03	1.08	5.43	6.10	2.75	4.75	1.97	591.67				
102	4	35	35	82	82	90	27,5	147	163	77,8	130,2	50	289,2	M16	5/8–11 UNC	BAS-310-STRE-90/82-W1	
		508	508	3.23	3.23	3.54	1.08	5.79	6.42	3.06	5.13	1.97	636.24				
102	4	35	35	107	102	115	27,5	147	163	77,8	130,2	50	257,4	M16	5/8–11 UNC	BAS-310-STRE-115/107-W1	
		508	508	4.21	4.02	4.53	1.08	5.79	6.42	3.06	5.13	1.97	566.28				
127	5	35	35	131	120	140,2	28	180	184	92	152,4	50	383,2	M16	5/8–11 UNC	BAS-311-STRE-140/131-W1	
		508	508	5.16	4.72	5.52	1.10	7.09	7.24	3.62	6.00	1.97	843.04				

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-STRE-\*\*-\*\*-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-STRE-\*\*-\*\*-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-STRE-\*\*-\*\*-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-STRE-\*\*-\*\*-U-W1**

Please always indicate ØB / ØA.



## SAE Single-Part Butt-Weld Flange for Metric Tubes Type BFX-SRE ▪ 3000 PSI Series

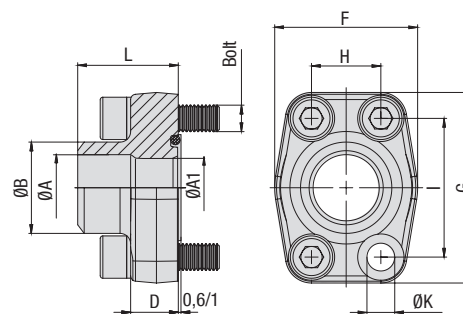

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)											Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L	ØK <sup>3</sup>		per 100		Metric <sup>3</sup>	UNC	
13	1/2	350	350	14	14	20	16	47	57	17,5	38,1	36	8,7	24,4			M8x30	5/16-18 UNC x 1-1/4	BFX-301-SRE-20/14-W1
		5075	5075	.55	.55	.79	.63	1.85	2.24	.69	1.50	1.42	.34	53.68					
13	1/2	350	350	16	13	22	16	47	57	17,5	38,1	36	8,7	24,9			M8x30	5/16-18 UNC x 1-1/4	BFX-301-SRE-22/16-W1
		5075	5075	.63	.51	.87	.63	1.85	2.24	.69	1.50	1.42	.34	54.78					
19	3/4	350	350	19	19	25	18	50	67	22,3	47,6	36	10,5	32,4			M10x35	3/8-16 UNC x 1-1/2	BFX-302-SRE-25/19-W1
		5075	5075	.75	.75	.98	.71	1.97	2.64	.88	1.87	1.42	.41	71.28					
19	3/4	350	350	21,5	19	28	18	50	67	22,3	47,6	36	10,5	33,9			M10x35	3/8-16 UNC x 1-1/2	BFX-302-SRE-28/21.5-W1
		5075	5075	.85	.75	1.10	.71	1.97	2.64	.88	1.87	1.42	.41	74.58					
25	1	250	315	22	22	30	18	54	72	26,2	52,4	38	10,5	41,0			M10x35	3/8-16 UNC x 1-1/2	BFX-303-SRE-30/22-W1
		3625	4568	.87	.87	1.18	.71	2.13	2.83	1.03	2.06	1.50	.41	90.20					
25	1	250	315	27	25	35	18	54	72	26,2	52,4	38	10,5	40,6			M10x35	3/8-16 UNC x 1-1/2	BFX-303-SRE-35/27-W1
		3625	4568	1.06	.98	1.38	.71	2.13	2.83	1.03	2.06	1.50	.41	89.32					
32	1-1/4	200	250	30	30	38	21	68	82	30,2	58,7	41	11,5 (13,5)	60,6			M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-SRE-38/30-W1
		2900	3625	1.18	1.18	1.50	.83	2.68	3.23	1.19	2.31	1.61	.45 (.53)	133.32					
32	1-1/4	200	250	36	31	43	21	68	82	30,2	58,7	41	11,5 (13,5)	61,7			M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-SRE-43/36-W1
		2900	3625	1.42	1.22	1.69	.83	2.68	3.23	1.19	2.31	1.61	.45 (.53)	135.74					
38	1-1/2	200	200	30	30	38	25	79	96	35,7	69,9	44	13,5 (14,5)	97,4			M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-SRE-38/30-W1
		2900	2900	1.18	1.18	1.50	.98	3.11	3.78	1.41	2.75	1.73	.53 (.57)	214.28					
38	1-1/2	200	200	36	36	42	25	79	96	35,7	69,9	44	13,5 (14,5)	91,3			M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-SRE-42/36-W1
		2900	2900	1.42	1.42	1.65	.98	3.11	3.78	1.41	2.75	1.73	.53 (.57)	200.86					
38	1-1/2	200	200	38	38	49	25	79	96	35,7	69,9	44	13,5 (14,5)	95,8			M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-SRE-49/38-W1
		2900	2900	1.50	1.50	1.93	.98	3.11	3.78	1.41	2.75	1.73	.53 (.57)	210.76					
51	2	160	200	49	49	61	25,5	88	102	42,9	77,8	45	13,5 (14,5)	118,4			M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-306-SRE-61/49-W1
		2320	2900	1.93	1.93	2.40	1.00	3.46	4.02	1.69	3.06	1.77	.53 (.57)	260.48					
64	2-1/2	100	160	62	62	77	26	101	115	50,8	88,9	50	13,5 (14,5)	152,1			M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-307-SRE-77/62-W1
		1450	2320	2.44	2.44	3.03	1.02	3.98	4.53	2.00	3.50	1.97	.53 (.57)	334.62					
76	3	100	160	62	62	77	27,5	127	137	61,9	106,4	50	17	229,3			M16x50	5/8-11 UNC x 2	BFX-308-SRE-77/62-W1
		1450	2320	2.44	2.44	3.03	1.08	5.00	5.39	2.44	4.19	1.97	.67	504.46					

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-SRE-\*\*-\*\*/-W1  
BFX-...-SRE-\*\*-\*\*/-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


BFX-...-SRE-\*\*-\*\*/-W46-K  
BFX-...-SRE-\*\*-\*\*/-V-W46-K  
BFX-...-SRE-\*\*-\*\*/-MH-W1-K  
BFX-...-SRE-\*\*-\*\*/-U-W1-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



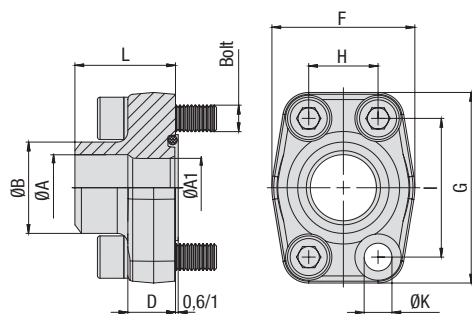

## SAE Single-Part Butt-Weld Flange for Metric Tubes Type BFX-SRE • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)												Weight (kg/lbs) Ca. per 100		for Bolts		Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L	ØK					Metric	UNC		
13	1/2	350	420	14	14	20	16,5	47	57	18,2	40,5	36	8,7	24,0				M8x30	5/16-18 UNC x 1-1/4	BFX-601-SRE-20/14-W1	
		5075	6090	.55	.55	.79	.65	1.85	2.24	.72	1.59	1.42	.34	52.80							
19	3/4	350	420	14	14	20	19,5	54	72	23,8	50,8	36	10,5	48,7				M10x35	3/8-16 UNC x 1-1/2	BFX-602-SRE-20/14-W1	
		5075	6090	.55	.55	.79	.77	2.13	2.83	.94	2.00	1.42	.41	107.14							
19	3/4	350	420	17	17	25	19,5	54	72	23,8	50,8	36	10,5	48,8				M10x35	3/8-16 UNC x 1-1/2	BFX-602-SRE-25/17-W1	
		5075	6090	.67	.67	.98	.77	2.13	2.83	.94	2.00	1.42	.41	107.36							
25	1	350	420	17	17	25	24,5	68	82	27,8	57,2	44	13	72,7				M12x45	7/16-14 UNC x 1-3/4	BFX-603-SRE-25/17-W1 <sup>2</sup>	
		5075	6090	.67	.67	.98	.96	2.68	3.23	1.09	2.25	1.73	.51	159.94							
25	1	350	420	22	22	30	24,5	68	82	27,8	57,2	44	13	72,1				M12x45	7/16-14 UNC x 1-3/4	BFX-603-SRE-30/22-W1 <sup>2</sup>	
		5075	6090	.87	.87	1.18	.96	2.68	3.23	1.09	2.25	1.73	.51	158.62							
32	1-1/4	350	420	22	22	30	27,5	79	95	31,6	66,6	44	13,5	155,7				M12x45	1/2-13 UNC x 1-3/4	BFX-604-SRE-30/22-W1	
		5075	6090	.87	.87	1.18	1.08	3.11	3.74	1.24	2.62	1.73	.53	342.54							
32	1-1/4	350	420	22	22	30	27,5	79	95	31,6	66,6	44	15	102,8				M14x45		BFX-604-SRE-30/22-M14-W1	
		5075	6090	.87	.87	1.18	1.08	3.11	3.74	1.24	2.62	1.73	.59	226.16							
32	1-1/4	350	420	26	26	38	27,5	79	95	31,6	66,6	44	13,5	109,4				M12x45	1/2-13 UNC x 1-3/4	BFX-604-SRE-38/26-W1	
		5075	6090	1.02	1.02	1.50	1.08	3.11	3.74	1.24	2.62	1.73	.53	240.68							
32	1-1/4	350	420	26	26	38	27,5	79	95	31,6	66,6	44	15	105,0				M14x45		BFX-604-SRE-38/26-M14-W1	
		5075	6090	1.02	1.02	1.50	1.08	3.11	3.74	1.24	2.62	1.73	.59	231.00							
38	1-1/2	350	420	26	26	38	28	88	108	36,5	79,3	56	17	171,6				M16x55	5/8-11 UNC x 2-1/4	BFX-605-SRE-38/26-W1	
		5075	6090	1.02	1.02	1.50	1.10	3.46	4.25	1.44	3.12	2.20	.67	377.52							
38	1-1/2	350	420	32	32	49	28	88	108	36,5	79,3	56	17	173,7				M16x55	5/8-11 UNC x 2-1/4	BFX-605-SRE-49/32-W1	
		5075	6090	1.26	1.26	1.93	1.10	3.46	4.25	1.44	3.12	2.20	.67	382.14							
38	1-1/2	350	420	40	40	61	28	88	108	36,5	79,3	56	17	180,8				M16x55	5/8-11 UNC x 2-1/4	BFX-605-SRE-61/40-W1	
		5075	6090	1.57	1.57	2.40	1.10	3.46	4.25	1.44	3.12	2.20	.67	397.76							
51	2	350	420	40	40	61	37	118	137	44,5	96,8	65	21	317,3				M20x70	3/4-10 UNC x 2-3/4	BFX-606-SRE-61/40-W1	
		5075	6090	1.57	1.57	2.40	1.46	4.65	5.39	1.75	3.81	2.56	.83	698.06							
51	2	350	420	50	48	76	28	118	137	44,5	96,8	80	21	308,2				M20x55	3/4-10 UNC x 2-1/4	BFX-606-SRE-76/50-W1	
		5075	6090	1.97	1.89	2.99	1.10	4.65	5.39	1.75	3.81	3.15	.83	678.04							

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-SRE-\*\*-\*\*-W1  
BFX-...-SRE-\*\*-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


BFX-...-SRE-\*\*-\*\*-W46-K  
BFX-...-SRE-\*\*-\*\*-V-W46-K  
BFX-...-SRE-\*\*-\*\*-MH-W1-K  
BFX-...-SRE-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.





## SAE Single-Part Butt-Weld Counterflange for Metric Tubes Type BAS-SRE • 3000 PSI Series

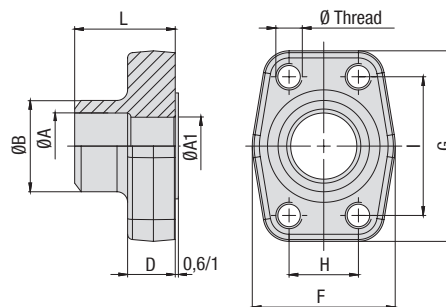

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)												Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L				per 100		Metric <sup>3</sup>	UNC	
13	1/2	350	350	14	14	20	16	47	57	17,5	38,1	36	26,1					M8	5/16-18 UNC	BAS-301-SRE-20/14-W1
		5075	5075	.55	.55	.79	.63	1.85	2.24	.69	1.50	1.42	57.42							
13	1/2	350	350	16	13	22	16	47	57	17,5	38,1	36	26,7					M8	5/16-18 UNC	BAS-301-SRE-22/16-W1
		5075	5075	.63	.51	.87	.63	1.85	2.24	.69	1.50	1.42	58.74							
19	3/4	350	350	19	19	25	18	50	67	22,3	47,6	36	34,5					M10	3/8-16 UNC	BAS-302-SRE-25/19-W1
		5075	5075	.75	.75	.98	.71	1.97	2.64	.88	1.87	1.42	75.90							
19	3/4	350	350	21,5	19	28	18	50	67	22,3	47,6	36	35,9					M10	3/8-16 UNC	BAS-302-SRE-28/21.5-W1
		5075	5075	.85	.75	1.10	.71	1.97	2.64	.88	1.87	1.42	78.98							
25	1	250	315	22	22	30	18	54	72	26,2	52,4	38	43,6					M10	3/8-16 UNC	BAS-303-SRE-30/22-W1
		3625	4568	.87	.87	1.18	.71	2.13	2.83	1.03	2.06	1.50	95.92							
25	1	250	315	27	25	35	18	54	72	26,2	52,4	38	42,9					M10	3/8-16 UNC	BAS-303-SRE-35/27-W1
		3625	4568	1.06	.98	1.38	.71	2.13	2.83	1.03	2.06	1.50	94.38							
32	1-1/4	200	250	30	30	38	21	68	82	30,2	58,7	41	63,9					M10 (M12)	7/16-14 UNC	BAS-304-SRE-38/30-W1
		2900	3625	1.18	1.18	1.50	.83	2.68	3.23	1.19	2.31	1.61	140.58							
32	1-1/4	200	250	36	31	43	21	68	82	30,2	58,7	41	64,6					M10 (M12)	7/16-14 UNC	BAS-304-SRE-43/36-W1
		2900	3625	1.42	1.22	1.69	.83	2.68	3.23	1.19	2.31	1.61	142.12							
38	1-1/2	200	200	30	30	38	25	79	96	35,7	69,9	44	101,9					M12 (M14)	1/2-13 UNC	BAS-305-SRE-38/30-W1
		2900	2900	1.18	1.18	1.50	.98	3.11	3.78	1.41	2.75	1.73	224.18							
38	1-1/2	200	200	36	36	42	25	79	96	35,7	69,9	44	95,0					M12 (M14)	1/2-13 UNC	BAS-305-SRE-42/36-W1
		2900	2900	1.42	1.42	1.65	.98	3.11	3.78	1.41	2.75	1.73	209.00							
38	1-1/2	200	200	38	38	49	25	79	96	35,7	69,9	44	101,6					M12 (M14)	1/2-13 UNC	BAS-305-SRE-49/38-W1
		2900	2900	1.50	1.50	1.93	.98	3.11	3.78	1.41	2.75	1.73	223.52							
51	2	160	200	49	49	61	25,5	88	102	42,9	77,8	45	123,2					M12 (M14)	1/2-13 UNC	BAS-306-SRE-61/49-W1
		2320	2900	1.93	1.93	2.40	1.00	3.46	4.02	1.69	3.06	1.77	271.04							
64	2-1/2	100	160	62	62	77	26	101	115	50,8	88,9	50	159,6					M12 (M14)	1/2-13 UNC	BAS-307-SRE-77/62-W1
		1450	2320	2.44	2.44	3.03	1.02	3.98	4.53	2.00	3.50	1.97	351.12							
76	3	100	160	62	62	77	27,5	127	137	61,9	106,4	50	235,3					M16	5/8-11 UNC	BAS-308-SRE-77/62-W1
		1450	2320	2.44	2.44	3.03	1.08	5.00	5.39	2.44	4.19	1.97	517.66							

### Materials / Ordering Options / Examples

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with Metric tapped holes

**BAS-...-SRE-\*\*-\*\*-W1**

\* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request)  
with Metric tapped holes

**BAS-...-SRE-\*\*-\*\*-W5**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with size of Metric tapped holes deviating from the standard (e.g. M14)

**BAS-...-SRE-\*\*-\*\*-M14-W1**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with UNC tapped holes


**BAS-...-SRE-\*\*-\*\*-U-W1**

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



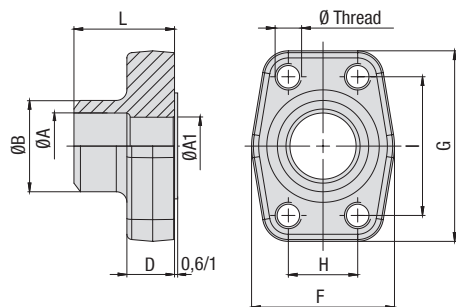

## SAE Single-Part Butt-Weld Counterflange for Metric Tubes Type BAS-SRE • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	L		per 100		Metric	UNC	
13	1/2	350	420	14	14	20	16,5	47	57	18,2	40,5	36	25,6			M8	5/16-18 UNC	BAS-601-SRE-20/14-W1
		5075	6090	.55	.55	.79	.65	1.85	2.24	.72	1.59	1.42	56.32					
19	3/4	350	420	14	14	20	19,5	54	72	23,8	50,8	36	51,7			M10	3/8-16 UNC	BAS-602-SRE-20/14-W1
		5075	6090	.55	.55	.79	.77	2.13	2.83	.94	2.00	1.42	113.74					
19	3/4	350	420	17	17	25	19,5	54	72	23,8	50,8	36	51,3			M10	3/8-16 UNC	BAS-602-SRE-25/17-W1
		5075	6090	.67	.67	.98	.77	2.13	2.83	.94	2.00	1.42	112.86					
25	1	350	420	17	17	25	24,5	68	82	27,8	57,2	44	76,5			M12	7/16-14 UNC	BAS-603-SRE-25/17-W1
		5075	6090	.67	.67	.98	.96	2.68	3.23	1.09	2.25	1.73	168.30					
25	1	350	420	22	22	30	24,5	68	82	27,8	57,2	44	75,7			M12	7/16-14 UNC	BAS-603-SRE-30/22-W1
		5075	6090	.87	.87	1.18	.96	2.68	3.23	1.09	2.25	1.73	166.54					
32	1-1/4	350	420	22	22	30	27,5	79	95	31,6	66,6	44	103,0			M12	1/2-13 UNC	BAS-604-SRE-30/22-W1
		5075	6090	.87	.87	1.18	1.08	3.11	3.74	1.24	2.62	1.73	226.60					
32	1-1/4	350	420	22	22	30	27,5	79	95	31,6	66,6	44	106,8			M14		BAS-604-SRE-30/22-M14-W1
		5075	6090	.87	.87	1.18	1.08	3.11	3.74	1.24	2.62	1.73	234.96					
32	1-1/4	350	420	26	26	38	27,5	79	95	31,6	66,6	44	105,0			M12	1/2-13 UNC	BAS-604-SRE-38/26-W1
		5075	6090	1.02	1.02	1.50	1.08	3.11	3.74	1.24	2.62	1.73	231.00					
32	1-1/4	350	420	26	26	38	27,5	79	95	31,6	66,6	44	110,2			M14		BAS-604-SRE-38/26-M14-W1
		5075	6090	1.02	1.02	1.50	1.08	3.11	3.74	1.24	2.62	1.73	242.44					
38	1-1/2	350	420	26	26	38	28	88	108	36,5	79,3	56	177,3			M16	5/8-11 UNC	BAS-605-SRE-38/26-W1
		5075	6090	1.02	1.02	1.50	1.10	3.46	4.25	1.44	3.12	2.20	390.06					
38	1-1/2	350	420	32	32	49	28	88	108	36,5	79,3	56	180,4			M16	5/8-11 UNC	BAS-605-SRE-49/32-W1
		5075	6090	1.26	1.26	1.93	1.10	3.46	4.25	1.44	3.12	2.20	396.88					
38	1-1/2	350	420	40	40	61	28	88	108	36,5	79,3	56	185,5			M16	5/8-11 UNC	BAS-605-SRE-61/40-W1
		5075	6090	1.57	1.57	2.40	1.10	3.46	4.25	1.44	3.12	2.20	408.10					
51	2	350	420	40	40	61	37	118	137	44,5	96,8	70	352,8			M20	3/4-10 UNC	BAS-606-SRE-61/40-W1
		5075	6090	1.57	1.57	2.40	1.46	4.65	5.39	1.75	3.81	2.76	776.16					
51	2	350	420	50	48	76	28	118	137	44,5	96,8	80	105,0			M20	3/4-10 UNC	BAS-606-SRE-76/50-W1
		5075	6090	1.97	1.89	2.99	1.10	4.65	5.39	1.75	3.81	3.15	231.00					

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-SRE-\*\*-\*\*-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-SRE-\*\*-\*\*-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-SRE-\*\*-\*\*-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-SRE-\*\*-\*\*-U-W1**

Please always indicate ØB / ØA.



## SAE Single-Part Socket-Weld Flange Type BFX-ES ▪ 3000 PSI Series

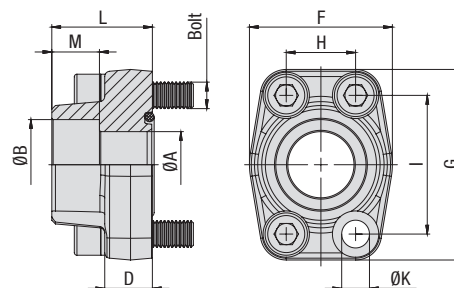

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)												Weight (kg/lbs) ca.	for Bolts	Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	M	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	21,6	16	47	57	17,5	38,1	36	18	8,7	27,7	M8x30	5/16-18 UNC x 1-1/4	BFX-301-ES-21.6/13-W1
		5075	5075	.51	.85	.63	1.85	2.24	.69	1.50	1.42	.71	.34	60.94			
13	1/2	350	350	13	17,5	16	47	57	17,5	38,1	36	18	8,7	28,6	M8x30	5/16-18 UNC x 1-1/4	BFX-301-ES-17.5/13-W1
		5075	5075	.51	.69	.63	1.85	2.24	.69	1.50	1.42	.71	.34	62.92			
13	1/2	350	350	13	20,3	16	47	57	17,5	38,1	36	18	8,7	28,8	M8x30	5/16-18 UNC x 1-1/4	BFX-301-ES-20.3/13-W1
		5075	5075	.51	.80	.63	1.85	2.24	.69	1.50	1.42	.71	.34	63.36			
19	3/4	350	350	19	27,2	18	50	67	22,3	47,6	36	18	10,5	37,7	M10x35	3/8-16 UNC x 1-1/2	BFX-302-ES-27.2/19-W1
		5075	5075	.75	1.07	.71	1.97	2.64	.88	1.87	1.42	.71	.41	82.94			
19	3/4	350	350	19	25,3	18	50	67	22,3	47,6	36	18	10,5	39,7	M10x35	3/8-16 UNC x 1-1/2	BFX-302-ES-25.3/19-W1
		5075	5075	.75	1.00	.71	1.97	2.64	.88	1.87	1.42	.71	.41	87.34			
25	1	250	315	25	34	18	54	72	26,2	52,4	38	18	10,5	44,8	M10x35	3/8-16 UNC x 1-1/2	BFX-303-ES-34/25-W1
		3625	4568	.98	1.34	.71	2.13	2.83	1.03	2.06	1.50	.71	.41	98.56			
25	1	250	315	25	30,3	18	54	72	26,2	52,4	38	18	10,5	47,3	M10x35	3/8-16 UNC x 1-1/2	BFX-303-ES-30.3/25-W1
		3625	4568	.98	1.19	.71	2.13	2.83	1.03	2.06	1.50	.71	.41	104.06			
32	1-1/4	200	250	32	42,8	21	68	82	30,2	58,7	41	20	11,5 (12,5)	64,3	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-ES-42.8/32-W1
		2900	3625	1.26	1.69	.83	2.68	3.23	1.19	2.31	1.61	.79	.45 (.49)	141.46			
32	1-1/4	200	250	32	38,3	21	68	82	30,2	58,7	41	20	11,5 (12,5)	72,0	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX-304-ES-38.3/32-W1
		2900	3625	1.26	1.51	.83	2.68	3.23	1.19	2.31	1.61	.79	.45 (.49)	158.40			
38	1-1/2	200	200	38	48,6	25	79	96	35,7	69,9	44	22	13,5 (14,5)	109,4	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-ES-48.6/38-W1
		2900	2900	1.50	1.91	.98	3.11	3.78	1.41	2.75	1.73	.87	.53 (.57)	240.68			
38	1-1/2	200	200	38	50,5	25	79	96	35,7	69,9	44	22	13,5 (14,5)	101,1	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-305-ES-50.5/38-W1
		2900	2900	1.50	1.99	.98	3.11	3.78	1.41	2.75	1.73	.87	.53 (.57)	222.42			
51	2	160	200	51	61	25,5	88	102	42,9	77,8	45	24	13,5 (14,5)	125,7	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-306-ES-61/51-W1
		2320	2900	2.01	2.40	1.00	3.46	4.02	1.69	3.06	1.77	.94	.53	276.54			
64	2-1/2	100	160	63	76,6	26	101	115	50,8	88,9	50	28	13,5 (14,5)	145,3	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX-307-ES-76.6/63-W1
		1450	2320	2.48	3.02	1.02	3.98	4.53	2.00	3.50	1.97	1.10	.53 (.57)	319.66			
76	3	100	100	73	90,5	27,5	127	137	61,9	106,4	50	28	17	212,7	M16x50	5/8-11 UNC x 2	BFX-308-ES-90.5/73-W1
		1450	1450	2.87	3.56	1.08	5.00	5.39	2.44	4.19	1.97	1.10	.67	467.94			
89	3-1/2	35	35	89	103	27,5	138	155	69,9	120,7	50	30	17	235,2	M16x50	5/8-11 UNC x 2	BFX-309-ES-103/89-W1
		508	508	3.50	4.06	1.08	5.43	6.10	2.75	4.75	1.97	1.18	.67	517.44			
102	4	35	35	99	115,5	27,5	147	163	77,8	130,2	50	30	17	282,8	M16x50	5/8-11 UNC x 2	BFX-310-ES-115.5/99-W1
		508	508	3.90	4.55	1.08	5.79	6.42	3.06	5.13	1.97	1.18	.67	622.16			
127	5	35	35	120	142	28	180	184	92,1	152,4	50	30	17	360,5	M16x55	5/8-11 UNC x 2-1/4	BFX-311-ES-142/120-W1
		508	508	4.72	5.59	1.10	7.09	7.24	3.63	6.00	1.97	1.18	.67	793.10			

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-ES-\*\*-W1  
BFX-...-ES-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-ES-\*\*-W46-K  
BFX-...-ES-\*\*-V-W46-K  
BFX-...-ES-\*\*-MH-W1-K  
BFX-...-ES-\*\*-U-W1-K


Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



## SAE Single-Part Socket-Weld Flange Type BFX-ES • 6000 PSI Series

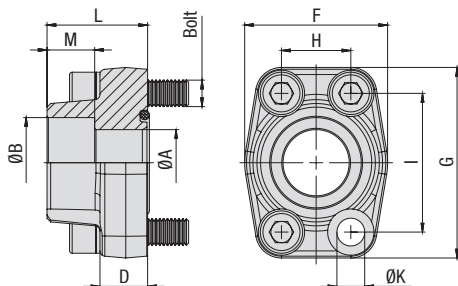

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> /in)											Weight ( <sup>kg</sup> /lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	M	ØK	per 100	Metric	UNC			
13	1/2	350 5075	420 6090	13 .51	21,6 .85	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	18 .71	8,7 .34	28,0 61.60	M8x30	5/16–18 UNC x 1-1/4	BFX-601-ES-21.6/13-W1		
13	1/2	350 5075	420 6090	13 .51	17,5 .69	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	18 .71	8,7 .34	28,8 63.36	M8x30	5/16–18 UNC x 1-1/4	BFX-601-ES-17.5/13-W1		
13	1/2	350 5075	420 6090	13 .51	20,3 .80	16,5 .65	47 1.85	57 2.24	18,2 .72	40,5 1.59	36 1.42	18 .71	8,7 .34	27,3 60.06	M8x30	5/16–18 UNC x 1-1/4	BFX-601-ES-20.3/13-W1		
19	3/4	350 5075	420 6090	19 .75	27,2 1.07	19,5 .77	54 2.13	72 2.83	23,8 .94	50,8 2.00	36 1.42	20 .79	10,5 .41	51,9 114.18	M10x35	3/8–16 UNC x 1-1/2	BFX-602-ES-27.2/19-W1		
19	3/4	350 5075	420 6090	19 .75	25,3 1.00	19,5 .77	54 2.13	72 2.83	23,8 .94	50,8 2.00	36 1.42	20 .79	10,5 .41	53,8 118.36	M10x35	3/8–16 UNC x 1-1/2	BFX-602-ES-25.3/19-W1		
25	1	350 5075	420 6090	25 .98	34 1.34	24,5 .96	68 2.68	82 3.23	27,8 1.09	57,2 2.25	44 1.73	22 .87	13 .51	73,8 162.36	M12x45	7/16–14 UNC x 1-3/4	BFX-603-ES-34/25-W1 <sup>2</sup>		
25	1	350 5075	420 6090	25 .98	30,3 1.19	24,5 .96	68 2.68	82 3.23	27,8 1.09	57,2 2.25	44 1.73	22 .87	13 .51	81,0 178.20	M12x45	7/16–14 UNC x 1-3/4	BFX-603-ES-30.3/25-W1 <sup>2</sup>		
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	22 .87	13,5 .53	115,7 254.54	M12x45	1/2–13 UNC x 1-3/4	BFX-604-ES-42.8/32-W1		
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	22 .87	15 .59	110,3 242.66	M14x45		BFX-604-ES-42.8/32-M14-W1		
32	1-1/4	350 5075	420 6090	32 1.26	38,3 1.51	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	22 .87	13,5 .53	118,3 260.26	M12x45	1/2–13 UNC x 1-3/4	BFX-604-ES-38.3/32-W1		
32	1-1/4	350 5075	420 6090	32 1.26	38,3 1.51	27,5 1.08	79 3.11	95 3.74	31,8 1.25	66,6 2.62	44 1.73	22 .87	15 .59	125,6 276.32	M14x45		BFX-604-ES-38.3/32-M14-W1		
38	1-1/2	350 5075	420 6090	38 1.50	48,6 1.91	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	51 2.01	24 .94	17 .67	183,5 403.70	M16x55	5/8–11 UNC x 2-1/4	BFX-605-ES-48.6/38-W1		
38	1-1/2	350 5075	420 6090	38 1.50	50,5 1.99	31 1.22	88 3.46	108 4.25	36,5 1.44	79,3 3.12	51 2.01	24 .94	17 .67	184,7 406.34	M16x55	5/8–11 UNC x 2-1/4	BFX-605-ES-50.5/38-W1		
51	2	350 5075	420 6090	51 2.01	61 2.40	37 1.46	118 4.65	137 5.39	44,5 1.75	96,8 3.81	65 2.56	24 .94	21 .83	329,2 724.24	M20x70	3/4–10 UNC x 2-3/4	BFX-606-ES-61/51-W1		
64	2-1/2	350 5075	420 6090	63 2.48	76,6 3.02	45 1.77	152 5.98	180 7.09	58,7 2.31	123,8 4.87	80 3.15	32 1.26	26 1.02	849,6 1869.12	M24x80		BFX-607-ES-76.6/63-W1		
76	3	350 5075	420 6090	73 2.87	90,5 3.56	55 2.17	178 7.01	208 8.19	71,4 2.81	152,4 6.00	90 3.54	30 1.18	33 1.30	1110,1 2442.22	M30x100		BFX-608-ES-90.5/73-W1		

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-ES-\*\*-\*\*-W1  
BFX-...-ES-\*\*-\*\*-W5


- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-ES-\*\*-\*\*-W46-K  
BFX-...-ES-\*\*-\*\*-V-W46-K  
BFX-...-ES-\*\*-\*\*-MH-W1-K  
BFX-...-ES-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.



## SAE Single-Part Socket-Weld Counterflange Type BAS-ES • 3000 PSI Series

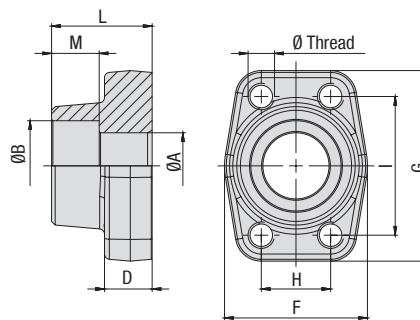

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	M		per 100		Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	21,6	16	47	57	17,5	38,1	36	18	29,4	M8	5/16-18 UNC	BAS-301-ES-21.6/13-W1		
		5075	5075	.51	.85	.63	1.85	2.24	.69	1.50	1.42	.71	64.68					
13	1/2	350	350	13	17,5	16	47	57	17,5	38,1	36	18	30,3	M8	5/16-18 UNC	BAS-301-ES-17.5/13-W1		
		5075	5075	.51	.69	.63	1.85	2.24	.69	1.50	1.42	.71	66.66					
13	1/2	350	350	13	20,3	16	47	57	17,5	38,1	36	18	30,2	M8	5/16-18 UNC	BAS-301-ES-20.3/13-W1		
		5075	5075	.51	.80	.63	1.85	2.24	.69	1.50	1.42	.71	66.44					
19	3/4	350	350	19	27,2	18	50	67	22,3	47,6	36	18	40,1	M10	3/8-16 UNC	BAS-302-ES-27.2/19-W1		
		5075	5075	.75	1.07	.71	1.97	2.64	.88	1.87	1.42	.71	88.22					
19	3/4	350	350	19	25,3	18	50	67	22,3	47,6	36	18	41,9	M10	3/8-16 UNC	BAS-302-ES-25.3/19-W1		
		5075	5075	.75	1.00	.71	1.97	2.64	.88	1.87	1.42	.71	92.18					
25	1	250	315	25	34	18	54	72	26,2	52,4	38	18	46,4	M10	3/8-16 UNC	BAS-303-ES-34/25-W1		
		3625	4568	.98	1.34	.71	2.13	2.83	1.03	2.06	1.50	.71	102.08					
25	1	250	315	25	30,3	18	54	72	26,2	52,4	38	18	50,0	M10	3/8-16 UNC	BAS-303-ES-30.3/25-W1		
		3625	4568	.98	1.19	.71	2.13	2.83	1.03	2.06	1.50	.71	110.00					
32	1-1/4	200	250	32	42,8	21	68	82	30,2	58,7	41	20	68,0	M10 (M12)	7/16-14 UNC	BAS-304-ES-42.8/32-W1		
		2900	3625	1.26	1.69	.83	2.68	3.23	1.19	2.31	1.61	.79	149.60					
32	1-1/4	200	250	32	38,3	21	68	82	30,2	58,7	41	20	72,0	M10 (M12)	7/16-14 UNC	BAS-304-ES-38.3/32-W1		
		2900	3625	1.26	1.51	.83	2.68	3.23	1.19	2.31	1.61	.79	158.40					
38	1-1/2	200	200	38	48,6	25	79	96	35,7	69,9	44	22	107,3	M12 (M14)	1/2-13 UNC	BAS-305-ES-48.6/38-W1		
		2900	2900	1.50	1.91	.98	3.11	3.78	1.41	2.75	1.73	.87	236.06					
38	1-1/2	200	200	38	50,5	25	79	96	35,7	69,9	44	22	105,7	M12 (M14)	1/2-13 UNC	BAS-305-ES-50.5/38-W1		
		2900	2900	1.50	1.99	.98	3.11	3.78	1.41	2.75	1.73	.87	232.54					
51	2	160	200	51	61	25,5	88	102	42,9	77,8	45	24	126,0	M12 (M14)	1/2-13 UNC	BAS-306-ES-61/51-W1		
		2320	2900	2.01	2.40	1.00	3.46	4.02	1.69	3.06	1.77	.94	277.20					
64	2-1/2	100	160	63	76,6	26	101	115	50,8	88,9	50	28	145,0	M12 (M14)	1/2-13 UNC	BAS-307-ES-76.6/63-W1		
		1450	2320	2.48	3.02	1.02	3.98	4.53	2.00	3.50	1.97	1.10	319.00					
76	3	100	100	73	90,5	27,5	127	137	61,9	106,4	50	28	217,7	M16	5/8-11 UNC	BAS-308-ES-90.5/73-W1		
		1450	1450	2.87	3.56	1.08	5.00	5.39	2.44	4.19	1.97	1.10	478.94					
89	3-1/2	35	35	89	103	27,5	138	155	69,9	120,7	50	30	263,8	M16	5/8-11 UNC	BAS-309-ES-103/89-W1		
		508	508	3.50	4.06	1.08	5.43	6.10	2.75	4.75	1.97	1.18	580.36					
102	4	35	35	99	115,5	27,5	147	163	77,8	130,2	50	30	295,1	M16	5/8-11 UNC	BAS-310-ES-115.5/99-W1		
		508	508	3.90	4.55	1.08	5.79	6.42	3.06	5.13	1.97	1.18	649.22					
127	5	35	35	120	142	28	180	184	92,1	152,4	50	30	390,6	M16	5/8-11 UNC	BAS-311-ES-142/120-W1		
		508	508	4.72	5.59	1.10	7.09	7.24	3.63	6.00	1.97	1.18	859.32					

### Materials / Ordering Options / Examples

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with Metric tapped holes

**BAS-...-ES-\*\*-\*\*/W1**

\* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request)  
with Metric tapped holes

**BAS-...-ES-\*\*-\*\*/W5**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with size of Metric tapped holes deviating from the standard (e.g. M14)

**BAS-...-ES-\*\*-\*\*/M14-W1**

\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with UNC tapped holes

**BAS-...-ES-\*\*-\*\*/U-W1**


Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.





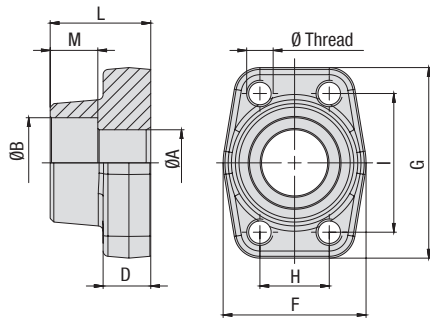

## SAE Single-Part Socket-Weld Counterflange Type BAS-ES • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		Ø Thread		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	L	M	per 100	Metric	UNC			
13	1/2	350	420	13	21,6	16,5	47	57	18,2	40,5	36	18	28,3	M8	5/16-18 UNC	BAS-601-ES-21.6/13-W1		
		5075	6090	.51	.85	.65	1.85	2.24	.72	1.59	1.42	.71	62.26					
13	1/2	350	420	13	17,5	16,5	47	57	18,2	40,5	36	18	30,0	M8	5/16-18 UNC	BAS-601-ES-17.5/13-W1		
		5075	6090	.51	.69	.65	1.85	2.24	.72	1.59	1.42	.71	66.00					
13	1/2	350	420	13	20,3	16,5	47	57	18,2	40,5	36	18	29,0	M8	5/16-18 UNC	BAS-601-ES-20.3/13-W1		
		5075	6090	.51	.80	.65	1.85	2.24	.72	1.59	1.42	.71	63.80					
19	3/4	350	420	19	27,2	19,5	54	72	23,8	50,8	36	20	51,2	M10	3/8-16 UNC	BAS-602-ES-27.2/19-W1		
		5075	6090	.75	1.07	.77	2.13	2.83	.94	2.00	1.42	.79	112.64					
19	3/4	350	420	19	25,3	19,5	54	72	23,8	50,8	36	20	52,5	M10	3/8-16 UNC	BAS-602-ES-25.3/19-W1		
		5075	6090	.75	1.00	.77	2.13	2.83	.94	2.00	1.42	.79	115.50					
25	1	350	420	25	34	24,5	68	82	27,8	57,2	44	22	77,1	M12	7/16-14 UNC	BAS-603-ES-34/25-W1		
		5075	6090	.98	1.34	.96	2.68	3.23	1.09	2.25	1.73	.87	169.62					
25	1	350	420	25	30,3	24,5	68	82	27,8	57,2	44	22	91,1	M12	7/16-14 UNC	BAS-603-ES-30.3/25-W1		
		5075	6090	.98	1.19	.96	2.68	3.23	1.09	2.25	1.73	.87	200.42					
32	1-1/4	350	420	32	42,8	27,5	79	95	31,8	66,6	44	22	117,1	M12	1/2-13 UNC	BAS-604-ES-42.8/32-W1		
		5075	6090	1.26	1.69	1.08	3.11	3.74	1.25	2.62	1.73	.87	257.62					
32	1-1/4	350	420	32	42,8	27,5	79	95	31,8	66,6	44	22	116,7	M14		BAS-604-ES-42.8/32-M14-W1		
		5075	6090	1.26	1.69	1.08	3.11	3.74	1.25	2.62	1.73	.87	256.74					
32	1-1/4	350	420	32	38,3	27,5	79	95	31,8	66,6	44	22	126,2	M12	1/2-13 UNC	BAS-604-ES-38.3/32-W1		
		5075	6090	1.26	1.51	1.08	3.11	3.74	1.25	2.62	1.73	.87	277.64					
32	1-1/4	350	420	32	38,3	27,5	79	95	31,8	66,6	44	22	123,9	M14		BAS-604-ES-38.3/32-M14-W1		
		5075	6090	1.26	1.51	1.08	3.11	3.74	1.25	2.62	1.73	.87	272.58					
38	1-1/2	350	420	38	48,6	31	88	108	36,5	79,3	51	24	184,2	M16	5/8-11 UNC	BAS-605-ES-48.6/38-W1		
		5075	6090	1.50	1.91	1.22	3.46	4.25	1.44	3.12	2.01	.94	405.24					
38	1-1/2	350	420	38	50,5	31	88	108	36,5	79,3	51	24	191,4	M16	5/8-11 UNC	BAS-605-ES-50.5/38-W1		
		5075	6090	1.50	1.99	1.22	3.46	4.25	1.44	3.12	2.01	.94	421.08					
51	2	350	420	51	61	37	118	137	44,5	96,8	65	24	356,9	M20	3/4-10 UNC	BAS-606-ES-61/51-W1		
		5075	6090	2.01	2.40	1.46	4.65	5.39	1.75	3.81	2.56	.94	785.18					
64	2-1/2	350	420	63	76,6	45	152	180	58,7	123,8	80	32	740,2	M24		BAS-607-ES-76.6/63-W1		
		5075	6090	2.48	3.02	1.77	5.98	7.09	2.31	4.87	3.15	1.26	1628.44					
76	3	350	420	73	90,5	55	178	208	71,4	152,4	90	30	1304,8	M30		BAS-608-ES-90.5/73-W1		
		5075	6090	2.87	3.56	2.17	7.01	8.19	2.81	6.00	3.54	1.18	2870.56					

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


### Materials / Ordering Options / Examples

- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-ES-\*/\*\*-W1**
- \* SAE Single-Part Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-ES-\*/\*\*-W5**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-ES-\*/\*\*-M14-W1**
- \* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-ES-\*/\*\*-U-W1**

Please always indicate ØB / ØA.



## SAE Single-Part Socket-Weld Flange (Flat Style) Type BFX-FL-ES ▪ 3000 PSI Series

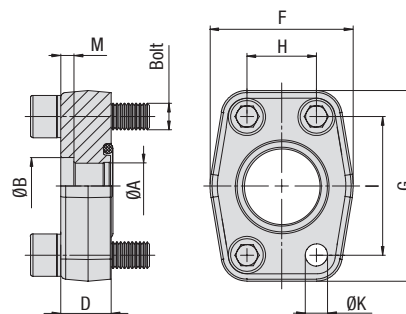

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca. per 100		for Bolts Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	M	ØK					
13	1/2	40	40	15	22,5	10	47	57	17,5	38,1	3	8,7	12,8	M8x25	28.16		BFX-FL-301-ES-22.5/15-W1
		580	580	.59	.89	.39	1.85	2.24	.69	1.50	.12	.34	28.16				
19	3/4	40	40	20	28,5	12	50	67	22,3	47,6	4	10,5	18,7	M10x30	41.14		BFX-FL-302-ES-28.5/20-W1
		580	580	.79	1.12	.47	1.97	2.64	.88	1.87	.16	.41	41.14				
25	1	40	40	29	35,5	12	54	72	26,2	52,4	4	10,5	19,7	M10x30	43.34		BFX-FL-303-ES-35.5/29-W1
		580	580	1.14	1.40	.47	2.13	2.83	1.03	2.06	.16	.41	43.34				
32	1-1/4	40	40	34	42,5	12	68	82	30,2	58,7	4	11,5	26,9	M10x30	59.18		BFX-FL-304-ES-42.5/34-W1
		580	580	1.34	1.67	.47	2.68	3.23	1.19	2.31	.16	.45	59.18				
38	1-1/2	40	40	42	49	15	79	96	35,7	69,9	4	13,5	45,7	M12x35	100.54		BFX-FL-305-ES-49/42-W1
		580	580	1.65	1.93	.59	3.11	3.78	1.41	2.75	.16	.53	100.54				
51	2	40	40	53	61	15	88	102	42,9	77,8	4	13,5	55,5	M12x35	122.10		BFX-FL-306-ES-61/53-W1
		580	580	2.09	2.40	.59	3.46	4.02	1.69	3.06	.16	.53	122.10				
64	2-1/2	40	40	64	77	15	101	115	50,8	88,9	4	13,5	68,0	M12x35	149.60		BFX-FL-307-ES-77/64-W1
		580	580	2.52	3.03	.59	3.98	4.53	2.00	3.50	.16	.53	149.60				
76	3	40	40	80	90	20	127	137	61,9	106,4	5	17	125,8	M16x50	276.76		BFX-FL-308-ES-90/80-W1
		580	580	3.15	3.54	.79	5.00	5.39	2.44	4.19	.20	.67	276.76				
89	3-1/2	35	35	93	103	20	138	155	69,9	120,7	5	17	143,5	M16x50	315.70		BFX-FL-309-ES-103/93-W1
		508	508	3.66	4.06	.79	5.43	6.10	2.75	4.75	.20	.67	315.70				
102	4	35	35	105	116	25	147	163	77,8	130,2	6	17	194,6	M16x50	428.12		BFX-FL-310-ES-116/105-W1
		508	508	4.13	4.57	.98	5.79	6.42	3.06	5.13	.24	.67	428.12				
125	5	35	35	126	141	28	170	190	92,1	152,4	8	17	287,8	M16x50	633.16		BFX-FL-311-ES-141/126-W1
		508	508	4.96	5.55	1.10	6.69	7.48	3.63	6.00	.31	.67	633.16				

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

\* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)

**BFX-FL-...-ES-\*\*-\*\*-W1**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

**BFX-FL-...-ES-\*\*-\*\*-W46-K**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

**BFX-FL-...-ES-\*\*-\*\*-V-W46-K**

\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)


**BFX-FL-...-ES-\*\*-\*\*-MH-W1-K**

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



## SAE Single-Part Socket-Weld Counterflange (Flat Style) Type BAS-FL-ES • 3000 PSI Series

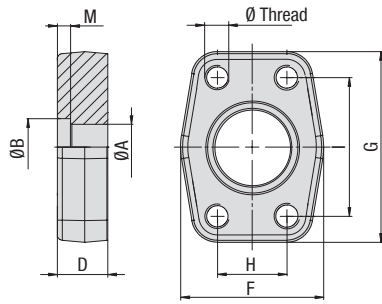

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100		Ø Thread	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	M			Metric	
13	1/2	40	40	15	22,5	10	47	57	17,5	38,1	3	14,4		M8	BAS-FL-301-ES-22.5/15-W1
		580	580	.59	.89	.39	1.85	2.24	.69	1.50	.12	31.68			
19	3/4	40	40	20	28,5	12	50	67	22,3	47,6	4	20,5		M10	BAS-FL-302-ES-28.5/20-W1
		580	580	.79	1.12	.47	1.97	2.64	.88	1.87	.16	45.10			
25	1	40	40	29	35,5	12	54	72	26,2	52,4	4	21,6		M10	BAS-FL-303-ES-35.5/29-W1
		580	580	1.14	1.40	.47	2.13	2.83	1.03	2.06	.16	47.52			
32	1-1/4	40	40	34	42,5	12	68	82	30,2	58,7	4	29,5		M10	BAS-FL-304-ES-42.5/34-W1
		580	580	1.34	1.67	.47	2.68	3.23	1.19	2.31	.16	64.90			
38	1-1/2	40	40	42	49	15	79	96	35,7	69,9	4	48,6		M12	BAS-FL-305-ES-49/42-W1
		580	580	1.65	1.93	.59	3.11	3.78	1.41	2.75	.16	106.92			
51	2	40	40	53	61	15	88	102	42,9	77,8	4	59,8		M12	BAS-FL-306-ES-61/53-W1
		580	580	2.09	2.40	.59	3.46	4.02	1.69	3.06	.16	131.56			
64	2-1/2	40	40	64	77	15	101	115	50,8	88,9	4	72,4		M12	BAS-FL-307-ES-77/64-W1
		580	580	2.52	3.03	.59	3.98	4.53	2.00	3.50	.16	159.28			
76	3	40	40	80	90	20	127	137	61,9	106,4	5	132,9		M16	BAS-FL-308-ES-90/80-W1
		580	580	3.15	3.54	.79	5.00	5.39	2.44	4.19	.20	292.38			
89	3-1/2	35	35	93	103	20	138	155	69,9	120,7	5	151,6		M16	BAS-FL-309-ES-103/93-W1
		508	508	3.66	4.06	.79	5.43	6.10	2.75	4.75	.20	333.52			
102	4	35	35	105	116	25	147	163	77,8	130,2	6	203,9		M16	BAS-FL-310-ES-116/105-W1
		508	508	4.13	4.57	.98	5.79	6.42	3.06	5.13	.24	448.58			
125	5	35	35	126	141	28	170	190	92,1	152,4	8	293,0		M16	BAS-FL-311-ES-141/126-W1
		508	508	4.96	5.55	1.10	6.69	7.48	3.63	6.00	.31	644.60			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


\* SAE Single-Part Counterflange made of Steel S355J0 or equivalent, blank (oiled)  
with Metric tapped holes

BAS-FL-...-ES-\*\*-\*\*-W1

Please always indicate ØB / ØA.



## SAE Single-Part Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type BFX-L/S • 3000 PSI Series

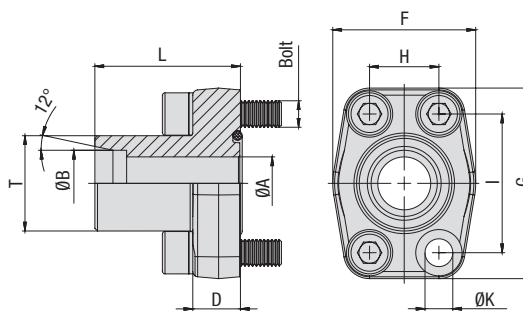

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)		Series	Dimensions										Weight (kg/lbs) Ca.		for Bolts Metric <sup>3</sup>	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB		D	F	G	H	I	L	T (Metric)	ØK <sup>3</sup>			per 100			
13	1/2	315	315	11	15	L	16	43	57	17,5	38,1	47	22x1,5	8,7		26,2			M8x30	BFX-301-15L-W66
		4568	4568	.43	.59		.63	1.69	2.24	.69	1.50	1.85		.34		57.64				
19	3/4	350	350	16	20	S	18	50	67	22,3	47,6	52	30x2	10,5		40,7			M10x35	BFX-302-20S-W66
		5075	5075	.63	.79		.71	1.97	2.64	.88	1.87	2.05		.41		89.54				
19	3/4	160	160	19	22	L	18	50	67	22,3	47,6	52	30x2	10,5		42,4			M10x35	BFX-302-22L-W66
		2320	2320	.75	.87		.71	1.97	2.64	.88	1.87	2.05		.41		93.28				
25	1	250	315	16	20	S	18	54	72	26,2	52,4	55	30x2	10,5		52,5			M10x35	BFX-303-20S-W66
		3625	4568	.63	.79		.71	2.13	2.83	1.03	2.06	2.17		.41		115.50				
25	1	250	315	20	25	S	18	54	72	26,2	52,4	55	36x2	10,5		56,1			M10x35	BFX-303-25S-W66
		3625	4568	.79	.98		.71	2.13	2.83	1.03	2.06	2.17		.41		123.42				
25	1	160	160	23	28	L	18	54	72	26,2	52,4	55	36x2	10,5		52,5			M10x35	BFX-303-28L-W66
		2320	2320	.91	1.10		.71	2.13	2.83	1.03	2.06	2.17		.41		115.50				
32	1-1/4	200	250	20	25	S	21	68	82	30,2	58,7	60	36x2	11,5 (13,5)		81,0			M10x40 (M12x40)	BFX-304-25S-W66
		2900	3625	.79	.98		.83	2.68	3.23	1.19	2.31	2.36		.45 (.53)		178.20				
32	1-1/4	200	250	25	30	S	21	68	82	30,2	58,7	60	42x2	11,5 (13,5)		69,7			M10x40 (M12x40)	BFX-304-30S-W66
		2900	3625	.98	1.18		.83	2.68	3.23	1.19	2.31	2.36		.45 (.53)		153.34				
32	1-1/4	160	160	30	35	L	21	68	82	30,2	58,7	60	45x2	11,5 (13,5)		80,1			M10x40 (M12x40)	BFX-304-35L-W66
		2320	2320	1.18	1.38		.83	2.68	3.23	1.19	2.31	2.36		.45 (.53)		176.22				
38	1-1/2	200	200	32	38	S	25	74	96	35,7	69,9	70	52x2	13,5 (14,5)		130,5			M12x45 (M14x45)	BFX-305-38S-W66
		2900	2900	1.26	1.50		.98	2.91	3.78	1.41	2.75	2.76		.53 (.57)		287.10				
38	1-1/2	160	160	36	42	L	25	74	96	35,7	69,9	70	52x2	13,5 (14,5)		121,2			M12x45 (M14x45)	BFX-305-42L-W66
		2320	2320	1.42	1.65		.98	2.91	3.78	1.41	2.75	2.76		.53 (.57)		266.64				

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

\* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated

**BFX-...-...-W66**

\* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX-...-...-W5**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-...-W66-K**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

**BFX-...-...-V-W66-K**

\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-...-MH-W129-K**


Please always indicate ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



## SAE Single-Part Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type BFX-L/S • 6000 PSI Series

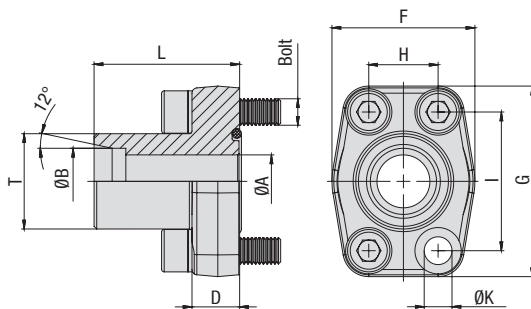

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)													Weight (kg/lbs) Ca. per 100	for Bolts	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	Series	D	F	G	H	I	L	T (Metric)	ØK		Metric	
13	1/2	350	420	12	16	S	16	43	57	18,2	40,5	47	24x1,5	8,7	27,3	M8x30	BFX-601-16S-W66
		5075	6090	.47	.63		.63	1.69	2.24	.72	1.59	1.85		.34	60.06		
19	3/4	350	420	12	16	S	18	54	72	23,8	50,8	52	24x1,5	10,5	53,2	M10x35	BFX-602-16S-W66
		5075	6090	.47	.63		.71	2.13	2.83	.94	2.00	2.05		.41	117.04		
19	3/4	350	400	16	20	S	18	54	72	23,8	50,8	52	30x2	10,5	52,7	M10x35	BFX-602-20S-W66
		5075	5800	.63	.79		.71	2.13	2.83	.94	2.00	2.05		.41	115.94		
19	3/4	350	400	18	25	S	18	54	72	23,8	50,8	52	36x2	10,5	56,8	M10x35	BFX-602-25S-W66
		5075	5800	.71	.98		.71	2.13	2.83	.94	2.00	2.05		.41	124.96		
25	1	350	400	16	20	S	21	68	82	27,8	57,2	60	30x2	13	76,1	M12x40	BFX-603-20S-W66
		5075	5800	.63	.79		.83	2.68	3.23	1.09	2.25	2.36		.51	167.42		
25	1	350	400	18	25	S	21	68	82	27,8	57,2	60	36x2	13	79,0	M12x40	BFX-603-25S-W66
		5075	5800	.71	.98		.83	2.68	3.23	1.09	2.25	2.36		.51	173.80		
25	1	350	400	25	30	S	21	68	82	27,8	57,2	60	42x2	13	82,4	M12x40	BFX-603-30S-W66
		5075	5800	.98	1.18		.83	2.68	3.23	1.09	2.25	2.36		.51	181.28		
32	1-1/4	350	400	25	30	S	24	75	95	31,8	66,6	68	42x2	13,5	118,2	M12x45	BFX-604-30S-W66
		5075	5800	.98	1.18		.94	2.95	3.74	1.25	2.62	2.68		.53	260.04		
32	1-1/4	350	400	25	30	S	24	75	95	31,8	66,6	68	42x2	15	117,4	M14x45	BFX-604-30S-M14-W66
		5075	5800	.98	1.18		.94	2.95	3.74	1.25	2.62	2.68		.59	258.28		
32	1-1/4	350	400	29	38	S	24	75	95	31,8	66,6	68	52x2	13,5	124,5	M12x45	BFX-604-38S-W66
		5075	5800	1.14	1.50		.94	2.95	3.74	1.25	2.62	2.68		.53	273.90		
32	1-1/4	350	400	29	38	S	27	75	95	31,8	66,6	68	52x2	15	121,6	M14x45	BFX-604-38S-M14-W66
		5075	5800	1.14	1.50		1.06	2.95	3.74	1.25	2.62	2.68		.59	267.52		
38	1-1/2	350	400	32	38	S	27	84	108	36,5	79,3	72	52x2	17	170,7	M16x50	BFX-605-38S-W66
		5075	5800	1.26	1.50		1.06	3.31	4.25	1.44	3.12	2.83		.67	375.54		

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BFX-...-W66**
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **BFX-...-W5**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **BFX-...-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **BFX-...-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **BFX-...-MH-W129-K**

Please always indicate ØB and Series.





## SAE Single-Part Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200) Type BFX-B • 3000 PSI Series

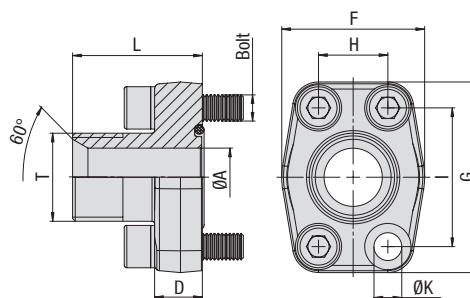

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) Ca.		for Bolts	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	T (BSPP)	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	
13	1/2	350	350	10	16	43	57	17,5	38	37	3/8 (06)	8,7	22,6	M8x30	BFX-301-B06-W66
		5075	5075	.39	.63	1.69	2.24	.69	1.50	1.46		.34	49.72		
13	1/2	350	350	12	16	43	57	17,5	38	39	1/2	8,7	23,6	M8x30	BFX-301-B-W66
		5075	5075	.47	.63	1.69	2.24	.69	1.50	1.54		.34	51.92		
13	1/2	350	350	13	16	43	57	17,5	38	42	3/4 (12)	8,7	25,6	M8x30	BFX-301-B12-W66
		5075	5075	.51	.63	1.69	2.24	.69	1.50	1.65		.34	56.32		
19	3/4	350	350	12	18	50	67	22,3	47,6	42	1/2 (08)	10,5	37,3	M10x35	BFX-302-B08-W66
		5075	5075	.47	.71	1.97	2.64	.88	1.87	1.65		.41	82.06		
19	3/4	350	350	17	18	50	67	22,3	47,6	45	3/4	10,5	39,8	M10x35	BFX-302-B-W66
		5075	5075	.67	.71	1.97	2.64	.88	1.87	1.77		.41	87.56		
19	3/4	350	350	19	18	50	67	22,3	47,6	47	1 (16)	10,5	43,4	M10x35	BFX-302-B16-W66
		5075	5075	.75	.71	1.97	2.64	.88	1.87	1.85		.41	95.48		
25	1	250	315	17	18	54	72	26,2	52,4	47	3/4 (12)	10,5	46,0	M10x35	BFX-303-B12-W66
		3625	4568	.67	.71	2.13	2.83	1.03	2.06	1.85		.41	101.20		
25	1	250	315	22	18	54	72	26,2	52,4	49	1	10,5	47,3	M10x35	BFX-303-B-W66
		3625	4568	.87	.71	2.13	2.83	1.03	2.06	1.93		.41	104.06		
25	1	250	315	25	18	54	72	26,2	52,4	49	1-1/4 (20)	10,5	53,3	M10x35	BFX-303-B20-W66
		3625	4568	.98	.71	2.13	2.83	1.03	2.06	1.93		.41	117.26		
32	1-1/4	200	250	22	21	68	82	30,2	58,7	53	1 (16)	11,5 (13,5)	71,5	M10x40 (M12x40)	BFX-304-B16-W66
		2900	3625	.87	.83	2.68	3.23	1.19	2.31	2.09		.45 (.53)	157.30		
32	1-1/4	200	250	27	21	68	82	30,2	58,7	55	1-1/4	11,5 (13,5)	77,0	M10x40 (M12x40)	BFX-304-B-W66
		2900	3625	1.06	.83	2.68	3.23	1.19	2.31	2.17		.45 (.53)	169.40		
32	1-1/4	200	250	31	21	68	82	30,2	58,7	55	1-1/2 (24)	11,5 (13,5)	88,2	M10x40 (M12x40)	BFX-304-B24-W66
		2900	3625	1.22	.83	2.68	3.23	1.19	2.31	2.17		.45 (.53)	194.04		
38	1-1/2	200	200	27	24	74	96	35,7	69,9	59	1-1/4 (20)	13,5 (14,5)	78,6	M12x45 (M14x45)	BFX-305-B20-W66
		2900	2900	1.06	.94	2.91	3.78	1.41	2.75	2.32		.53 (.57)	172.92		
38	1-1/2	200	200	34	24	74	96	35,7	69,9	61	1-1/2	13,5 (14,5)	107,8	M12x45 (M14x45)	BFX-305-B-W66
		2900	2900	1.34	.94	2.91	3.78	1.41	2.75	2.40		.53 (.57)	237.16		
38	1-1/2	200	200	38	24	74	96	35,7	69,9	63	2 (32)	13,5 (14,5)	123,1	M12x45 (M14x45)	BFX-305-B32-W66
		2900	2900	1.50	.94	2.91	3.78	1.41	2.75	2.48		.53 (.57)	270.82		
51	2	160	200	34	25	88	102	42,9	77,8	69	1-1/2 (24)	13,5 (14,5)	154,9	M12x45 (M14x45)	BFX-306-B24-W66
		2320	2900	1.34	.98	3.46	4.02	1.69	3.06	2.72		.53 (.57)	340.78		
51	2	160	200	42	25	88	102	42,9	77,8	69	2	13,5 (14,5)	155,4	M12x45 (M14x45)	BFX-306-B-W66
		2320	2900	1.65	.98	3.46	4.02	1.69	3.06	2.72		.53 (.57)	341.88		

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-B-W66**

**BFX-...-B-W5**

**BFX-...-B20-W66**

**BFX-...-B-W66-K**

**BFX-...-B-V-W66-K**


**BFX-...-B-MH-W129-K**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



## SAE Single-Part Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200) Type BFX-B • 6000 PSI Series

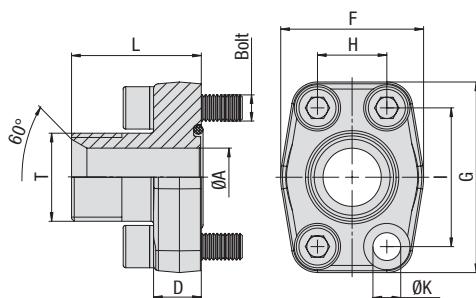

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100		for Bolts Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	T (BSPP)	ØK			
13	1/2	350	420	10	16	43	57	18,2	40,5	38	3/8 (06)	8,7	21,7	M8x30	BFX-601-B06-W66
		5075	6090	.39	.63	1.69	2.24	.72	1.59	1.50		.34	47.74		
13	1/2	350	420	12	16	43	57	18,2	40,5	40	1/2	8,7	23,7	M8x30	BFX-601-B-W66
		5075	6090	.47	.63	1.69	2.24	.72	1.59	1.57		.34	52.14		
13	1/2	350	420	13	16	43	57	18,2	40,5	43	3/4 (12)	8,7	27,5	M8x30	BFX-601-B12-W66
		5075	6090	.51	.63	1.69	2.24	.72	1.59	1.69		.34	60.50		
19	3/4	350	420	12	18	54	72	23,8	50,8	44	1/2 (08)	10,5	43,5	M10x35	BFX-602-B08-W66
		5075	6090	.47	.71	2.13	2.83	.94	2.00	1.73		.41	95.70		
19	3/4	350	420	17	18	54	72	23,8	50,8	47	3/4	10,5	44,9	M10x35	BFX-602-B-W66
		5075	6090	.67	.71	2.13	2.83	.94	2.00	1.85		.41	98.78		
19	3/4	350	420	19	18	54	72	23,8	50,8	49	1 (16)	10,5	50,9	M10x35	BFX-602-B16-W66
		5075	6090	.75	.71	2.13	2.83	.94	2.00	1.93		.41	111.98		
25	1	350	420	17	21	68	82	27,8	57,2	54	3/4 (12)	13	68,7	M12x40	BFX-603-B12-W66
		5075	6090	.67	.83	2.68	3.23	1.09	2.25	2.13		.51	151.14		
25	1	350	420	22	21	68	82	27,8	57,2	56	1	13	71,3	M12x40	BFX-603-B-W66
		5075	6090	.87	.83	2.68	3.23	1.09	2.25	2.20		.51	156.86		
25	1	350	420	25	21	68	82	27,8	57,2	56	1-1/4 (20)	13	79,0	M12x40	BFX-603-B20-W66
		5075	6090	.98	.83	2.68	3.23	1.09	2.25	2.20		.51	173.80		
32	1-1/4	350	420	22	24	75	95	31,8	66,6	61	1 (16)	13,5	116,7	M12x45	BFX-604-B16-W66
		5075	6090	.87	.94	2.95	3.74	1.25	2.62	2.40		.53	256.74		
32	1-1/4	350	420	22	24	75	95	31,8	66,6	61	1 (16)	15	106,9	M14x45	BFX-604-B16-M14-W66
		5075	6090	.87	.94	2.95	3.74	1.25	2.62	2.40		.59	235.18		
32	1-1/4	350	420	27	24	75	95	31,8	66,6	61	1-1/4	13,5	116,7	M12x45	BFX-604-B-W66
		5075	6090	1.06	.94	2.95	3.74	1.25	2.62	2.40		.53	256.74		
32	1-1/4	350	420	27	24	75	95	31,8	66,6	61	1-1/4	15	110,3	M14x45	BFX-604-B-M14-W66
		5075	6090	1.06	.94	2.95	3.74	1.25	2.62	2.40		.59	242.66		
32	1-1/4	350	420	31	24	75	95	31,8	66,6	63	1-1/2 (24)	13,5	106,9	M12x45	BFX-604-B24-W66
		5075	6090	1.22	.94	2.95	3.74	1.25	2.62	2.48		.53	235.18		
32	1-1/4	350	420	31	24	75	95	31,8	66,6	63	1-1/2 (24)	15	114,5	M14x45	BFX-604-B24-M14-W66
		5075	6090	1.22	.94	2.95	3.74	1.25	2.62	2.48		.59	251.90		
38	1-1/2	350	420	27	27	84	108	36,5	79,3	65	1-1/4	17	157,9	M16x50	BFX-605-B20-W66
		5075	6090	1.06	1.06	3.31	4.25	1.44	3.12	2.56		.67	347.38		
38	1-1/2	350	420	32	27	84	108	36,5	79,3	67	1-1/2	17	156,5	M16x50	BFX-605-B-W66
		5075	6090	1.26	1.06	3.31	4.25	1.44	3.12	2.64		.67	344.30		

Please see Page 89 for separate Bolt Sets and Sealings.


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BFX-...-B-W66**
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **BFX-...-B-W5**
- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP) **BFX-...-B20-W66**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **BFX-...-B-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **BFX-...-B-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **BFX-...-B-MH-W129-K**



## SAE Single-Part Flange with Male UN/UNF Thread and 37° JIC Taper (acc. to ISO 8434-2 / SAE J514) Type BFX-J • 3000 / 6000 PSI Series

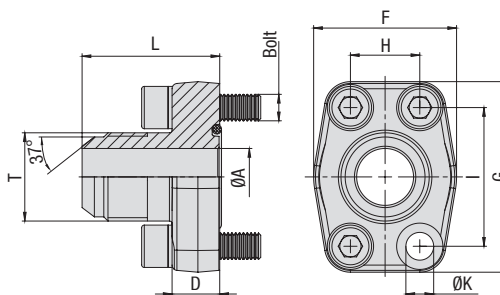

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )								Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	T (UN/UNF)	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	UNC	
13	1/2	350	350	9,9	16	43	57	17,5	38,1	41	3/4–16 (08)	8,7	24,4	M8x30	5/16–18 UNC x 1-1/4	BFX-301-J08-W66
		5075	5075	.39	.63	1.69	2.24	.69	1.50	1.61		.34	53.68			
13	1/2	350	350	12,3	16	43	57	17,5	38,1	41	7/8–14 (10)	8,7	24,2	M8x30	5/16–18 UNC x 1-1/4	BFX-301-J10-W66
		5075	5075	.48	.63	1.69	2.24	.69	1.50	1.61		.34	53.24			
19	3/4	350	350	15,5	18	50	67	22,3	47,6	49	1-1/16–12 (12)	10,5	42,2	M10x35	3/8–16 UNC x 1-1/2	BFX-302-J12-W66
		5075	5075	.61	.71	1.97	2.64	.88	1.87	1.93		.41	92.84			
25	1	250	315	21,5	18	54	72	26,2	52,4	52	1-5/16–12 (16)	10,5	48,8	M10x35	3/8–16 UNC x 1-1/2	BFX-303-J16-W66
		3625	4568	.85	.71	2.13	2.83	1.03	2.06	2.05		.41	107.36			
32	1-1/4	200	200	21,5	21	68	82	30,2	58,7	56	1-5/16–12 (16)	11,5 (13,5)	73,3	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-J16-W66
		2900	2900	.85	.83	2.68	3.23	1.19	2.31	2.20		.45 (.53)	161.26			
32	1-1/4	200	200	27,5	21	68	82	30,2	58,7	58	1-5/8–12 (20)	11,5 (13,5)	77,4	M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-J20-W66
		2900	2900	1.08	.83	2.68	3.23	1.19	2.31	2.28		.45 (.53)	170.28			
38	1-1/2	160	160	33	24	74	96	35,7	69,9	67	1-7/8–12 (24)	13,5 (14,5)	114,7	M12x45 (M14x45)	7/16–14 UNC x 1-3/4	BFX-305-J24-W66
		2320	2320	1.30	.94	2.91	3.78	1.41	2.75	2.64		.53 (.57)	252.34			

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> /in)								Weight for Bolts ( <sup>kg</sup> /lbs) ca.			Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	L	T (UN/UNF)	ØK	per 100	Metric	UNC	
13	1/2	350	400	9,9	16	43	57	18,2	40,5	42	3/4–16 (08)	8,7	24,0	M8x30	5/16–18 UNC x 1-1/4	BFX-601-J08-W66
		5075	5800	.39	.63	1.69	2.24	.72	1.59	1.65		.34	52.80			
13	1/2	350	400	12,3	16	43	57	18,2	40,5	45	7/8–14 (10)	8,7	25,1	M8x30	5/16–18 UNC x 1-1/4	BFX-601-J10-W66
		5075	5800	.48	.63	1.69	2.24	.72	1.59	1.77		.34	55.22			
19	3/4	350	400	15,5	18	54	72	23,8	50,8	51	1-1/16–12 (12)	10,5	49,2	M10x35	3/8–16 UNC x 1-1/2	BFX-602-J12-W66
		5075	5800	.61	.71	2.13	2.83	.94	2.00	2.01		.41	108.24			
25	1	350	400	21,5	21	68	82	27,8	57,2	59	1-5/16–12 (16)	13	72,9	M12x40	1/2–13 UNC x 1-3/4	BFX-603-J16-W66 <sup>2</sup>
		5075	5800	.85	.83	2.68	3.23	1.09	2.25	2.32		.51	160.38			
32	1-1/4	350	400	21,5	24	75	95	31,6	66,6	64	1-5/16–12 (16)	13,5	107,0	M12x45	1/2–13 UNC x 1-3/4	BFX-604-J16-W66
		5075	5800	.85	.94	2.95	3.74	1.24	2.62	2.52		.53	235.40			
32	1-1/4	350	400	21,5	24	75	95	31,6	66,6	64	1-5/16–12 (16)	15	106,9	M14x45		BFX-604-J16-M14-W66
		5075	5800	.85	.94	2.95	3.74	1.24	2.62	2.52		.59	235.18			
32	1-1/4	350	400	27,5	24	75	95	31,6	66,6	66	1-5/8–12 (20)	13,5	106,9	M12x45	1/2–13 UNC x 1-3/4	BFX-604-J20-W66
		5075	5800	1.08	.94	2.95	3.74	1.24	2.62	2.60		.53	235.18			
32	1-1/4	350	400	27,5	24	75	95	31,6	66,6	66	1-5/8–12 (20)	15	111,7	M14x45		BFX-604-J20-M14-W66
		5075	5800	1.08	.94	2.95	3.74	1.24	2.62	2.60		.59	245.74			
38	1-1/2	350	400	33	27	84	108	36,5	79,3	73	1-7/8–12 (24)	17	160,6	M16x50	5/8–11 UNC x 2	BFX-605-J24-W66
		5075	5800	1.30	1.06	3.31	4.25	1.44	3.12	2.87		.67	353.32			

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

\* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated

BFX-...-J\*-W66

\* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX-...-J\*-W5

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

BFX-...-J\*-W66-K

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

BFX-...-J\*-V-W66-K

\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

BFX-...-J\*-MH-W129-K

\* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX-...-J\*-U-W129-K


Please always indicate Thread Size.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

<sup>3</sup> Alternative options shown in brackets are available on request.



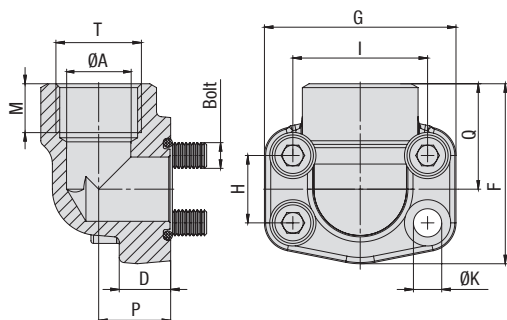

## SAE 90° Single-Part Flange with Female BSPP Thread Type BFX90-G • 3000 / 6000 PSI Series



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)													Weight (kg/lbs) ca. per 100	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	M	P	Q	T (BSPP)	ØK <sup>3</sup>		Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	16	60	54	17,5	38,1	19	20	37	1/2	8,7	31,3	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-G-W1
		5075	5075	.51	.63	2.36	2.13	.69	1.50	.75	.79	1.46		.34	68.86			
13	1/2	350	350	13	16	60	54	17,5	38,1	19	20	37	3/8 (06)	8,7	30,5	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-G06-W1
		5075	5075	.51	.63	2.36	2.13	.69	1.50	.75	.79	1.46		.34	67.10			
19	3/4	350	350	19	18	63	65	22,3	47,6	19	24	38	3/4	10,5	44,4	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-G-W1
		5075	5075	.75	.71	2.48	2.56	.88	1.87	.75	.94	1.50		.41	97.68			
25	1	250	315	25	19	70	70	26,2	52,4	20	28	43	1	10,5	60,0	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-G-W1
		3625	4568	.98	.75	2.76	2.76	1.03	2.06	.79	1.10	1.69		.41	132.00			
32	1-1/4	200	250	32	21	85	79	30,2	58,7	22	34	51	1-1/4	11,5 (13,5)	85,8	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-G-W1
		2900	3625	1.26	.83	3.35	3.11	1.19	2.31	.87	1.34	2.01		.45 (.53)	188.76			
38	1-1/2	200	200	38	25	95	93	35,7	69,9	25	38	56	1-1/2	13,5 (14,5)	123,0	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-G-W1
		2900	2900	1.50	.98	3.74	3.66	1.41	2.75	.98	1.50	2.20		.53 (.57)	270.60			
51	2	160	200	51	25	110	110	42,9	77,8	28	42	65	2	13,5 (14,5)	188,7	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-306-G-W1
		2320	2900	2.01	.98	4.33	4.33	1.69	3.06	1.10	1.65	2.56		.53 (.57)	415.14			

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)													Weight (kg/lbs) ca. per 100	for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	M	P	Q	T (BSPP)	ØK <sup>3</sup>		Metric <sup>3</sup>	UNC	
13	1/2	350	420	13	16	60	56	18,2	40,5	19	20	37	1/2	8,7	29,6	M8x30	5/16-18 UNC x 1-1/4	BFX90-601-G-W1
		5075	6090	.51	.63	2.36	2.20	.72	1.59	.75	.79	1.46		.34	65.12			
13	1/2	350	420	13	16	60	56	18,2	40,5	19	20	37	3/8 (06)	8,7	30,2	M8x30	5/16-18 UNC x 1-1/4	BFX90-601-G06-W1
		5075	6090	.51	.63	2.36	2.20	.72	1.59	.75	.79	1.46		.34	66.44			
19	3/4	350	420	19	19	70	72	23,8	50,8	20	28	43	3/4	10,5	70,8	M10x35	3/8-16 UNC x 1-1/2	BFX90-602-G-W1
		5075	6090	.75	.75	2.76	2.83	.94	2.00	.79	1.10	1.69		.41	155.76			
25	1	350	420	25	21	85	79	27,8	57,2	22	34	51	1	13	109,3	M12x45	1/2-13 UNC x 1-3/4	BFX90-603-G-W1 <sup>2</sup>
		5075	6090	.98	.83	3.35	3.11	1.09	2.25	.87	1.34	2.01		.51	240.46			
32	1-1/4	350	420	32	25	95	93	31,6	66,6	25	38	56	1-1/4	13,5	152,4	M12x45	1/2-13 UNC x 1-3/4	BFX90-604-G-W1
		5075	6090	1.26	.98	3.74	3.66	1.24	2.62	.98	1.50	2.20		.53	335.28			
32	1-1/4	350	420	32	25	95	93	31,6	66,6	25	38	56	1-1/4	15	144,7	M14x45		BFX90-604-G-M14-W1
		5075	6090	1.26	.98	3.74	3.66	1.24	2.62	.98	1.50	2.20		.59	318.34			
38	1-1/2	350	420	38	25	110	110	36,5	79,3	28	42	65	1-1/2	17	245,9	M16x50	5/8-11 UNC x 2	BFX90-605-G-W1
		5075	6090	1.50	.98	4.33	4.33	1.44	3.12	1.10	1.65	2.56		.67	540.98			
51	2	350	420	51	35	132	134	44,5	96,8	33	45	75	2	21	364,3	M20x70	3/4-10 UNC x 2-3/4	BFX90-606-G-W1
		5075	6090	2.01	1.38	5.20	5.28	1.75	3.81	1.30	1.77	2.95		.83	801.46			

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

<sup>3</sup> Alternative options shown in brackets are available on request.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX90-...-G-W1  
BFX90-...-G-W5

- \* Size of connection thread deviating from the standard (e.g. 1-1/4 BSPP)


BFX90-...-G20-W1

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-G-W46-K  
BFX90-...-G-V-W46-K  
BFX90-...-G-MH-W1-K  
BFX90-...-G-U-W1-K



## SAE 90° Single-Part Flange with Female NPT Thread Type BFX90-N • 3000 / 6000 PSI Series

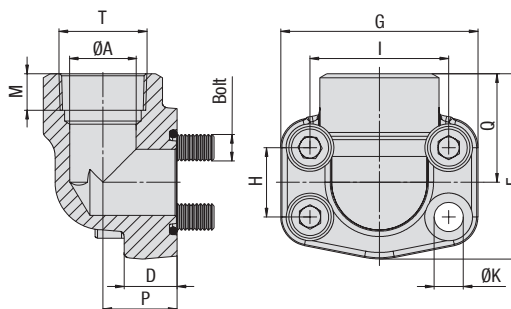

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca. per 100		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	M	P	Q	T (NPT)	ØK <sup>3</sup>		Metric <sup>3</sup>	UNC	
13	1/2	350	350	13	16	60	54	17,5	38,1	19	20	37	1/2	8,7	31,3	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-N-W1
		5075	5075	.51	.63	2.36	2.13	.69	1.50	.75	.79	1.46		.34	68.86			
13	1/2	350	350	13	16	60	54	17,5	38,1	19	20	37	3/8 (06)	8,7	31,3	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-N06-W1
		5075	5075	.51	.63	2.36	2.13	.69	1.50	.75	.79	1.46		.34	68.86			
19	3/4	350	350	19	18	63	65	22,3	47,6	19	24	38	3/4	10,5	47,1	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-N-W1
		5075	5075	.75	.71	2.48	2.56	.88	1.87	.75	.94	1.50		.41	103.62			
25	1	250	315	25	19	70	70	26,2	52,4	20	28	43	1	10,5	58,2	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-N-W1
		3625	4568	.98	.75	2.76	2.76	1.03	2.06	.79	1.10	1.69		.41	128.04			
32	1-1/4	200	250	32	21	85	79	30,2	58,7	22	34	51	1-1/4	11,5 (13,5)	87,9	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-N-W1
		2900	3625	1.26	.83	3.35	3.11	1.19	2.31	.87	1.34	2.01		.45 (.53)	193.38			
38	1-1/2	200	200	38	25	95	93	35,7	69,9	25	38	56	1-1/2	13,5 (14,5)	126,2	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-N-W1
		2900	2900	1.50	.98	3.74	3.66	1.41	2.75	.98	1.50	2.20		.53 (.57)	277.64			
51	2	160	200	51	25	110	110	42,9	77,8	28	42	65	2	13,5 (14,5)	189,0	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-306-N-W1
		2320	2900	2.01	.98	4.33	4.33	1.69	3.06	1.10	1.65	2.56		.53 (.57)	415.80			

Please see Page 89 for separate Bolt Sets and Sealings.

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)										Weight (kg/lbs) ca. per 100		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	M	P	Q	T (NPT)	ØK		Metric	UNC	
13	1/2	350	420	13	16	60	56	18,2	40,5	19	20	37	1/2	8,7	30,0	M8x30	5/16-18 UNC x 1-1/4	BFX90-601-N-W1
		5075	6090	.51	.63	2.36	2.20	.72	1.59	.75	.79	1.46		.34	66.00			
13	1/2	350	420	13	16	60	56	18,2	40,5	19	20	37	3/8 (06)	8,7	30,0	M8x30	5/16-18 UNC x 1-1/4	BFX90-601-N06-W1
		5075	6090	.51	.63	2.36	2.20	.72	1.59	.75	.79	1.46		.34	66.00			
19	3/4	350	420	19	19	70	72	23,8	50,8	20	28	43	3/4	10,5	66,6	M10x35	3/8-16 UNC x 1-1/2	BFX90-602-N-W1
		5075	6090	.75	.75	2.76	2.83	.94	2.00	.79	1.10	1.69		.41	146.52			
25	1	350	420	25	21	85	79	27,8	57,2	22	34	51	1	13	109,0	M12x45	1/2-13 UNC x 1-3/4	BFX90-603-N-W1 <sup>2</sup>
		5075	6090	.98	.83	3.35	3.11	1.09	2.25	.87	1.34	2.01		.51	239.80			
32	1-1/4	350	420	32	25	95	93	31,6	66,6	25	38	56	1-1/4	13,5	145,0	M12x45	1/2-13 UNC x 1-3/4	BFX90-604-N-W1
		5075	6090	1.26	.98	3.74	3.66	1.24	2.62	.98	1.50	2.20		.53	319.00			
32	1-1/4	350	420	32	25	95	93	31,6	66,6	25	38	56	1-1/4	15	150,4	M14x45		BFX90-604-N-M14-W1
		5075	6090	1.26	.98	3.74	3.66	1.24	2.62	.98	1.50	2.20		.59	330.88			
38	1-1/2	350	420	38	25	110	110	36,5	79,3	28	42	65	1-1/2	17	246,0	M16x50	5/8-11 UNC x 2	BFX90-605-N-W1
		5075	6090	1.50	.98	4.33	4.33	1.44	3.12	1.10	1.65	2.56		.67	541.20			
51	2	350	420	51	35	132	134	44,5	96,8	33	45	75	2	21	364,0	M20x70	3/4-10 UNC x 2-3/4	BFX90-606-N-W1
		5075	6090	2.01	1.38	5.20	5.28	1.75	3.81	1.30	1.77	2.95		.83	800.80			

Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX90-...-N-W1  
BFX90-...-N-W5

- \* Size of connection thread deviating from the standard (e.g. 3/8 NPT)

BFX90-...-N06-W1

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-N-W46-K  
BFX90-...-N-V-W46-K  
BFX90-...-N-MH-W1-K  
BFX90-...-N-U-W1-K

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

<sup>3</sup> Alternative options shown in brackets are available on request.





## SAE 90° Single-Part Butt-Weld Flange for High Pressure Tubes Type BFX90-STC - 3000 / 6000 PSI Series

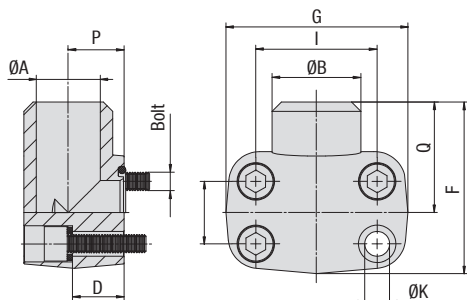


Version A



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca. per 100		for Bolts	Version	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	P	Q	ØK	Metric				
19	3/4	350	350	19	27	21	63	70	22,3	47,6	23	41	11	73,5	M10x40	A	BFX90-302-STC-27/19-W1 <sup>2</sup>	
		5075	5075	.75	1.06	.83	2.48	2.76	.88	1.87	.91	1.61	.43	161.70				
25	1	350	350	23	34,5	24	72	75	26,2	52,4	25	48	11	85,0	M10x45	A	BFX90-303-STC-34.5/23-W1 <sup>3</sup>	
		5075	5075	.91	1.36	.94	2.83	2.95	1.03	2.06	.98	1.89	.43	187.00				
32	1-1/4	200	250	31	43	25	82	86	30,2	58,7	27	54	11,5	80,0	M10x45	A	BFX90-304-STC-43/31-W1	
		2900	3625	1.22	1.69	.98	3.23	3.39	1.19	2.31	1.06	2.13	.45	176.00				
38	1-1/2	200	200	35	50	29	92	97	35,7	69,9	31,5	57	14	189,4	M12x50	A	BFX90-305-STC-50/35-W1	
		2900	2900	1.38	1.97	1.14	3.62	3.82	1.41	2.75	1.24	2.24	.55	416.68				
51	2	200	200	48	65	50	99	100	42,9	77,8	37,5	63	14	214,8	M12x70	A	BFX90-306-STC-65/48-W1	
		2900	2900	1.89	2.56	1.97	3.90	3.94	1.69	3.06	1.48	2.48	.55	472.56				

Please see Page 89 for separate Bolt Sets and Sealings.

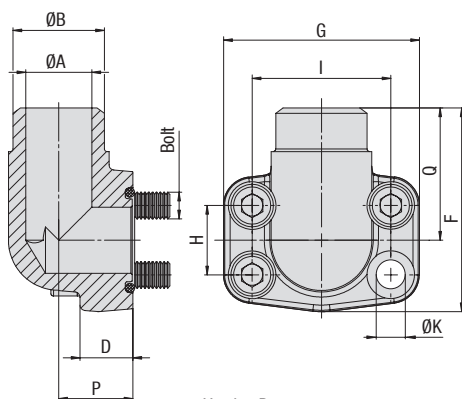

Version B



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )										Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca. per 100		for Bolts	Version	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	P	Q	ØK	Metric				
19	3/4	350	420	19	28	19	70	71	23,8	50,8	22	40	11	50,1	M10x35	B	BFX90-602-STC-28/19-W1	
		5075	6090	.75	1.10	.75	2.76	2.80	.94	2.00	.87	1.57	.43	110.22				
25	1	350	420	25	34	24	82	81	27,8	57,2	27	47	13	77,2	M12x45	B	BFX90-603-STC-34/25-W1	
		5075	6090	.98	1.34	.94	3.23	3.19	1.09	2.25	1.06	1.85	.51	169.84				
32	1-1/4	350	420	32	42	27	95	95	31,8	66,6	32	56	15	119,6	M14x50	B	BFX90-604-STC-42/32-M14-W1	
		5075	6090	1.26	1.65	1.06	3.74	3.74	1.25	2.62	1.26	2.20	.59	263.12				
38	1-1/2	350	420	38	48	30	115	113	36,5	79,3	40	68	17	193,7	M16x50	B	BFX90-605-STC-48/38-W1	
		5075	6090	1.50	1.89	1.18	4.53	4.45	1.44	3.12	1.57	2.68	.67	426.14				

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> Deviant O-ring size: 25,07 x 2,62 mm / .99 x .10 in

<sup>3</sup> Deviant O-ring size: 28,17 x 3,53 mm / 1.11 x .14 in

### Materials / Ordering Options / Examples

\* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)

BFX90-...-STC-\*\*-\*\*-W1

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-STC-\*\*-\*\*-W46-K

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

BFX90-...-STC-V-\*\*-\*\*-W46-K


\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-STC-\*\*-\*\*-MH-W1-K

Please always indicate ØB / ØA.



## SAE 90° Single-Part Butt-Weld Flange for Metric Tubes Type BFX90-SRE ▪ 3000 PSI Series

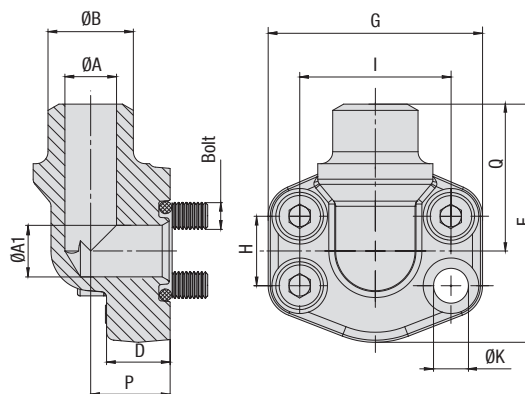

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)													Weight (kg/lbs) ca.	for Bolts	Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	P	Q	ØK <sup>3</sup>	per 100	Metric <sup>3</sup>	UNC	
13	1/2	350	350	14	13	20	16	60	54	17,5	38,1	20	37	8,7	26,9	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-SRE-20/14-W1
		5075	5075	.55	.51	.79	.63	2.36	2.13	.69	1.50	.79	1.46	.34	59.18			
13	1/2	350	350	18	13	22	16	60	54	17,5	38,1	20	37	8,7	27,5	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-SRE-22/18-W1
		5075	5075	.71	.51	.87	.63	2.36	2.13	.69	1.50	.79	1.46	.34	60.50			
13	1/2	350	350	19	13	25	16	60	54	17,5	38,1	20	37	8,7	28,0	M8x30	5/16-18 UNC x 1-1/4	BFX90-301-SRE-25/19-W1
		5075	5075	.75	.51	.98	.63	2.36	2.13	.69	1.50	.79	1.46	.34	61.60			
19	3/4	350	350	19	19	25	18	63	65	22,3	47,6	24	38	10,5	40,6	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-SRE-25/19-W1
		5075	5075	.75	.75	.98	.71	2.48	2.56	.88	1.87	.94	1.50	.41	89.32			
19	3/4	350	350	22	19	28	18	63	65	22,3	47,6	24	38	10,5	39,0	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-SRE-28/22-W1
		5075	5075	.87	.75	1.10	.71	2.48	2.56	.88	1.87	.94	1.50	.41	85.80			
19	3/4	350	350	22	19	30	18	63	65	22,3	47,6	24	38	10,5	40,0	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-SRE-30/22-W1
		5075	5075	.87	.75	1.18	.71	2.48	2.56	.88	1.87	.94	1.50	.41	88.00			
19	3/4	350	350	27	19	35	18	63	65	22,3	47,6	24	38	10,5	42,0	M10x35	3/8-16 UNC x 1-1/2	BFX90-302-SRE-35/27-W1
		5075	5075	1.06	.75	1.38	.71	2.48	2.56	.88	1.87	.94	1.50	.41	92.40			
25	1	250	315	22	25	30	19	70	70	26,2	52,4	28	43	10,5	56,5	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-SRE-30/22-W1
		3625	4568	.87	.98	1.18	.75	2.76	2.76	1.03	2.06	1.10	1.69	.41	124.30			
25	1	250	315	27	25	35	19	70	70	26,2	52,4	28	43	10,5	53,3	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-SRE-35/27-W1
		3625	4568	1.06	.98	1.38	.75	2.76	2.76	1.03	2.06	1.10	1.69	.41	117.26			
25	1	250	315	30	25	38	19	70	70	26,2	52,4	28	43	10,5	55,9	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-SRE-38/30-W1
		3625	4568	1.18	.98	1.50	.75	2.76	2.76	1.03	2.06	1.10	1.69	.41	122.98			
25	1	250	315	36	25	42	19	70	70	26,2	52,4	28	43	10,5	51,8	M10x35	3/8-16 UNC x 1-1/2	BFX90-303-SRE-42/36-W1
		3625	4568	1.42	.98	1.65	.75	2.76	2.76	1.03	2.06	1.10	1.69	.41	113.96			
32	1-1/4	200	250	30	32	38	21	85	79	30,2	58,7	34	51	11,5 (13,5)	79,2	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-SRE-38/30-W1
		2900	3625	1.18	1.26	1.50	.83	3.35	3.11	1.19	2.31	1.34	2.01	.45 (.53)	174.24			
32	1-1/4	200	250	36	32	42	21	85	79	30,2	58,7	34	51	11,5 (13,5)	78,3	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-SRE-42/36-W1
		2900	3625	1.42	1.26	1.65	.83	3.35	3.11	1.19	2.31	1.34	2.01	.45 (.53)	172.26			
32	1-1/4	200	250	39	32	49	21	85	79	30,2	58,7	34	51	11,5 (13,5)	82,5	M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-SRE-49/39-W1
		2900	3625	1.54	1.26	1.93	.83	3.35	3.11	1.19	2.31	1.34	2.01	.45 (.53)	181.50			
38	1-1/2	200	200	30	38	38	25	95	93	35,7	69,9	38	56	13,5 (14,5)	135,0	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-SRE-38/30-W1
		2900	2900	1.18	1.50	1.50	.98	3.74	3.66	1.41	2.75	1.50	2.20	.53 (.57)	297.00			
38	1-1/2	200	200	36	38	42	25	95	93	35,7	69,9	38	56	13,5 (14,5)	124,1	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-SRE-42/36-W1
		2900	2900	1.42	1.50	1.65	.98	3.74	3.66	1.41	2.75	1.50	2.20	.53 (.57)	273.02			
38	1-1/2	200	200	39	38	49	25	95	93	35,7	69,9	38	56	13,5 (14,5)	134,4	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-SRE-49/39-W1
		2900	2900	1.54	1.50	1.93	.98	3.74	3.66	1.41	2.75	1.50	2.20	.53 (.57)	295.68			
51	2	160	200	49	51	61	25	110	110	42,9	77,8	42	65	13,5 (14,5)	199,7	M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-306-SRE-61/49-W1
		2320	2900	1.93	2.01	2.40	.98	4.33	4.33	1.69	3.06	1.65	2.56	.53 (.57)	439.34			

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-SRE-\*\*-\*\*-W1  
BFX90-...-SRE-\*\*-\*\*-W5


BFX90-...-SRE-\*\*-\*\*-W46-K  
BFX90-...-SRE-\*\*-\*\*-V-W46-K  
BFX90-...-SRE-\*\*-\*\*-MH-W1-K  
BFX90-...-SRE-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



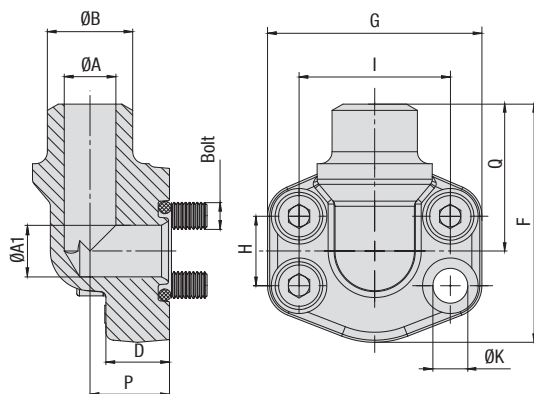

## SAE 90° Single-Part Butt-Weld Flange for Metric Tubes Type BFX90-SRE • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sub>in</sub> )											Weight ( <sup>kg</sup> /lbs) Ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	ØB	D	F	G	H	I	P	Q	ØK	per 100	Metric	UNC		
13	1/2	350	420	14	13	20	16	60	54	18,2	40,5	20	37	8,7	26,6	M8x30	5/16–18 UNC x 1-1/4	BFX90-601-SRE-20/14-W1	
		5075	6090	.55	.51	.79	.63	2.36	2.13	.72	1.59	.79	1.46	.34	58.52				
13	1/2	350	420	17	13	25	16	60	54	18,2	40,5	20	37	8,7	28,3	M8x30	5/16–18 UNC x 1-1/4	BFX90-601-SRE-25/17-W1	
		5075	6090	.67	.51	.98	.63	2.36	2.13	.72	1.59	.79	1.46	.34	62.26				
19	3/4	350	420	17	19	25	19	70	72	23,8	50,8	28	43	10,5	62,2	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-SRE-25/17-W1	
		5075	6090	.67	.75	.98	.75	2.76	2.83	.94	2.00	1.10	1.69	.41	136.84				
19	3/4	350	420	22	19	30	19	70	72	23,8	50,8	28	43	10,5	60,6	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-SRE-30/22-W1	
		5075	6090	.87	.75	1.18	.75	2.76	2.83	.94	2.00	1.10	1.69	.41	133.32				
25	1	350	420	22	25	30	21	85	79	27,8	57,2	34	51	13,5	94,4	M12x45	7/16–14 UNC x 1-3/4	BFX90-603-SRE-30/22-W1 <sup>2</sup>	
		5075	6090	.87	.98	1.18	.83	3.35	3.11	1.09	2.25	1.34	2.01	.53	207.68				
25	1	350	420	28	25	38	21	85	79	27,8	57,2	34	51	13,5	90,9	M12x45	7/16–14 UNC x 1-3/4	BFX90-603-SRE-38/28-W1 <sup>2</sup>	
		5075	6090	1.10	.98	1.50	.83	3.35	3.11	1.09	2.25	1.34	2.01	.53	199.98				
32	1-1/4	350	420	28	32	38	25	95	93	31,8	66,6	38	56	13,5	139,0	M12x45	1/2–13 UNC x 1-3/4	BFX90-604-SRE-38/28-W1	
		5075	6090	1.10	1.26	1.50	.98	3.74	3.66	1.25	2.62	1.50	2.20	.53	305.80				
32	1-1/4	350	420	28	32	38	25	95	93	31,8	66,6	38	56	15	138,6	M14x45		BFX90-604-SRE-38/28-M14-W1	
		5075	6090	1.10	1.26	1.50	.98	3.74	3.66	1.25	2.62	1.50	2.20	.59	304.92				
32	1-1/4	350	420	32	32	49	25	95	93	31,8	66,6	38	56	13,5	145,0	M12x45	1/2–13 UNC x 1-3/4	BFX90-604-SRE-49/32 -W1	
		5075	6090	1.26	1.26	1.93	.98	3.74	3.66	1.25	2.62	1.50	2.20	.53	319.00				
32	1-1/4	350	420	32	32	49	25	95	93	31,8	66,6	38	56	15	146,0	M14x45		BFX90-604-SRE-49/32-M14-W1	
		5075	6090	1.26	1.26	1.93	.98	3.74	3.66	1.25	2.62	1.50	2.20	.59	321.20				
38	1-1/2	350	420	28	38	38	25	110	110	36,5	79,3	42	65	17	240,3	M16x50	5/8–11 UNC x 2	BFX90-605-SRE-38/28-W1	
		5075	6090	1.10	1.50	1.50	.98	4.33	4.33	1.44	3.12	1.65	2.56	.67	528.66				
38	1-1/2	350	420	32	38	49	25	110	110	36,5	79,3	42	65	17	241,1	M16x50	5/8–11 UNC x 2	BFX90-605-SRE-49/32-W1	
		5075	6090	1.26	1.50	1.93	.98	4.33	4.33	1.44	3.12	1.65	2.56	.67	530.42				
38	1-1/2	350	420	40	38	61	25	110	110	36,5	79,3	42	65	17	236,2	M16x50	5/8–11 UNC x 2	BFX90-605-SRE-61/40-W1	
		5075	6090	1.57	1.50	2.40	.98	4.33	4.33	1.44	3.12	1.65	2.56	.67	519.64				
51	2	350	420	40	51	61	35	132	134	44,5	96,8	45	75	21	374,6	M20x70	3/4–10 UNC x 2-3/4	BFX90-606-SRE-61/40-W1	
		5075	6090	1.57	2.01	2.40	1.38	5.20	5.28	1.75	3.81	1.77	2.95	.83	824.12				
51	2	350	420	50	51	76	35	132	134	44,5	96,8	45	75	21	387,4	M20x70	3/4–10 UNC x 2-3/4	BFX90-606-SRE-76/50-W1	
		5075	6090	1.97	2.01	2.99	1.38	5.20	5.28	1.75	3.81	1.77	2.95	.83	852.28				

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX90-...-SRE-\*\*-\*\*-W1  
BFX90-...-SRE-\*\*-\*\*-W5


- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

BFX90-...-SRE-\*\*-\*\*-W46-K  
BFX90-...-SRE-\*\*-\*\*-V-W46-K  
BFX90-...-SRE-\*\*-\*\*-MH-W1-K  
BFX90-...-SRE-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.



## SAE 90° Single-Part Socket-Weld Flange Type BFX90-ES ▪ 3000 PSI Series

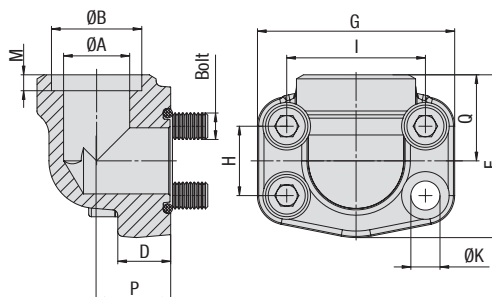

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)													Weight (kg/lbs) ca.		for Bolts		Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	M	P	Q	ØK <sup>3</sup>			per 100		Metric <sup>3</sup>	UNC		
13	1/2	350	350	13	21,6	16	60	54	17,5	38,1	10	20	37	8,7	30,5				M8x30	5/16-18 UNC x 1-1/4	BFX90-301-ES-21.6/13-W1	
		5075	5075	.51	.85	.63	2.36	2.13	.69	1.50	.39	.79	1.46	.34	67.10				M8x30	5/16-18 UNC x 1-1/4	BFX90-301-ES-17.5/13-W1	
13	1/2	350	350	13	17,5	16	60	54	17,5	38,1	10	20	37	8,7	31,1				M8x30	5/16-18 UNC x 1-1/4	BFX90-301-ES-17.5/13-W1	
		5075	5075	.51	.69	.63	2.36	2.13	.69	1.50	.39	.79	1.46	.34	68.42				M8x30	5/16-18 UNC x 1-1/4	BFX90-301-ES-17.5/13-W1	
19	3/4	350	350	19	27,2	18	63	65	22,3	47,6	10	24	38	10,5	45,3				M10x35	3/8-16 UNC x 1-1/2	BFX90-302-ES-27.2/19-W1	
		5075	5075	.75	1.07	.71	2.48	2.56	.88	1.87	.39	.94	1.50	.41	99.66				M10x35	3/8-16 UNC x 1-1/2	BFX90-302-ES-27.2/19-W1	
25	1	250	315	25	34	19	70	70	26,2	52,4	12	28	43	10,5	57,9				M10x35	3/8-16 UNC x 1-1/2	BFX90-303-ES-34/25-W1	
		3625	4568	.98	1.34	.75	2.76	2.76	1.03	2.06	.47	1.10	1.69	.41	127.38				M10x35	3/8-16 UNC x 1-1/2	BFX90-303-ES-34/25-W1	
32	1-1/4	200	250	32	42,8	21	85	79	30,2	58,7	14	34	51	11,5 (13,5)	91,2				M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-ES-42.8/32-W1	
		2900	3625	1.26	1.69	.83	3.35	3.11	1.19	2.31	.55	1.34	2.01	.45 (.53)	200.64				M10x40 (M12x40)	7/16-14 UNC x 1-1/2	BFX90-304-ES-42.8/32-W1	
38	1-1/2	200	200	38	48,6	25	95	93	35,7	69,9	16	38	56	13,5 (14,5)	129,2				M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-ES-48.6/38-W1	
		2900	2900	1.50	1.91	.98	3.74	3.66	1.41	2.75	.63	1.50	2.20	.53 (.57)	284.24				M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-305-ES-48.6/38-W1	
51	2	160	200	51	61	25	110	110	42,9	77,8	18	42	65	13,5 (14,5)	193,9				M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-306-ES-61/51-W1	
		2320	2900	2.01	2.40	.98	4.33	4.33	1.69	3.06	.71	1.65	2.56	.53 (.57)	426.58				M12x45 (M14x45)	1/2-13 UNC x 1-3/4	BFX90-306-ES-61/51-W1	

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX90-...-ES-\*\*-\*\*-W1  
BFX90-...-ES-\*\*-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


BFX90-...-ES-\*\*-\*\*-W46-K  
BFX90-...-ES-\*\*-\*\*-V-W46-K  
BFX90-...-ES-\*\*-\*\*-MH-W1-K  
BFX90-...-ES-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>3</sup> Alternative options shown in brackets are available on request.



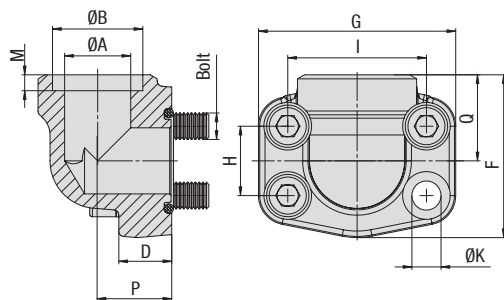

## SAE 90° Single-Part Socket-Weld Flange Type BFX90-ES • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions (mm/in)												Weight ( <sup>kg</sup> /lbs) ca.		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	D	F	G	H	I	M	P	Q	ØK	per 100	Metric	UNC			
13	1/2	350 5075	420 6090	13 .51	21,6 .85	16 .63	60 2.36	54 2.13	18,2 .72	40,5 1.59	10 .39	20 .79	37 1.46	8,7 .34	30,1 66.22	M8x30	5/16–18 UNC x 1-1/4	BFX90-601-ES-21.6/13-W1		
13	1/2	350 5075	420 6090	13 .51	17,5 .69	16 .63	60 2.36	54 2.13	18,2 .72	40,5 1.59	10 .39	20 .79	37 1.46	8,7 .34	31,3 68.86	M8x30	5/16–18 UNC x 1-1/4	BFX90-601-ES-17.5/13-W1		
19	3/4	350 5075	420 6090	19 .75	27,2 1.07	19 .75	70 2.76	72 2.83	23,8 .94	50,8 2.00	12 .47	28 1.10	43 1.69	10,5 .41	70,5 155.10	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-ES-27.2/19-W1		
19	3/4	350 5075	420 6090	16/19 .63/.74	20,3 .80	19 .75	70 2.76	72 2.83	23,8 .94	50,8 2.00	12 .47	28 1.10	43 1.69	10,5 .41	54,0 118.80	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-ES-20.3/16-W1		
19	3/4	350 5075	420 6090	19 .75	25,3 1.00	19 .75	70 2.76	72 2.83	23,8 .94	50,8 2.00	12 .47	28 1.10	43 1.69	10,5 .41	72,9 160.38	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-ES-25.3/19-W1		
19	3/4	350 5075	420 6090	25/19 .98/.74	30,3 1.19	19 .75	70 2.76	72 2.83	23,8 .94	50,8 2.00	12 .47	28 1.10	43 1.69	10,5 .41	65,3 143.66	M10x35	3/8–16 UNC x 1-1/2	BFX90-602-ES-30.3/25-W1		
25	1	350 5075	420 6090	25 .98	34 1.34	21 .83	85 3.35	79 3.11	27,8 1.09	57,2 2.25	14 .55	34 1.34	51 2.01	13 .51	108,2 238.04	M12x45	7/16–14 UNC x 1-3/4	BFX90-603-ES-34/25-W1 <sup>2</sup>		
25	1	350 5075	420 6090	25 .98	30,3 1.19	21 .83	85 3.35	79 3.11	27,8 1.09	57,2 2.25	14 .55	34 1.34	51 2.01	13 .51	113,9 250.58	M12x45	7/16–14 UNC x 1-3/4	BFX90-603-ES-30.3/25-W1 <sup>2</sup>		
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	13,5 .53	161,7 355.74	M12x45	1/2–13 UNC x 1-3/4	BFX90-604-ES-42.8/32-W1		
32	1-1/4	350 5075	420 6090	32 1.26	42,8 1.69	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	15 .59	145,5 320.10	M14x45		BFX90-604-ES-42.8/32-M14-W1		
32	1-1/4	350 5075	420 6090	22/32 .87/1.25	30,3 1.19	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	13,5 .53	177,0 389.40	M12x45	1/2–13 UNC x 1-3/4	BFX90-604-ES-30.3/22-W1		
32	1-1/4	350 5075	420 6090	22/32 .87/1.25	30,3 1.19	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	15 .59	176,6 388.52	M14x45		BFX90-604-ES-30.3/22-M14-W1		
32	1-1/4	350 5075	420 6090	27/32 1.06/1.25	38,3 1.51	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	13,5 .53	176,6 388.52	M12x45	1/2–13 UNC x 1-3/4	BFX90-604-ES-38.3/27-W1		
32	1-1/4	350 5075	420 6090	27/32 1.06/1.25	38,3 1.51	25 .98	95 3.74	93 3.66	31,8 1.25	66,6 2.62	16 .63	38 1.50	56 2.20	15 .59	161,7 355.74	M14x45		BFX90-604-ES-38.3/27-M14-W1		
38	1-1/2	350 5075	420 6090	38 1.50	48,6 1.91	25 .98	110 4.33	110 4.33	36,5 1.44	79,3 3.12	18 .71	42 1.65	65 2.56	17 .67	254,2 559.24	M16x50	5/8–11 UNC x 2	BFX90-605-ES-48.6/38-W1		
51	2	350 5075	420 6090	51 2.01	61 2.40	35 1.38	132 5.20	134 5.28	44,5 1.75	96,8 3.81	28 1.10	45 1.77	75 2.95	21 .83	333,6 733.92	M20x70	3/4–10 UNC x 2-3/4	BFX90-606-ES-61/51-W1		

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

BFX90-...-ES-\*\*-\*\*-W1  
BFX90-...-ES-\*\*-\*\*-W5

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)


BFX90-...-ES-\*\*-\*\*-W46-K  
BFX90-...-ES-\*\*-\*\*-V-W46-K  
BFX90-...-ES-\*\*-\*\*-MH-W1-K  
BFX90-...-ES-\*\*-\*\*-U-W1-K

Please always indicate ØB / ØA.





## SAE 90° Single-Part Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) ▪ Type BFX90-L/S ▪ 3000 PSI Series

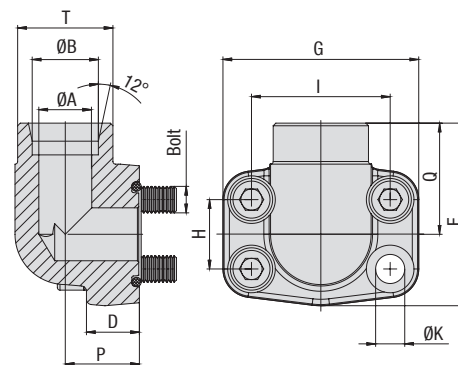

3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions (mm/in)										Weight ( <sup>kg</sup> /lbs) ca.		for Bolts	Ordering Codes	
DN	(in)	8.8	10.9 (MH)	ØA	ØB	Series	D	F	G	H	I	P	Q	T (Metric)	ØK	per 100	Metric	
13	1/2	315	315	11	15	L	16	60	54	17,5	38,1	18	36	22x1,5	9	31,3	M8x30	BFX90-301-15L-W66
		4568	4568	.43	.59		.63	2.36	2.13	.69	1.50	.71	1.42	.35	68.86			
13	1/2	350	350	12	16	S	16	60	54	17,5	38,1	18	36	24x1,5	9	29,4	M8x30	BFX90-301-16S-W66
		5075	5075	.47	.63		.63	2.36	2.13	.69	1.50	.71	1.42	.35	64.68			
19	3/4	350	350	12	16	S	18	63	65	22,3	47,6	22	38	24x1,5	11	29,5	M10x35	BFX90-302-16S-W66
		5075	5075	.47	.63		.71	2.48	2.56	.88	1.87	.87	1.50	.43	64.90			
19	3/4	350	350	16	20	S	18	63	65	22,3	47,6	22	38	30x2	11	43,8	M10x35	BFX90-302-20S-W66
		5075	5075	.63	.79		.71	2.48	2.56	.88	1.87	.87	1.50	.43	96.36			
19	3/4	160	160	18	22	L	18	63	65	22,3	47,6	22	38	30x2	11	43,1	M10x35	BFX90-302-22L-W66
		2320	2320	.71	.87		.71	2.48	2.56	.88	1.87	.87	1.50	.43	94.82			
25	1	250	315	20	25	S	19	70	70	26,2	52,4	28	42	36x2	11	62,5	M10x35	BFX90-303-25S-W66
		3625	4568	.79	.98		.75	2.76	2.76	1.03	2.06	1.10	1.65	.43	137.50			
25	1	160	160	23	28	L	19	70	70	26,2	52,4	28	42	36x2	11	63,4	M10x35	BFX90-303-28L-W66
		2320	2320	.91	1.10		.75	2.76	2.76	1.03	2.06	1.10	1.65	.43	139.48			
32	1-1/4	200	250	20	25	S	22	85	79	30,2	58,7	30	50	36x2	11,5	109,1	M10x40	BFX90-304-25S-W66
		2900	3625	.79	.98		.87	3.35	3.11	1.19	2.31	1.18	1.97	.45	240.02			
32	1-1/4	200	250	25	30	S	22	85	79	30,2	58,7	30	50	42x2	11,5	103,4	M10x40	BFX90-304-30S-W66
		2900	3625	.98	1.18		.87	3.35	3.11	1.19	2.31	1.18	1.97	.45	227.48			
32	1-1/4	160	160	30	35	L	22	85	79	30,2	58,7	30	50	45x2	11,5	89,9	M10x40	BFX90-304-35L-W66
		2320	2320	1.18	1.38		.87	3.35	3.11	1.19	2.31	1.18	1.97	.45	197.78			
38	1-1/2	200	200	32	38	S	25	95	93	35,7	69,8	36	58	52x2	13,5	151,6	M12x45	BFX90-305-38S-W66
		2900	2900	1.26	1.50		.98	3.74	3.66	1.41	2.75	1.42	2.28	.53	333.52			
38	1-1/2	160	160	36	42	L	25	95	93	35,7	69,8	36	58	52x2	13,5	141,3	M12x45	BFX90-305-42L-W66
		2320	2320	1.42	1.65		.98	3.74	3.66	1.41	2.75	1.42	2.28	.53	310.96			

Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples

\* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated

**BFX90-...-...-W66**

\* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX90-...-...-W5**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

**BFX90-...-...-W66-K**

\* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)

**BFX90-...-...-V-W66-K**


\* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)

**BFX90-...-...-MH-W129-K**

Please always indicate ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.



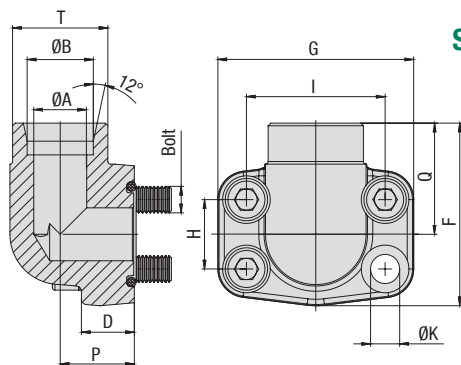

## SAE 90° Single-Part Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) • Type BFX90-L/S • 6000 PSI Series



6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> ( <sup>bar</sup> /PSI)		Dimensions (mm/in)												Weight ( <sup>kg</sup> /lbs) ca.		for Bolts	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØB	Series	D	F	G	H	I	P	Q	T (Metric)	ØK	per 100	Metric		
13	1/2	350	420	12	16	S	16	60	54	18,2	40,5	20	36	24x1,5	9	29,8	M8x30	BFX90-601-16S-W66	
		5075	6090	.47	.63		.63	2.36	2.13	.72	1.59	.79	1.42		.35	65.56			
19	3/4	350	420	12	16	S	19	70	72	23,8	50,8	26	41	24x1,5	11	64,3	M10x35	BFX90-602-16S-W66	
		5075	6090	.47	.63		.75	2.76	2.83	.94	2.00	1.02	1.61		.43	141.46			
19	3/4	350	400	20	20	S	19	70	72	23,8	50,8	26	41	30x2	11	66,5	M10x35	BFX90-602-20S-W66	
		5075	5800	.79	.79		.75	2.76	2.83	.94	2.00	1.02	1.61		.43	146.30			
25	1	350	400	20	25	S	24	85	79	27,8	57,2	30	50	36x2	13	106,3	M12x40	BFX90-603-25S-W66 <sup>2</sup>	
		5075	5800	.79	.98		.94	3.35	3.11	1.09	2.25	1.18	1.97		.51	233.86			
32	1-1/4	350	400	25	30	S	25	95	93	31,8	66,6	36	58	42x2	15	159,5	M14x45	BFX90-604-30S-M14-W66	
		5075	5800	.98	1.18		.98	3.74	3.66	1.25	2.62	1.42	2.28		.59	350.90			
38	1-1/2	350	400	32	38	S	26	110	110	36,5	79,3	41	65	52x2	17	240,2	M16x50	BFX90-605-38S-W66	
		5075	5800	1.26	1.50		1.02	4.33	4.33	1.44	3.12	1.61	2.56		.67	528.44			

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

### Materials / Ordering Options / Examples

- \* SAE Single-Part Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, blank (oiled) zinc-plated and thick-film-passivated **BFX90-...-W66**
- \* SAE Single-Part Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **BFX90-...-W5**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **BFX90-...-W66-K**
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **BFX90-...-V-W66-K**
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **BFX90-...-MH-W129-K**

Please always indicate ØB and Series.






**SAE Single-Part Blanking Flange**

BFX-CP

82


**SAE Single-Part Blanking Counterflange**

BAS-CP

83


**SAE Sandwich Plate with Female BSPP Port**

SPL-G04-L

84


**SAE Blindplug (Standard)**

CAG-BP

85


**SAE Blindplug (High)**

CAG-BPH

85


**SAE Sandwich Plate**

SPL

86


**SAE Cover Plate**

CPL

87


**SAE Reducing Flange**

BFX-BAS

88



**Separate Bolt Sets and Sealings**

89

D



## SAE Single-Part Blanking Flange Type BFX-CP ▪ 3000 / 6000 PSI Series

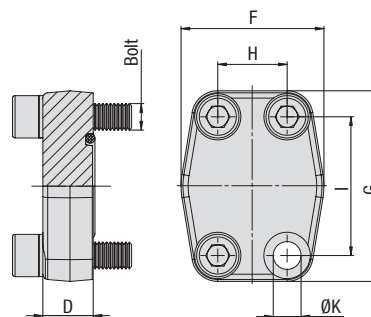

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Weight (kg/lbs) ca. per 100		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	D	F	G	H	I	ØK <sup>3</sup>			Metric <sup>3</sup>	UNC	
13	1/2	350	350	16	47	57	17,5	38,1	8,7	22,3		M8x30	5/16–18 UNC x 1-1/4	BFX-301-CP-W1
		5075	5075	.63	1.85	2.24	.69	1.50	.34	49.06				
19	3/4	350	350	18	50	67	22,3	47,6	10,5	34,1		M10x35	3/8–16 UNC x 1-1/2	BFX-302-CP-W1
		5075	5075	.71	1.97	2.64	.88	1.87	.41	75.02				
25	1	250	315	19	54	72	26,2	52,4	10,5	39,9		M10x35	3/8–16 UNC x 1-1/2	BFX-303-CP-W1
		3625	4568	.75	2.13	2.83	1.03	2.06	.41	87.78				
32	1-1/4	200	250	18	68	82	30,2	58,7	11,5 (13,5)	56,3		M10x40 (M12x40)	7/16–14 UNC x 1-1/2	BFX-304-CP-W1
		2900	3625	.71	2.68	3.23	1.19	2.31	.45 (.53)	123.86				
38	1-1/2	200	200	20	79	96	35,7	69,9	13,5 (14,5)	89,7		M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-305-CP-W1
		2900	2900	.79	3.11	3.78	1.41	2.75	.53 (.57)	197.34				
51	2	160	200	20	88	102	42,9	77,8	13,5 (14,5)	105,7		M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-306-CP-W1
		2320	2900	.79	3.46	4.02	1.69	3.06	.53 (.57)	232.54				
64	2-1/2	100	160	20	101	115	50,8	88,9	13,5 (14,5)	141,5		M12x45 (M14x45)	1/2–13 UNC x 1-3/4	BFX-307-CP-W1
		1450	2320	.79	3.98	4.53	2.00	3.50	.53 (.57)	311.27				
76	3	100	160	24	127	137	61,9	106,4	17	237,7		M16x50	5/8–11 UNC x 2	BFX-308-CP-W1
		1450	2320	.94	5.00	5.39	2.44	4.19	.67	522.94				
89	3-1/2	35	35	22	138	155	69,8	120,7	17	280,5		M16x50	5/8–11 UNC x 2	BFX-309-CP-W1
		508	508	.87	5.43	6.10	2.75	4.75	.67	617.10				
102	4	35	35	25	147	163	77,8	130,2	17	382,6		M16x50	5/8–11 UNC x 2	BFX-310-CP-W1
		508	508	.98	5.79	6.42	3.06	5.13	.67	841.72				
127	5	35	35	25	180	184	92	152,4	17	582,0		M16x55	5/8–11 UNC x 2-1/4	BFX-311-CP-W1
		508	508	.98	7.09	7.24	3.62	6.00	.67	1280.40				

Please see Page 89 for separate Bolt Sets and Sealings.

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)						Weight (kg/lbs) ca. per 100		for Bolts		Ordering Codes
DN	(in)	8.8	10.9 (MH)	D	F	G	H	I	ØK			Metric	UNC	
13	1/2	350	420	16	47	57	18,2	40,5	8,7	22,3		M8x30	5/16–18 UNC x 1-1/4	BFX-601-CP-W1
		5075	6090	.63	1.85	2.24	.72	1.59	.34	49.06				
19	3/4	350	420	19	54	72	23,8	50,8	10,5	44,0		M10x35	3/8–16 UNC x 1-1/2	BFX-602-CP-W1
		5075	6090	.75	2.13	2.83	.94	2.00	.41	96.80				
25	1	350	420	24	68	82	27,8	57,2	13	74,8		M12x45	7/16–14 UNC x 1-3/4	BFX-603-CP-W1 <sup>2</sup>
		5075	6090	.94	2.68	3.23	1.09	2.25	.51	164.56				
32	1-1/4	350	420	27	79	95	31,8	66,6	13,5	117,3		M12x45	1/2–13 UNC x 1-3/4	BFX-604-CP-W1
		5075	6090	1.06	3.11	3.74	1.25	2.62	.53	258.06				
32	1-1/4	350	420	27	79	95	31,8	66,6	15	118,0		M14x45		BFX-604-CP-M14-W1
		5075	6090	1.06	3.11	3.74	1.25	2.62	.59	259.60				
38	1-1/2	350	420	30	88	108	36,5	79,3	17	155,0		M16x55	5/8–11 UNC x 2-1/4	BFX-605-CP-W1
		5075	6090	1.18	3.46	4.25	1.44	3.12	.67	341.00				
51	2	350	420	30	118	137	44,5	96,8	21	267,2		M20x65	3/4–10 UNC x 2-3/4	BFX-606-CP-W1
		5075	6090	1.18	4.65	5.39	1.75	3.81	.83	587.84				
64	2-1/2	350	420	45	152	180	58,7	123,8	26	758,4		M24x80		BFX-607-CP-W1
		5075	6090	1.77	5.98	7.09	2.31	4.87	1.02	1668.48				
76	3	350	420	55	178	208	71,4	152,4	33	1201,8		M30x100		BFX-608-CP-W1
		5075	6090	2.17	7.01	8.19	2.81	6.00	1.30	2643.96				

Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

- \* SAE Single-Part Blanking Flange (without O-ring) made of Steel S355J0 / C45 or equivalent, blank (oiled)
- \* SAE Single-Part Blanking Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX-...-CP-W1**  
**BFX-...-CP-W5**

- \* Kit including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®)
- \* Kit including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®)
- \* Kit including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®)

**BFX-...-CP-W46-K**  
**BFX-...-CP-V-W46-K**  
**BFX-...-CP-MH-W1-K**  
**BFX-...-CP-U-W1-K**


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.

<sup>2</sup> For UNC threaded bolts, use hexagon head bolts only. Please note that these do not belong to our product range.

<sup>3</sup> Alternative options shown in brackets are available on request.





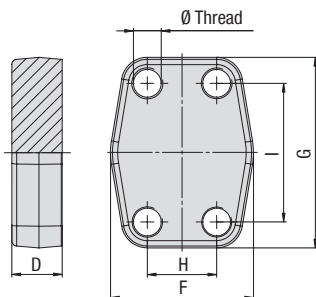

## SAE Single-Part Blanking Counterflange Type BAS-CP • 3000 / 6000 PSI Series



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size DN	(in)	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	for Bolts		Ordering Codes
			8.8	10.9 (MH)	D	F	G	H		Metric <sup>3</sup>	UNC	
13	1/2	350	350	16	47	57	17,5	38,1	25,2	M8	5/16-18 UNC	BAS-301-CP-W1
		5075	5075	.63	1.85	2.24	.69	1.50	55.44			
19	3/4	350	350	18	50	67	22,3	47,6	31,9	M10	3/8-16 UNC	BAS-302-CP-W1
		5075	5075	.71	1.97	2.64	.88	1.87	70.18			
25	1	250	315	19	54	72	26,2	52,4	49,1	M10	3/8-16 UNC	BAS-303-CP-W1
		3625	4568	.75	2.13	2.83	1.03	2.06	108.02			
32	1-1/4	200	250	18	68	82	30,2	58,7	60,0	M10 (M12)	7/16-14 UNC	BAS-304-CP-W1
		2900	3625	.71	2.68	3.23	1.19	2.31	132.00			
38	1-1/2	200	200	20	79	96	35,7	69,9	83,4	M12 (M14)	1/2-13 UNC	BAS-305-CP-W1
		2900	2900	.79	3.11	3.78	1.41	2.75	183.48			
51	2	160	200	20	88	102	42,9	77,8	110,6	M12 (M14)	1/2-13 UNC	BAS-306-CP-W1
		2320	2900	.79	3.46	4.02	1.69	3.06	243.32			
64	2-1/2	100	160	20	101	115	50,8	88,9	145,2	M12 (M14)	1/2-13 UNC	BAS-307-CP-W1
		1450	2320	.79	3.98	4.53	2.00	3.50	319.44			
76	3	100	160	24	127	137	61,9	106,4	252,4	M16	5/8-11 UNC	BAS-308-CP-W1
		1450	2320	.94	5.00	5.39	2.44	4.19	555.28			
89	3-1/2	35	35	22	138	155	69,8	120,7	292,8	M16	5/8-11 UNC	BAS-309-CP-W1
		508	508	.87	5.43	6.10	2.75	4.75	644.16			
102	4	35	35	25	147	163	77,8	130,2	379,6	M16	5/8-11 UNC	BAS-310-CP-W1
		508	508	.98	5.79	6.42	3.06	5.13	835.12			
127	5	35	35	25	180	184	92	152,4	586,3	M16	5/8-11 UNC	BAS-311-CP-W1
		508	508	.98	7.09	7.24	3.62	6.00	1289.86			

Please see Page 89 for separate Bolt Sets and Sealings.

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size DN	(in)	PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	for Bolts		Ordering Codes
			8.8	10.9 (MH)	D	F	G	H		Metric	UNC	
13	1/2	350	420	16	47	57	18,2	40,5	25,6	M8	5/16-18 UNC	BAS-601-CP-W1
		5075	6090	.63	1.85	2.24	.72	1.59	56.32			
19	3/4	350	420	19	54	72	23,8	50,8	49,0	M10	3/8-16 UNC	BAS-602-CP-W1
		5075	6090	.75	2.13	2.83	.94	2.00	107.80			
25	1	350	420	24	68	82	27,8	57,2	79,5	M12	7/16-14 UNC	BAS-603-CP-W1
		5075	6090	.94	2.68	3.23	1.09	2.25	174.90			
32	1-1/4	350	420	27	79	95	31,8	66,6	122,4	M12	1/2-13 UNC	BAS-604-CP-W1
		5075	6090	1.06	3.11	3.74	1.25	2.62	269.28			
32	1-1/4	350	420	27	79	95	31,8	66,6	114,9	M14		BAS-604-CP-M14-W1
		5075	6090	1.06	3.11	3.74	1.25	2.62	252.78			
38	1-1/2	350	420	30	88	108	36,5	79,3	185,1	M16	5/8-11 UNC	BAS-605-CP-W1
		5075	6090	1.18	3.46	4.25	1.44	3.12	407.22			
51	2	350	420	30	118	137	44,5	96,8	266,7	M20	3/4-10 UNC	BAS-606-CP-W1
		5075	6090	1.18	4.65	5.39	1.75	3.81	586.74			
64	2-1/2	350	420	45	152	180	58,7	123,8	774,6	M24		BAS-607-CP-W1
		5075	6090	1.77	5.98	7.09	2.31	4.87	1704.12			
76	3	350	420	55	178	208	71,4	152,4	737,4	M30		BAS-608-CP-W1
		5075	6090	2.17	7.01	8.19	2.81	6.00	1622.28			

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9). The actual maximum working pressure depends on the thickness and the quality of the tube used.


<sup>3</sup> Alternative options shown in brackets are available on request.

### Materials / Ordering Options / Examples


- \* SAE Single-Part Blanking Counterflange made of Steel S355J0 or equivalent, blank (oiled) with Metric tapped holes **BAS-...-CP-W1**
- \* SAE Single-Part Blanking Counterflange made of Stainless Steel V4A – 1.4404 (on request) with Metric tapped holes **BAS-...-CP-W5**
- \* SAE Single-Part Blanking Counterflange made of Steel S355J0 or equivalent, blank (oiled) with size of Metric tapped holes deviating from the standard (e.g. M14) **BAS-...-CP-M14-W1**
- \* SAE Single-Part Blanking Counterflange made of Steel S355J0 or equivalent, blank (oiled) with UNC tapped holes **BAS-...-CP-U-W1**



## SAE Sandwich Plate with Female BSPP Port Type SPL-G04-L ▪ 3000 / 6000 PSI Series

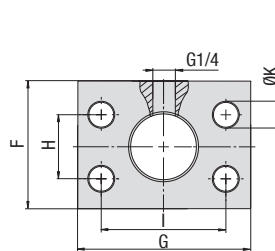

Version A

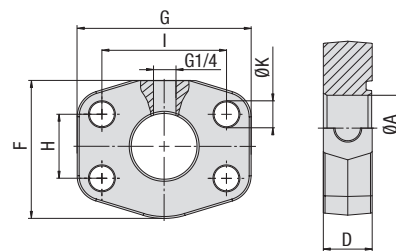

Version B

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)							Version	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	ØK			
13	1/2	350	350	12	24	40	55	17,5	38,1	8,7	A	30,8	SPL-301-G04-L-W1
		5075	5075	.47	.94	1.57	2.17	.69	1.50	.34		67.76	
19	3/4	350	350	19	28	50	65	22,3	47,6	10,5	A	52,3	SPL-302-G04-L-W1
		5075	5075	.75	1.10	1.97	2.56	.88	1.87	.41		115.06	
25	1	250	315	24	25	60	70,6	26,2	52,4	10,5	B	51,2	SPL-303-G04-L-W1
		3625	4568	.94	.98	2.36	2.78	1.03	2.06	.41		112.64	
32	1-1/4	200	250	31	23	68	82	30,2	58,7	11,5	B	56,4	SPL-304-G04-L-W1
		2900	3625	1.22	.91	2.68	3.23	1.19	2.31	.45		124.08	
38	1-1/2	200	200	38	24	79	96	35,7	69,9	13,5	B	86,2	SPL-305-G04-L-W1
		2900	2900	1.50	.94	3.11	3.78	1.41	2.75	.53		189.64	
51	2	160	200	50	24	88	102	42,9	77,8	13,5	B	93,2	SPL-306-G04-L-W1
		2320	2900	1.97	.94	3.46	4.02	1.69	3.06	.53		205.04	

Please see Page 89 for separate Bolt Sets and Sealings.

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> (bar/PSI)		Dimensions (mm/in)							Version	Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	D	F	G	H	I	ØK			
13	1/2	350	420	12	24	40	55	18,2	40,5	8,7	A	29,0	SPL-601-G04-L-W1
		5075	6090	.47	.94	1.57	2.17	.72	1.59	.34		63.80	
19	3/4	350	420	19	25	60	70,6	23,8	50,8	10,5	A	53,1	SPL-602-G04-L-W1
		5075	6090	.75	.98	2.36	2.78	.94	2.00	.41		116.82	
25	1	350	420	25	23	68	82	27,8	57,2	13	B	60,3	SPL-603-G04-L-W1
		5075	6090	.98	.91	2.68	3.23	1.09	2.25	.51		132.66	
32	1-1/4	350	420	31	25	79	95	31,8	66,6	13,5	B	94,2	SPL-604-G04-L-W1
		5075	6090	1.22	.98	3.11	3.74	1.25	2.62	.53		207.24	
32	1-1/4	350	420	31	25	79	95	31,8	66,6	15	B	89,2	SPL-604-G04-L-M14-W1
		5075	6090	1.22	.98	3.11	3.74	1.25	2.62	.59		196.24	
38	1-1/2	350	420	38	28	88	108	36,5	79,3	17	B	147,3	SPL-605-G04-L-W1
		5075	6090	1.50	1.10	3.46	4.25	1.44	3.12	.67		324.06	
51	2	350	420	50	33	118	137	44,5	96,8	21	B	268,6	SPL-606-G04-L-W1
		5075	6090	1.97	1.30	4.65	5.39	1.75	3.81	.83		590.92	

Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

★ SAE Sandwich Plate with Female BSPP Port (without O-ring)  
made of Steel S355J0 / C45 or equivalent, blank (oiled)

**SPL-....-G04-L-W1**


★ SAE Sandwich Plate with Female BSPP Port (without O-ring)  
made of Stainless Steel V4A – 1.4404 (on request)

**SPL-....-G04-L-W5**

Use the female BSPP port of the SAE Sandwich Plate to permanently install a pressure sensor, a hydraulic test coupling or any sort of diagnostic equipment in your hydraulic system. Contact STAUFF for details.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).



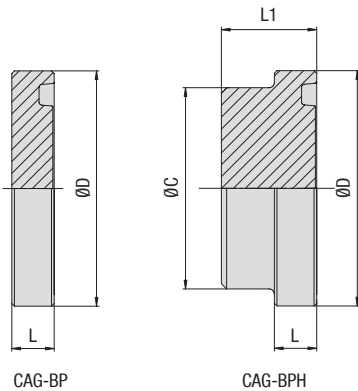

## SAE Blindplug Type CAG-BP (Standard) / CAG-BPH (High) • 3000 / 6000 PSI Series



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN (bar/PSI)		Dimensions (mm/in)				Weight (kg/lbs) ca. per 100 CAG-BP	Weight (kg/lbs) ca. per 100 CAG-BPH	Ordering Codes	Ordering Codes
DN	(in)	BP	BPH	ØC	ØD	L	L1				
13	1/2	210	350	24	30,2	6,8	15	3,1	6,0	CAG-BP-301-W66	CAG-BPH-301-W66
		3045	5075	.94	1.19	.27	.59	6.82	13.20		
19	3/4	210	350	31,5	38,1	6,8	16	5,2	11,0	CAG-BP-302-W66	CAG-BPH-302-W66
		3045	5075	1.24	1.50	.27	.63	11.44	24.20		
25	1	210	315	38	44,45	8	18	8,9	17,9	CAG-BP-303-W66	CAG-BPH-303-W66
		3045	4568	1.50	1.75	.31	.71	19.58	39.38		
32	1-1/4	200	250	43	50,8	8	18	11,2	23,3	CAG-BP-304-W66	CAG-BPH-304-W66
		2900	3625	1.69	2.00	.31	.71	24.64	51.26		
38	1-1/2	160	200	50	60,35	8	18	16,2	32,2	CAG-BP-305-W66	CAG-BPH-305-W66
		2320	2900	1.97	2.38	.31	.71	35.64	70.84		
51	2	160	200	61,8	71,4	9,6	21	27,9	56,1	CAG-BP-306-W66	CAG-BPH-306-W66
		2320	2900	2.43	2.81	.38	.83	61.38	123.42		
64	2-1/2	100	160	73,8	84,1	9,6	21	39,2	78,0	CAG-BP-307-W66	CAG-BPH-307-W66
		1450	2320	2.91	3.31	.38	.83	86.24	171.60		
76	3	100	160	90	101,6	9,6	24	57,8	235,2	CAG-BP-308-W66	CAG-BPH-308-W66
		1450	2320	3.54	4.00	.38	.94	127.16	517.44		
89	3-1/2	35	35	102	114,3	11,3	45	86,2	303,1	CAG-BP-309-W66	CAG-BPH-309-W66
		508	508	4.02	4.50	.44	1.77	189.64	666.82		
102	4	35	35	114	127	11,3	55	107,4	458,8	CAG-BP-310-W66	CAG-BPH-310-W66
		508	508	4.49	5.00	.44	2.17	236.28	1009.28		

Please see Page 89 for separate Bolt Sets and Sealings.

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN (bar/PSI)		Dimensions (mm/in)				Weight (kg/lbs) ca. per 100 CAG-BP	Weight (kg/lbs) ca. per 100 CAG-BPH	Ordering Codes	Ordering Codes
DN	(in)	BP	BPH	ØC	ØD	L	L1				
13	1/2	250	350	24	31,8	7,8	18	4,0	8,4	CAG-BP-601-W66	CAG-BPH-601-W66
		3625	5075	.94	1.25	.31	.71	8.80	18.48		
19	3/4	250	350	32	41,3	8,8	21	8,6	16,3	CAG-BP-602-W66	CAG-BPH-602-W66
		3625	5075	1.26	1.63	.35	.83	18.92	35.86		
25	1	250	350	38	47,6	9,5	26	12,4	26,9	CAG-BP-603-W66	CAG-BPH-603-W66
		3625	5075	1.50	1.87	.37	1.02	27.28	59.18		
32	1-1/4	250	350	43,8	54	10,3	31	17,7	42,2	CAG-BP-604-W66 <sup>2</sup>	CAG-BPH-604-W66 <sup>2</sup>
		3625	5075	1.72	2.13	.41	1.22	38.94	92.84		
38	1-1/2	250	350	50,8	63,5	12,6	34	29,5	64,6	CAG-BP-605-W66	CAG-BPH-605-W66
		3625	5075	2.00	2.50	.50	1.34	64.90	142.12		
51	2	250	350	66,5	79,4	12,6	42	47,1	129,4	CAG-BP-606-W66	CAG-BPH-606-W66
		3625	5075	2.62	3.13	.50	1.65	103.62	284.68		
64	2-1/2	250	350	89	108	21,2	45		265,6		CAG-BPH-607-W66
		3625	5075	3.50	4.25	.83	1.77		584.32		

Please see Page 89 for separate Bolt Sets and Sealings.

<sup>2</sup> According to ISO 6162-2 bolts M12 should be used but because usually bolts M14 are used the description of the complete part must show M14 (e.g. CAG-BP-604-M14-W66-K).


### Materials / Ordering Options / Examples

- \* SAE Blindplug (without O-ring) made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **CAG-BP-...-W66**
- \* SAE Blindplug (without O-ring) made of Stainless Steel V4A – 1.4404 (on request) **CAG-BP-...-W5**
- \* SAE Counterflange Blindplug made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **CSG-BP-...-W66**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-BP-...-W66-K**
- \* Kit with DB including Metric bolts 8.8, spring rings, O-ring made of FKM (Viton®) **CAG-BP-...-V-W66-K**
- \* Kit with DB including Metric bolts 10.9, spring rings, O-ring made of NBR (Buna-N®) **CAG-BP-...-MH-W130-K**
- \* Kit with DB including UNC bolts (Grade 8), spring rings, O-ring made of NBR (Buna-N®) **CAG-BP-...-U-W130-K**
- \* Kit with BM including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®) **CAG-BP-...-BM-W66-K**



## SAE Sandwich Plate

### Type SPL • 3000 / 6000 PSI Series

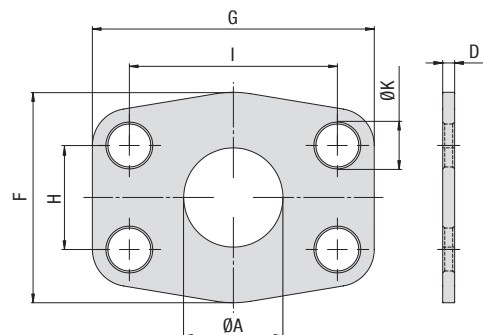

#### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	ØA	D	F	G	H	I	ØK			
13	1/2	13	3	47	57	17,5	38,1	9	4,1		SPL-301-W1
		.51	.12	1.85	2.24	.69	1.50	.35	9.02		
19	3/4	19	3	49	66	22,3	47,6	11	5,1		SPL-302-W1
		.75	.12	1.93	2.60	.88	1.87	.43	11.22		
25	1	25	3	53	71	26,2	52,4	11	5,7		SPL-303-W1
		.98	.12	2.09	2.80	1.03	2.06	.43	12.54		
32	1-1/4	32	3	69	80	30,2	58,7	11,5	8,2		SPL-304-W1
		1.26	.12	2.72	3.15	1.19	2.31	.45	18.04		
38	1-1/2	38	3	77	95	35,7	69,9	13,5	10,5		SPL-305-W1
		1.50	.12	3.03	3.74	1.41	2.75	.53	23.10		
51	2	51	3	89	103	42,9	77,8	13,5	12,3		SPL-306-W1
		2.01	.12	3.50	4.06	1.69	3.06	.53	27.06		
64	2-1/2	63	3	101	116	50,8	88,9	13,5	14,2		SPL-307-W1
		2.48	.12	3.98	4.57	2.00	3.50	.53	31.24		
76	3	73	4	124	136	61,9	106,4	17	27,3		SPL-308-W1
		2.87	.16	4.88	5.35	2.44	4.19	.67	60.06		
89	3-1/2	89	4	136	152	69,8	120,7	17	33,2		SPL-309-W1
		3.50	.16	5.35	5.98	2.75	4.75	.67	73.04		
102	4	99	4	146	162	77,8	130,2	17	36,5		SPL-310-W1
		3.90	.16	5.75	6.38	3.06	5.13	.67	80.30		
127	5	120	4	180	184	92	152,4	17	49,7		SPL-311-W1
		4.72	.16	7.09	7.24	3.62	6.00	.67	109.34		

#### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)


Nominal Size		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	ØA	D	F	G	H	I	ØK			
13	1/2	13	4	47	57	18,2	40,5	9	5,6		SPL-601-W1
		.51	.16	1.85	2.24	.72	1.59	.35	12.32		
19	3/4	17	4	53	71	23,8	50,8	11	8,0		SPL-602-W1
		.67	.16	2.09	2.80	.94	2.00	.43	17.60		
25	1	24	4	66	80	27,8	57,2	13	10,9		SPL-603-W1
		.94	.16	2.60	3.15	1.09	2.25	.51	23.98		
32	1-1/4	31	4	77	94	31,8	66,6	15	14,6		SPL-604-M14-W1
		1.22	.16	3.03	3.70	1.25	2.62	.59	32.12		
38	1-1/2	38	4	89	103	36,5	79,3	17	18,1		SPL-605-W1
		1.50	.16	3.50	4.06	1.44	3.12	.67	39.82		
51	2	51	4	116	135	44,5	96,8	21	29,3		SPL-606-W1
		2.01	.16	4.57	5.31	1.75	3.81	.83	64.46		
64	2-1/2	63	4	150	166	58,7	123,8	25	48,1		SPL-607-W1
		2.48	.16	5.91	6.54	2.31	4.87	.98	105.82		
76	3	73	4	178	208	71,4	152,4	32	71,5		SPL-608-W1
		2.87	.16	7.01	8.19	2.81	6.00	1.26	157.30		

## Materials / Ordering Options / Examples

\* SAE Sandwich Plate made of Steel ST35 or equivalent, blank (oiled)

SPL-...-W1



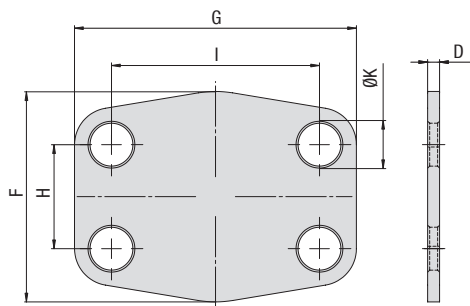

## SAE Cover Plate Type CPL - 3000 / 6000 PSI Series



### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	D	F	G	H	I	ØK		
13	1/2	3	47	57	17,5	38,1	9	4,3	CPL-301-W1
		.12	1.85	2.24	.69	1.50	.35	9.46	
19	3/4	3	49	66	22,3	47,6	11	5,7	CPL-302-W1
		.12	1.93	2.60	.88	1.87	.43	12.54	
25	1	3	53	71	26,2	52,4	11	6,9	CPL-303-W1
		.12	2.09	2.80	1.03	2.06	.43	15.18	
32	1-1/4	3	69	80	30,2	58,7	11,5	9,7	CPL-304-W1
		.12	2.72	3.15	1.19	2.31	.45	21.34	
38	1-1/2	3	77	95	35,7	69,9	13,5	12,8	CPL-305-W1
		.12	3.03	3.74	1.41	2.75	.53	28.16	
51	2	3	89	103	42,9	77,8	13,5	16,5	CPL-306-W1
		.12	3.50	4.06	1.69	3.06	.53	36.30	
64	2-1/2	3	101	116	50,8	88,9	13,5	22,3	CPL-307-W1
		.12	3.98	4.57	2.00	3.50	.53	49.06	
76	3	4	124	136	61,9	106,4	17	40,3	CPL-308-W1
		.16	4.88	5.35	2.44	4.19	.67	88.66	
89	3-1/2	4	136	152	69,8	120,7	17	53,3	CPL-309-W1
		.16	5.35	5.98	2.75	4.75	.67	117.26	
102	4	4	146	162	77,8	130,2	17	61,1	CPL-310-W1
		.16	5.75	6.38	3.06	5.13	.67	134.42	
127	5	4	180	184	92	152,4	17	85,5	CPL-311-W1
		.16	7.09	7.24	3.62	6.00	.67	188.10	

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	Ordering Codes
DN	(in)	D	F	G	H	I	ØK		
13	1/2	4	47	57	18,2	40,5	9	6,0	CPL-601-W1
		.16	1.85	2.24	.72	1.59	.35	13.20	
19	3/4	4	53	71	23,8	50,8	11	9,0	CPL-602-W1
		.16	2.09	2.80	.94	2.00	.43	19.80	
25	1	4	66	80	27,8	57,2	13	12,8	CPL-603-W1
		.16	2.60	3.15	1.09	2.25	.51	28.16	
32	1-1/4	4	77	94	31,8	66,6	15	16,7	CPL-604-M14-W1
		.16	3.03	3.70	1.25	2.62	.59	36.74	
38	1-1/2	4	89	103	36,5	79,3	17	21,8	CPL-605-W1
		.16	3.50	4.06	1.44	3.12	.67	47.96	
51	2	4	116	135	44,5	96,8	21	36,6	CPL-606-W1
		.16	4.57	5.31	1.75	3.81	.83	80.52	
64	2-1/2	4	150	166	58,7	123,8	25	57,6	CPL-607-W1
		.16	5.91	6.54	2.31	4.87	.98	126.72	
76	3	4	178	208	71,4	152,4	32	85,6	CPL-608-W1
		.16	7.01	8.19	2.81	6.00	1.26	188.32	

## Materials / Ordering Options / Examples


\* SAE Cover Plate made of Steel ST35 or equivalent, blank (oiled)

CPL-...-W1





## SAE Reducing Flange Type BFX-...-BAS-... ▪ 3000 / 6000 PSI Series

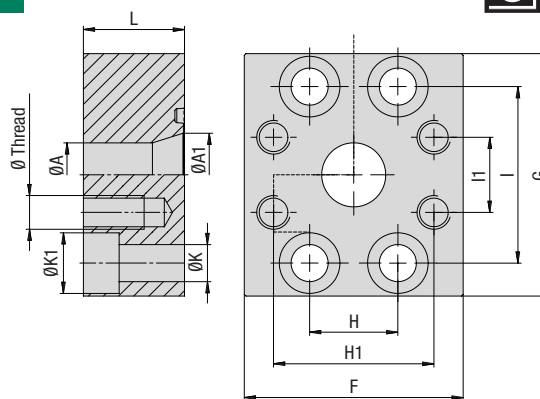

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		Dimensions (mm/in)											Weight ( <sup>kg</sup> /lbs) ca.	for Bolts	Ø Thread	Ordering Codes
DN	(in)	ØA	ØA1	F	G	H	H1	I	I1	L	ØK	ØK1	per 100	Metric	Metric	
25	1	19	25	65	72	26,2	47,6	52,4	22,3	30	11	18	83,0	M10x30	M10	BFX-303-BAS-302-W1
		.75	.98	2.56	2.83	1.03	1.87	2.06	.88	1.18	.43	.71	182.60			
32	1-1/4	25	32	70	80	30,2	52,4	58,7	26,2	30	11	18	99,0	M10x30	M10	BFX-304-BAS-303-W1
		.98	1.26	2.76	3.15	1.19	2.06	2.31	1.03	1.18	.43	.71	217.80			
38	1-1/2	32	38	80	95	35,7	58,7	69,9	30,2	30	13,5	20	133,0	M12x35	M10	BFX-305-BAS-304-W1
		1.26	1.50	3.15	3.74	1.41	2.31	2.75	1.19	1.18	.53	.79	292.60			
51	2	32	51	95	100	42,9	58,7	77,8	30,2	30	13,5	20	165,6	M12x35	M10	BFX-306-BAS-304-W1
		1.26	2.01	3.74	3.94	1.69	2.31	3.06	1.19	1.18	.53	.79	364.32			
51	2	38	46	95	120	42,9	69,9	77,8	35,7	30	13,5	20	166,0	M12x35	M12	BFX-306-BAS-305-W1
		1.50	1.81	3.74	4.72	1.69	2.75	3.06	1.41	1.18	.53	.79	365.20			
64	2-1/2	38	62	109	114	50,8	69,9	88,9	35,7	35	13,5	20	257,0	M12x40	M12	BFX-307-BAS-305-W1
		1.50	2.44	4.29	4.49	2.00	2.75	3.50	1.41	1.38	.53	.79	565.40			
64	2-1/2	51	64	109	114	50,8	77,8	88,9	42,9	35	13,5	20	244,0	M12x40	M12	BFX-307-BAS-306-W1
		2.01	2.52	4.29	4.49	2.00	3.06	3.50	1.69	1.38	.53	.79	536.80			
76	3	51	76	114	140	61,9	77,8	106,4	42,9	40	17,5	26	367,4	M16x50	M12	BFX-308-BAS-306-W1
		2.01	2.99	4.49	5.51	2.44	3.06	4.19	1.69	1.57	.69	1.02	808.28			
76	3	64	76	114	140	61,9	88,9	106,4	50,8	40	17,5	26	367,0	M16x50	M12	BFX-308-BAS-307-W1
		2.52	2.99	4.49	5.51	2.44	3.50	4.19	2.00	1.57	.69	1.02	807.40			

Please see Page 89 for separate Bolt Sets and Sealings.

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		Dimensions (mm/in)											Weight ( <sup>kg</sup> /lbs) ca.	for Bolts	Ø Thread	Ordering Codes
DN	(in)	ØA	ØA1	F	G	H	H1	I	I1	L	ØK	ØK1	per 100	Metric	Metric	
19	3/4	19	19	70	70	23,8	50,8	50,8	23,8	28	11	18	83,0	M10x35	M10	BFX-602-BAS-602-W1
		.75	.75	2.76	2.76	.94	2.00	2.00	.94	1.10	.43	.71	182.60			
25	1	19	23	70	81	27,8	50,8	57,2	23,8	30	13,5	20	100,9	M12x40	M10	BFX-603-BAS-602-W1
		.75	.91	2.76	3.19	1.09	2.00	2.25	.94	1.18	.53	.79	221.98			
25	1	25	25	75	80	27,8	57,2	57,2	27,8	36	13,5	20	125,0	M12x45	M12	BFX-603-BAS-603-W1
		.98	.98	2.95	3.15	1.09	2.25	2.25	1.09	1.42	.53	.79	275.00			
32	1-1/4	23	30	83	100	31,8	57,2	66,6	27,8	25	15	22	120,7	M14x40	M12	BFX-604-M14-BAS-603-W1
		.91	1.18	3.27	3.94	1.25	2.25	2.62	1.09	.98	.59	.87	265.54			
32	1-1/4	31	31	90	100	31,8	66,6	66,6	31,8	35	15	22	195,0	M14x50	M14	BFX-604-M14-BAS-604-M14-W1
		1.22	1.22	3.54	3.94	1.25	2.62	2.62	1.25	1.38	.59	.87	429.00			
38	1-1/2	32	40	95	113	36,5	66,6	79,3	31,8	48	17,5	26	236,2	M16x55	M14	BFX-605-BAS-604-M14-W1
		1.26	1.57	3.74	4.45	1.44	2.62	3.12	1.25	1.89	.69	1.02	519.64			
38	1-1/2	38	38	113	113	36,5	79,3	79,3	36,5	50	17,5	26	382,2	M16x55	M16	BFX-605-BAS-605-W1
		1.50	1.50	4.45	4.45	1.44	3.12	3.12	1.44	1.97	.69	1.02	840.84			
51	2	38	49	125	140	44,5	79,3	96,8	36,5	60	22	33	334,9	M20x100	M16	BFX-606-BAS-605-W1
		1.50	1.93	4.92	5.51	1.75	3.12	3.81	1.44	2.36	.87	1.30	736.78			

Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

- \* SAE Reducing Flange (without O-ring) made of Steel S355J0 or equivalent, blank (oiled)
- \* SAE Reducing Flange (without O-ring) made of Stainless Steel V4A – 1.4404 (on request)

**BFX-...-BAS-...-W1**  
**BFX-...-BAS-...-W5**



## Separate Bolt Sets and Sealings

Please see Page 89 for separate Bolt Sets and Sealings.

### Bolt Sets

Ordering of bolt sets (consisting of 4 hexagon socket head cap bolts and 4 spring rings) by using the ordering codes as stated below:

Metric bolts (property class 8.8)	<b>KIT-BFX-IS-M12x50-ISO4762-8.8-W66</b>	(Steel, zinc-plated and thick-film-passivated)
Metric bolts (property class 10.9)	<b>KIT-BFX-IS-M12x50-ISO4762-10.9-W1</b>	(Steel, blank and oiled)
UNC bolts (Grade 8)	<b>KIT-BFX-IS-U5/16-18X1-1/4-AB18.3-GR8-W1</b>	(Steel, blank and oiled)

Thread diameters, dimensions (see corresponding catalogue pages) and property classes / grades have to be chosen to meet your specific requirements.  
Replace material code W66 / W1 with W5 for bolts made of Stainless Steel V4A – 1.4571.

Metric bolts	ISO 4762	Spring rings for Metric bolts	DIN 7980
UNC bolts	ANSI B 18.3	Spring rings for UNC bolts	ANSI B 18.21.1

### O Rings

#### 3000 PSI Standard Pressure Series (according to ISO 6162-1)

Nominal Size DN	(in)	Internal Diameter x Cross-Section SAE J515 (STAUFF Standard)	Nominal Size ISO 3601-1
13	1/2	18.64 x 3.53	-210
19	3/4	24.99 x 3.53	-214
25	1	32.92 x 3.53	-219
32	1-1/4	37.69 x 3.53	-222
38	1-1/2	47.22 x 3.53	-225
51	2	56.74 x 3.53	-228
64	2-1/2	69.44 x 3.53	-232
76	3	85.32 x 3.53	-237
89	3-1/2	98.02 x 3.53	-241
102	4	110.72 x 3.53	-245
127	5	136.12 x 3.53	-253

#### 6000 PSI High Pressure Series (according to ISO 6162-2)

Nominal Size DN	(in)	Internal Diameter x Cross-Section SAE J515 (STAUFF Standard)	Nominal Size ISO 3601-1
13	1/2	18.64 x 3.53	-210
19	3/4	24.99 x 3.53	-214
25	1	32.92 x 3.53	-219
32	1-1/4	37.69 x 3.53	-222
38	1-1/2	47.22 x 3.53	-225
51	2	56.74 x 3.53	-228
64	2-1/2	69.44 x 3.53	-232
76	3	85.32 x 3.53	-237

#### Ordering Codes

**\*O-RING-\*18.64X\*3.53-\*B90**

* O-Ring	<b>O-RING</b>
* Internal Diameter (in mm)	<b>18.64</b>
* Cross-Section (in mm)	<b>3.53</b>
* Seal Material	<b>-B90</b>
	NBR (Buna-N®)
	Hardness: 90 Shore
	Temperature Range:
	-30 °C ... +100 °C / -22 °F ... +212 °F
	FKM (Viton®)
	<b>-V90</b>
	Hardness: 85 ... 90 Shore
	Temperature Range:
	-20 °C ... +200 °C / -4 °F ... +392 °F

Please contact STAUFF for alternative materials.







**SAE Block T-Connection (Adaptor Style)**

BF-T

92



**SAE Block T-Connection (Connector Style)**

BC-T

93



**SAE Block L-Connection (Adaptor Style)**

BF-L

94



**SAE Block L-Connection (Connector Style)**

BC-L

95



**SAE Block L-Connection Reduction (Adaptor Style)**


BF-L

96

E



## SAE Block T-Connection (Adaptor Style) Type BF-T ▪ 6000 PSI Series

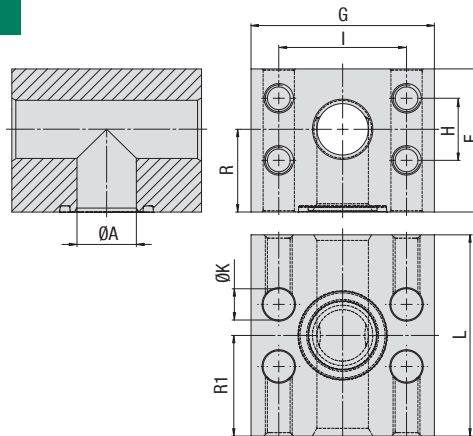

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sup>in</sup> )									Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Ø Thread Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1	ØK			
19	3/4	350	420	19	55	72	23,8	50,8	72	32	36	11	176,0	M10	BF-T-602-W66
		5075	6090	.75	2.17	2.83	.94	2.00	2.83	1.26	1.42	.43	387.20		
25	1	350	420	23	64	82	27,8	57,2	90	37	45	13,5	283,0	M12	BF-T-603-W66
		5075	6090	.91	2.52	3.23	1.09	2.25	3.54	1.46	1.77	.53	622.60		
32	1-1/4	350	420	30	72	100	31,8	66,6	100	41	50	15,5	404,7	M14	BF-T-604-M14-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	3.94	1.61	1.97	.61	890.34		
38	1-1/2	350	420	38	89	114	36,5	79,3	110	50	55	17,5	645,1	M16	BF-T-605-W66
		5075	6090	1.50	3.50	4.49	1.44	3.12	4.33	1.97	2.17	.69	1419.22		
51	2	350	420	50	107	133	44,5	96,8	135	64	67,5	22	1027,5	M20	BF-T-606-W66
		5075	6090	1.97	4.21	5.24	1.75	3.81	5.31	2.52	2.66	.87	2260.50		

Please see Page 89 for separate Bolt Sets and Sealings.


### Materials / Ordering Options / Examples

- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BF-T-...-W66**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, blank (oiled) (on request) **BF-T-...-W1**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BF-T-...-W3**
- \* SAE Flange Block made of Stainless Steel V4A – 1.4404 (on request) **BF-T-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BF-T-...-M14-W66**


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).





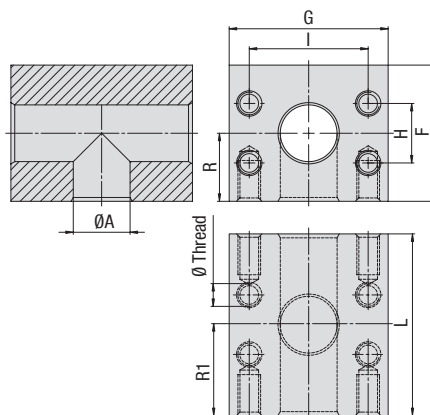

## SAE Block T-Connection (Connector Style) Type BC-T • 3000 / 6000 PSI Series



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> Bolts (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100	Ø Thread Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1			
13	1/2	350	350	13	50	55	17,5	38,1	70	25	35	138,3	M8	BC-T-301-W66
		5075	5075	.51	1.97	2.17	.69	1.50	2.76	.98	1.38	304.26		
19	3/4	350	350	19	60	65	22,3	47,6	75	30	37,5	188,9	M10	BC-T-302-W66
		5075	5075	.75	2.36	2.56	.88	1.87	2.95	1.18	1.48	415.58		
25	1	250	315	24	65	72	26,2	52,4	80	33	40	245,4	M10	BC-T-303-W66
		3625	4568	.94	2.56	2.83	1.03	2.06	3.15	1.30	1.57	539.88		
32	1-1/4	200	250	32	80	82	30,2	58,7	90	39	45	368,7	M10	BC-T-304-W66
		2900	3625	1.26	3.15	3.23	1.19	2.31	3.54	1.54	1.77	811.14		
38	1-1/2	200	200	38	92	100	35,7	69,9	110	51	55	641,5	M12	BC-T-305-W66
		2900	2900	1.50	3.62	3.94	1.41	2.75	4.33	2.01	2.17	1411.30		
51	2	160	200	51	87	102	42,9	77,8	120	51	60	564,9	M12	BC-T-306-W66
		2320	2900	2.01	3.43	4.02	1.69	3.06	4.72	2.01	2.36	1242.69		
64	2-1/2	100	160	62	120	115	50,8	88,9	160	60	80	1269,8	M12	BC-T-307-W66
		1450	2320	2.44	4.72	4.53	2.00	3.50	6.30	2.36	3.15	2793.56		
76	3	100	138	73	135	135	61,9	106,4	160	67,5	80	1596,1	M16	BC-T-308-W66
		1450	2001	2.87	5.31	5.31	2.44	4.19	6.30	2.66	3.15	3511.42		
89	3-1/2	35	35	89	145	150	69,9	120,7	160	72,5	80	1734,9	M16	BC-T-309-W66
		508	508	3.50	5.71	5.91	2.75	4.75	6.30	2.85	3.15	3816.78		

Please see Page 89 for separate Bolt Sets and Sealings.

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> Bolts (bar/PSI)		Dimensions (mm/in)								Weight (kg/lbs) ca. per 100	Ø Thread Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1			
13	1/2	350	420	13	50	60	18,2	40,5	90	25	45	194,2	M8	BC-T-601-W66
		5075	6090	.51	1.97	2.36	.72	1.59	3.54	.98	1.77	427.24		
19	3/4	350	420	19	55	72	23,8	50,8	72	32	36	192,9	M10	BC-T-602-W66
		5075	6090	.75	2.17	2.83	.94	2.00	2.83	1.26	1.42	424.38		
25	1	350	420	23	64	82	27,8	57,2	90	37	45	310,4	M12	BC-T-603-W66
		5075	6090	.91	2.52	3.23	1.09	2.25	3.54	1.46	1.77	682.88		
32	1-1/4	350	420	30	72	100	31,8	66,6	100	41	50	300,6	M12	BC-T-604-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	3.94	1.61	1.97	661.32		
32	1-1/4	350	420	30	72	100	31,8	66,6	100	41	50	300,6	M14	BC-T-604-M14-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	3.94	1.61	1.97	661.32		
38	1-1/2	350	420	38	89	114	36,5	79,3	110	50	55	688,9	M16	BC-T-605-W66
		5075	6090	1.50	3.50	4.49	1.44	3.12	4.33	1.97	2.17	1515.58		
51	2	350	420	50	107	133	44,5	96,8	135	64	67,5	1113,7	M20	BC-T-606-W66
		5075	6090	1.97	4.21	5.24	1.75	3.81	5.31	2.52	2.66	2450.14		
64	2-1/2	350	420	62	155	180	58,8	123,8	180	77,5	90	1112,3	M24	BC-T-607-W1
		5075	6090	2.44	6.10	7.09	2.31	4.87	7.09	3.05	3.54	2447.06		

Please see Page 89 for separate Bolt Sets and Sealings.


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).

### Materials / Ordering Options / Examples

- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BC-T-...-W66**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, blank (oiled) (on request) **BC-T-...-W1**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BC-T-...-W3**
- \* SAE Flange Block made of Stainless Steel V4A – 1.4404 (on request) **BC-T-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BC-T-...-M14-W66**



## SAE Block L-Connection (Adaptor Style) Type BF-L ▪ 3000 / 6000 PSI Series

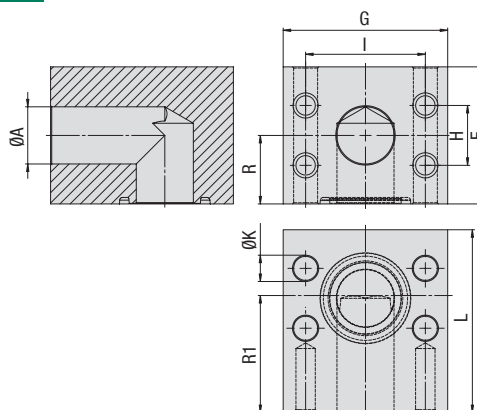

### 3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sup>in</sup> )									Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Ø Thread	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1	ØK	Metric		
13	1/2	350	350	13	50	55	17,5	38,1	55	25	35	9	103,3	M8	BF-L-301-W66
		5075	5075	.51	1.97	2.17	.69	1.50	2.17	.98	1.38	.35	227.26		
20	3/4	350	350	19	60	65	22,3	47,6	60	30	40	11	146,7	M10	BF-L-302-W66
		5075	5075	.75	2.36	2.56	.88	1.87	2.36	1.18	1.57	.43	322.74		
25	1	250	315	24	65	72	26,2	52,4	65	33	40	11	189,7	M10	BF-L-303-W66
		3625	4568	.94	2.56	2.83	1.03	2.06	2.56	1.30	1.57	.43	417.34		
32	1-1/4	200	200	32	80	82	30,2	58,7	82	39	38	11	349,3	M10	BF-L-304-W66
		2900	2900	1.26	3.15	3.23	1.19	2.31	3.23	1.54	1.50	.43	768.46		
38	1-1/2	160	200	38	92	100	35,7	69,9	92	51	59	13,5	510,9	M12	BF-L-305-W66
		2320	2900	1.50	3.62	3.94	1.41	2.75	3.62	2.01	2.32	.53	1123.98		
51	2	100	160	51	87	102	42,9	77,8	85	51	48	13,5	376,0	M12	BF-L-306-W66
		1450	2320	2.01	3.43	4.02	1.69	3.06	3.35	2.01	1.89	.53	827.20		
64	2-1/2	100	160	62	120	110	50,8	88,9	110	60	65	13,5	842,5	M12	BF-L-307-W66
		1450	2320	2.44	4.72	4.33	2.00	3.50	4.33	2.36	2.56	.53	1853.50		
76	3	100	138	73	135	135	61,9	106,4	150	67,5	90	17,5	1481,7	M16	BF-L-308-W66
		1450	2001	2.87	5.31	5.31	2.44	4.19	5.91	2.66	3.54	.69	3259.74		
89	3-1/2	35	35	89	145	150	69,9	120,7	145	72,5	75	17,5	1653,6	M16	BF-L-309-W66
		508	508	3.50	5.71	5.91	2.75	4.75	5.71	2.85	2.95	.69	3637.92		

Please see Page 89 for separate Bolt Sets and Sealings.

### 6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sup>in</sup> )									Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Ø Thread	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1	ØK	Metric		
13	1/2	350	420	13	50	60	18,2	40,5	60	25	40	9	122,9	M8	BF-L-601-W66
		5075	6090	.51	1.97	2.36	.72	1.59	2.36	.98	1.57	.35	270.38		
19	3/4	350	420	19	55	72	23,8	50,8	60	32	36	11	149,5	M10	BF-L-602-W66
		5075	6090	.75	2.17	2.83	.94	2.00	2.36	1.26	1.42	.43	328.90		
25	1	350	420	23	64	82	27,8	57,2	68	37	40	13,5	210,3	M12	BF-L-603-W66
		5075	6090	.91	2.52	3.23	1.09	2.25	2.68	1.46	1.57	.53	462.66		
32	1-1/4	350	420	30	72	100	31,8	66,6	76	41	46	13,5	348,5	M12	BF-L-604-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	2.99	1.61	1.81	.53	766.70		
32	1-1/4	350	420	30	72	100	31,8	66,6	76	41	46	15,5	322,9	M14	BF-L-604-M14-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	2.99	1.61	1.81	.61	710.38		
38	1-1/2	350	420	38	89	114	36,5	79,3	86	50	52	17,5	494,1	M16	BF-L-605-W66
		5075	6090	1.50	3.50	4.49	1.44	3.12	3.39	1.97	2.05	.69	1086.91		
51	2	350	420	50	107	133	44,5	96,8	107	64	70	22	816,8	M20	BF-L-606-W66
		5075	6090	1.97	4.21	5.24	1.75	3.81	4.21	2.52	2.76	.87	1796.96		
64	2-1/2	350	420	62	155	180	58,8	123,8	160	77,5	90	26	829,6	M24	BF-L-607-W1
		5075	6090	2.44	6.10	7.09	2.31	4.87	6.30	3.05	3.54	1.02	1825.12		


Please see Page 89 for separate Bolt Sets and Sealings.

## Materials / Ordering Options / Examples

- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BF-L-...-W66**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, blank (oiled) (on request) **BF-L-...-W1**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BF-L-...-W3**
- \* SAE Flange Block made of Stainless Steel V4A – 1.4404 (on request) **BF-L-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BF-L-...-M14-W66**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).



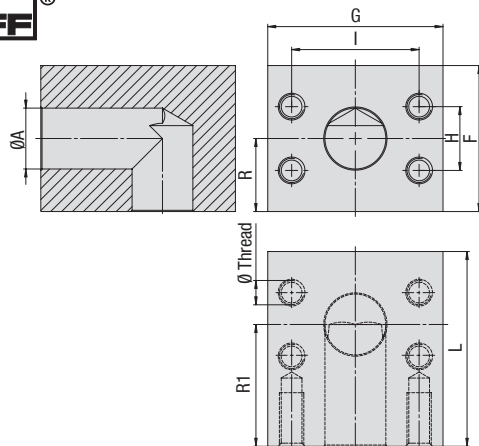

## SAE Block L-Connection (Connector Style) Type BC-L • 3000 / 6000 PSI Series



3000 PSI Standard Pressure Series (based on ISO 6162-1:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sup>in</sup> )								Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Ø Thread Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1			
13	1/2	350	350	13	50	55	17,5	38,1	55	25	35	109,1	M8	BC-L-301-W66
		5075	5075	.51	1.97	2.17	.69	1.50	2.17	.98	1.38	240.02		
20	3/4	350	350	19	60	65	22,3	47,6	60	30	40	157,9	M10	BC-L-302-W66
		5075	5075	.75	2.36	2.56	.88	1.87	2.36	1.18	1.57	347.38		
25	1	250	315	24	65	72	26,2	52,4	65	33	40	204,3	M10	BC-L-303-W66
		3625	4568	.94	2.56	2.83	1.03	2.06	2.56	1.30	1.57	449.46		
32	1-1/4	200	200	32	80	82	30,2	58,7	82	39	38	366,7	M10	BC-L-304-W66
		2900	2900	1.26	3.15	3.23	1.19	2.31	3.23	1.54	1.50	806.74		
38	1-1/2	160	200	38	92	100	35,7	69,9	92	51	59	547,1	M12	BC-L-305-W66
		2320	2900	1.50	3.62	3.94	1.41	2.75	3.62	2.01	2.32	1203.62		
51	2	100	160	51	87	102	42,9	77,8	85	51	48	403,4	M12	BC-L-306-W66
		1450	2320	2.01	3.43	4.02	1.69	3.06	3.35	2.01	1.89	887.48		
64	2-1/2	100	160	62	120	110	50,8	88,9	110	60	65	966,5	M12	BC-L-307-W66
		1450	2320	2.44	4.72	4.33	2.00	3.50	4.33	2.36	2.56	2126.30		
76	3	100	138	73	135	135	61,9	106,4	150	67,5	90	1629,3	M16	BC-L-308-W66
		1450	2001	2.87	5.31	5.31	2.44	4.19	5.91	2.66	3.54	3584.46		
89	3-1/2	35	35	89	145	150	69,9	120,7	145	72,5	75	1744,7	M16	BC-L-309-W66
		508	508	3.50	5.71	5.91	2.75	4.75	5.71	2.85	2.95	3838.34		

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> /PSI)		Dimensions ( <sup>mm</sup> / <sup>in</sup> )								Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Ø Thread Metric	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	F	G	H	I	L	R	R1			
13	1/2	350	420	13	50	60	18,2	40,5	60	25	40	130,0	M8	BC-L-601-W66
		5075	6090	.51	1.97	2.36	.72	1.59	2.36	.98	1.57	286.00		
19	3/4	350	420	19	55	72	23,8	50,8	60	32	36	161,9	M10	BC-L-602-W66
		5075	6090	.75	2.17	2.83	.94	2.00	2.36	1.26	1.42	356.18		
25	1	350	420	23	64	82	27,8	57,2	68	37	40	238,9	M12	BC-L-603-W66
		5075	6090	.91	2.52	3.23	1.09	2.25	2.68	1.46	1.57	525.58		
32	1-1/4	350	420	30	72	100	31,8	66,6	76	41	46	233,4	M12	BC-L-604-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	2.99	1.61	1.81	513.48		
32	1-1/4	350	420	30	72	100	31,8	66,6	76	41	46	233,4	M14	BC-L-604-M14-W66
		5075	6090	1.18	2.83	3.94	1.25	2.62	2.99	1.61	1.81	513.48		
38	1-1/2	350	420	38	89	114	36,5	79,3	86	50	52	558,1	M16	BC-L-605-W66
		5075	6090	1.50	3.50	4.49	1.44	3.12	3.39	1.97	2.05	1227.82		
51	2	350	420	50	107	133	44,5	96,8	107	64	70	894,4	M20	BC-L-606-W66
		5075	6090	1.97	4.21	5.24	1.75	3.81	4.21	2.52	2.76	1967.68		
64	2-1/2	350	420	62	155	180	58,8	123,8	160	77,5	90	911,1	M24	BC-L-607-W1
		5075	6090	2.44	6.10	7.09	2.31	4.87	6.30	3.05	3.54	2004.42		


<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).

### Materials / Ordering Options / Examples

- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BC-L-...-W66**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, blank (oiled) (on request) **BC-L-...-W1**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BC-L-...-W3**
- \* SAE Flange Block made of Stainless Steel V4A – 1.4404 (on request) **BC-L-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BC-L-...-M14-W66**



## SAE Block L-Connection Reduction (Adaptor Style) Type BF-L ▪ 6000 PSI Series

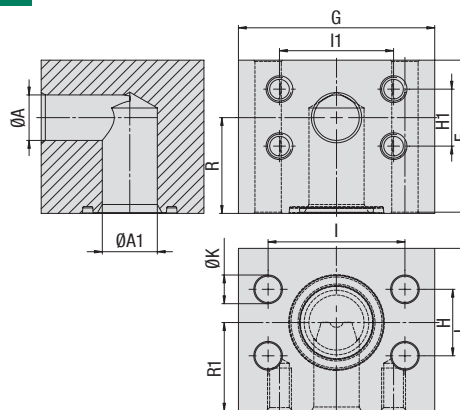

6000 PSI High Pressure Series (based on ISO 6162-2:2002)

Nominal Size		PN <sup>1</sup> Bolts ( <sup>bar</sup> / <sub>PSI</sub> )		Dimensions ( <sup>mm</sup> / <sub>in</sub> )														Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca. per 100	Ø Thread	Ordering Codes
DN	(in)	8.8	10.9 (MH)	ØA	ØA1	F	G	H	H1	I1	I	L	R	R1	ØK	Metric				
25 - 19	1 - 3/4	350	420	19	23	64	82	27,8	23,8	50,8	57,2	68	37	40	14	223,0	M10	BF-L-603-602-W66		
		5075	6090	.75	.91	2.52	3.23	1.09	.94	2.00	2.25	2.68	1.46	1.57	.55	490.60				
32 - 19	1-1/4 - 3/4	350	420	19	30	72	100	31,8	23,8	50,8	66,6	76	41	46	16	345,4	M10	BF-L-604-M14-602-W66		
		5075	6090	.75	1.18	2.83	3.94	1.25	.94	2.00	2.62	2.99	1.61	1.81	.63	759.88				
32 - 25	1-1/4 - 1	350	420	23	30	72	100	31,8	27,8	57,2	66,6	76	41	46	16	333,2	M12	BF-L-604-M14-603-W66		
		5075	6090	.91	1.18	2.83	3.94	1.25	1.09	2.25	2.62	2.99	1.61	1.81	.63	733.04				
38 - 32	1-1/2 - 1-1/4	350	420	30	38	89	114	36,5	31,8	66,6	79,3	86	50	52	18	541,3	M14	BF-L-605-604-M14-W66		
		5075	6090	1.18	1.50	3.50	4.49	1.44	1.25	2.62	3.12	3.39	1.97	2.05	.71	1190.86				
51 - 38	2 - 1-1/2	350	420	38	50	107	133	44,5	36,5	79,3	96,8	107	64	70	22	893,5	M16	BF-L-606-605-W66		
		5075	6090	1.50	1.97	4.21	5.24	1.75	1.44	3.12	3.81	4.21	2.52	2.76	.87	1965.70				


Please see Page 89 for separate Bolt Sets and Sealings.

### Materials / Ordering Options / Examples


- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc-plated and thick-film-passivated **BF-L-...-...-W66**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, blank (oiled) (on request) **BF-L-...-...-W1**
- \* SAE Flange Block made of Steel S355J0 / C45 or equivalent, zinc/nickel-plated (on request) **BF-L-...-...-W3**
- \* SAE Flange Block made of Stainless Steel V4A – 1.4404 (on request) **BF-L-...-...-W5**
- \* Size of Metric tapped holes deviating from the standard (e.g. M14) **BF-L-...-M14-...-W66**
- \* Size of through holes deviating from the standard (e.g. for bolts M14) **BF-L-...-...-M14-W66**

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself and depends on the bolts used (Grade 8.8 / 10.9).



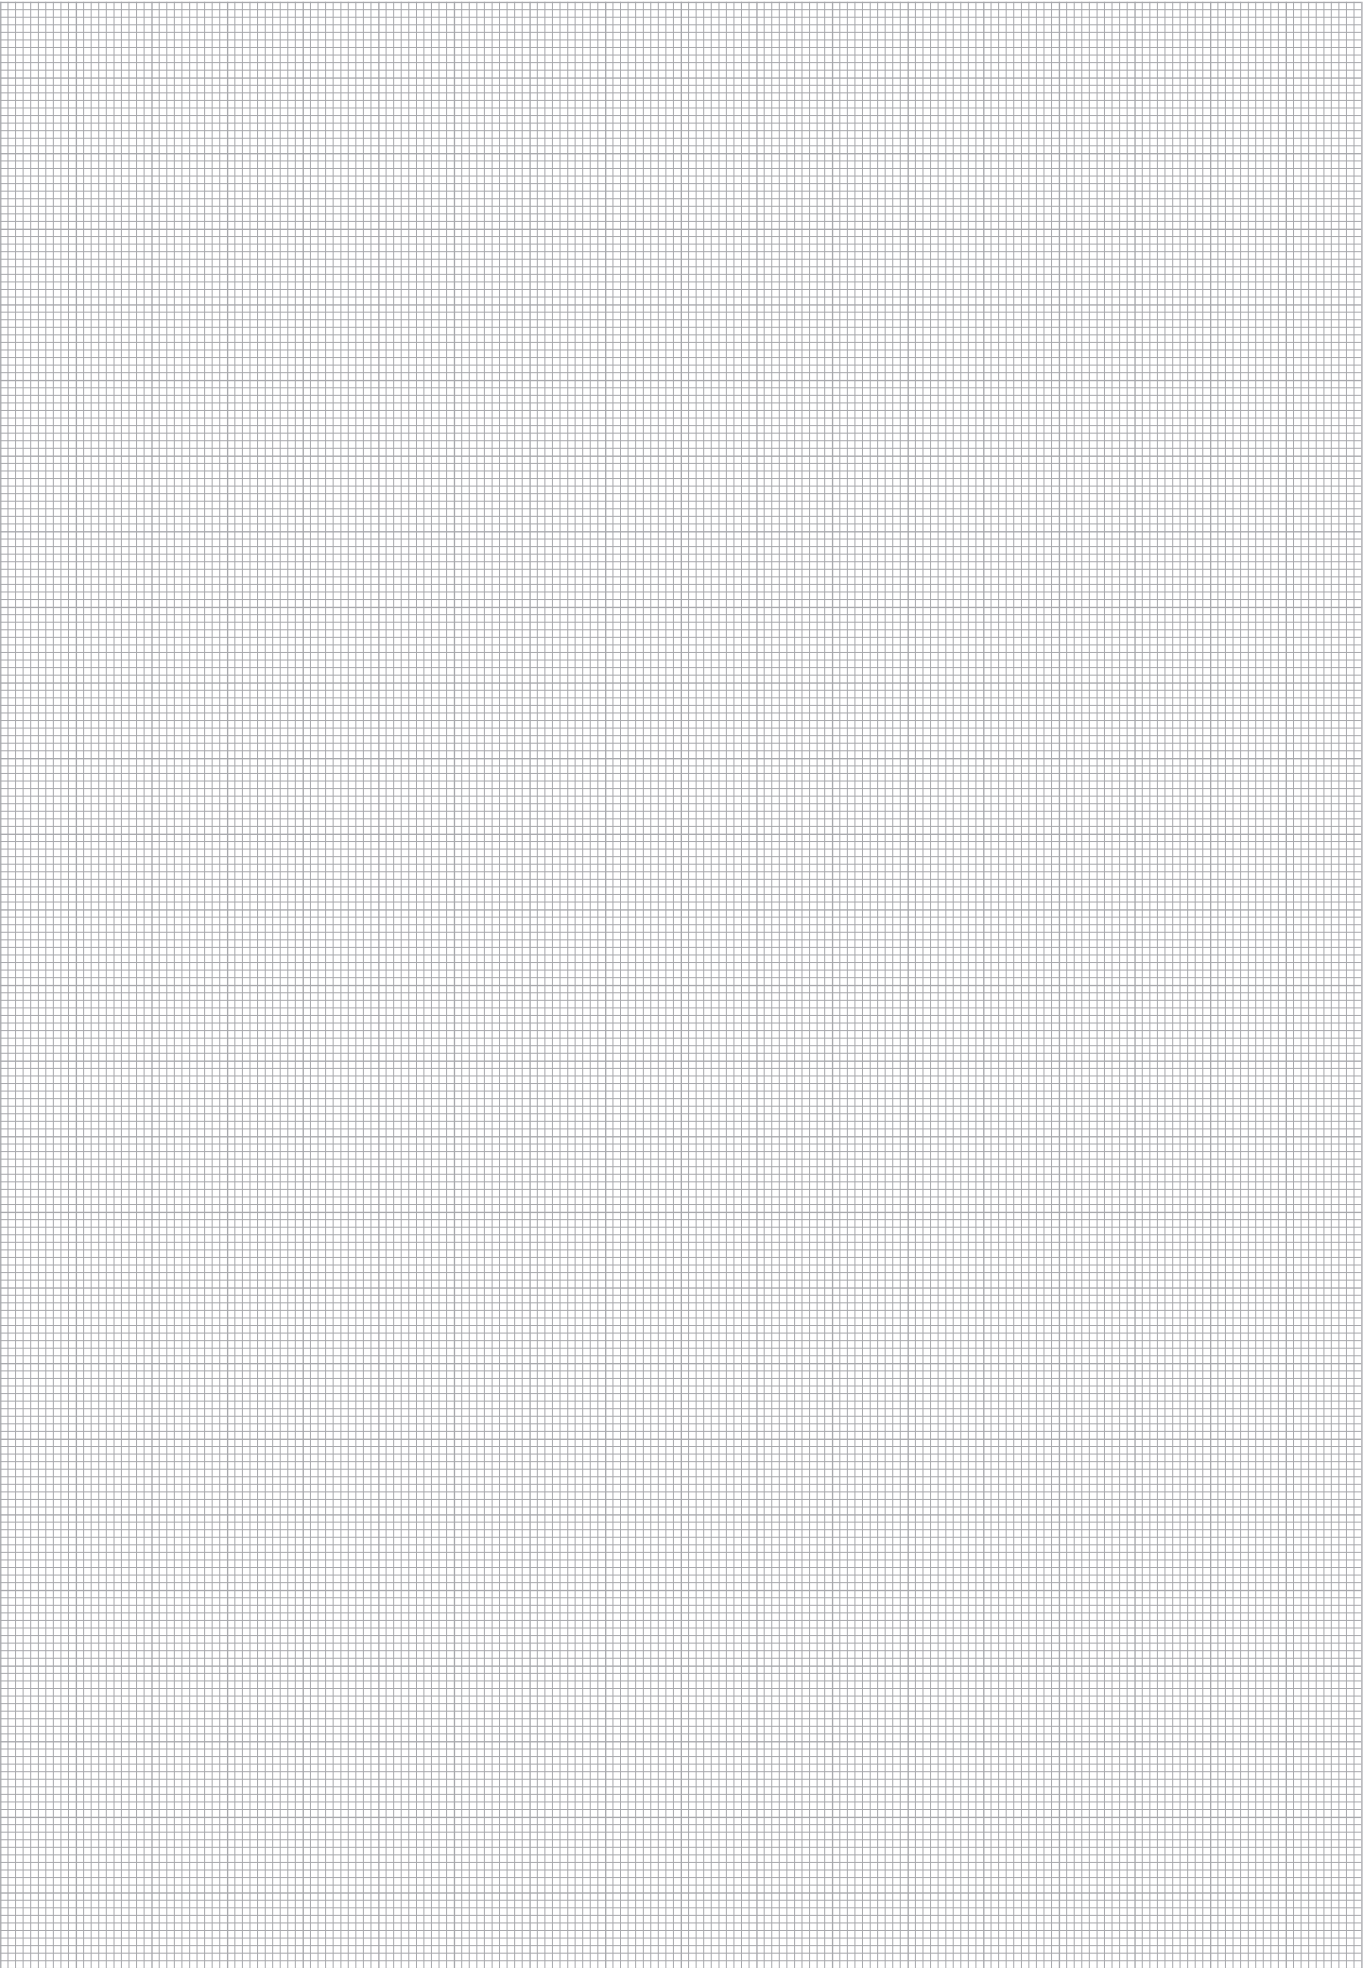



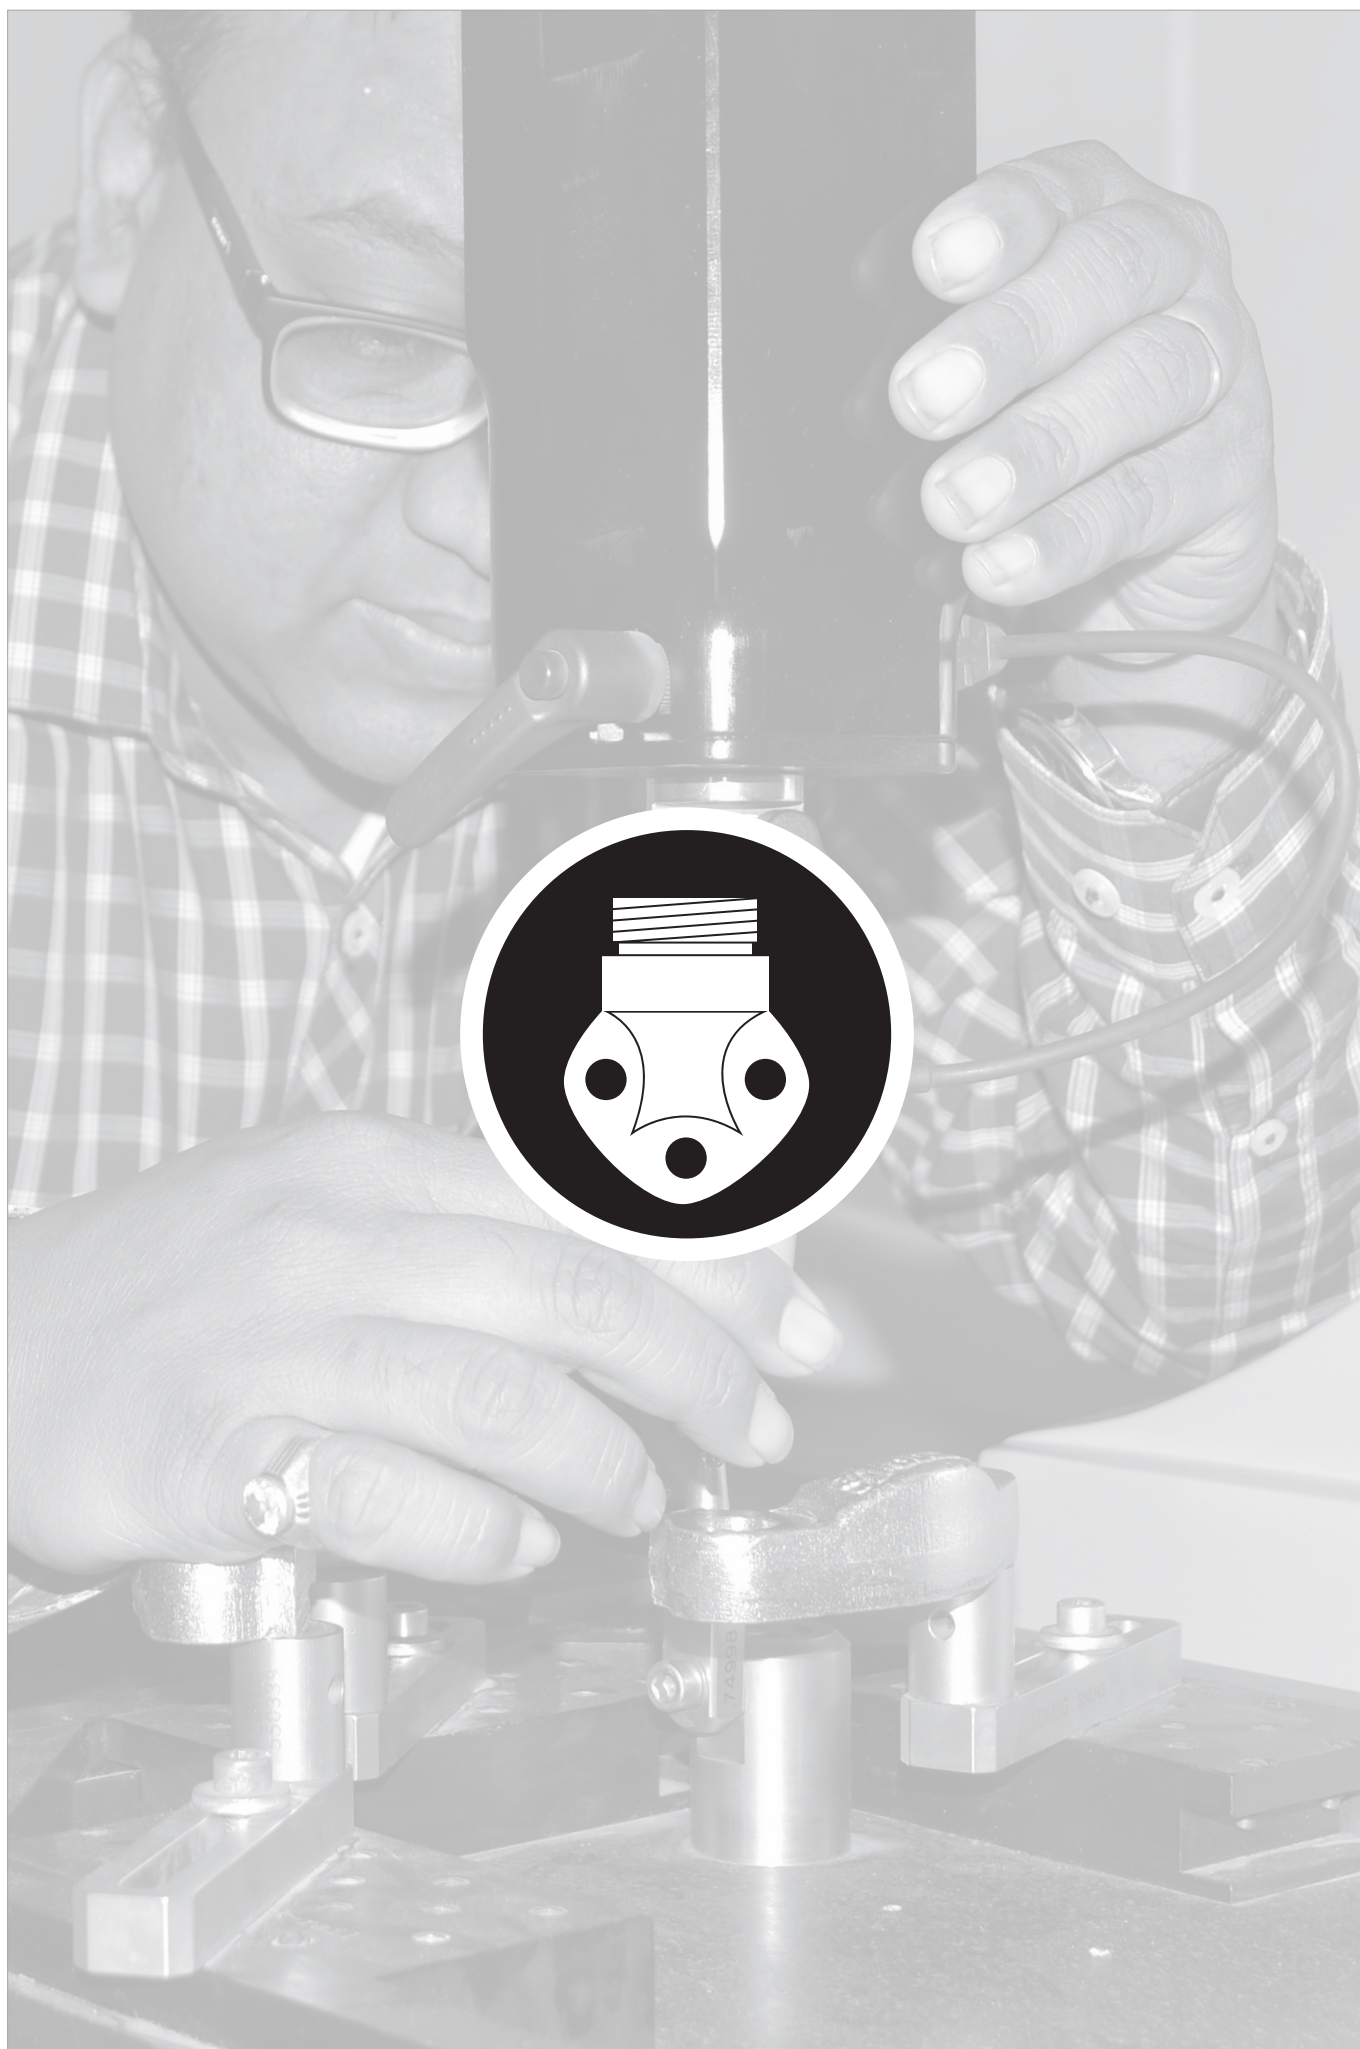



**4-Hole Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)**  
GP-LK-L/S

100



**4-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)**  
WP-3-LK-L/S

101



**3-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)**  
WP-3-LK-L/S

102



**3-Hole 90° Flange with Female BSPP Thread**  
WP-3-LK-G

103



**4-Hole 90° Flange with Female BSPP Thread**  
WP-LK-G

104



**3-Hole 90° Flange with Female BSPP Thread (Aluminium)**  
WP-3-LK-G-W50

105



**4-Hole 90° Flange with Female BSPP Thread (Aluminium)**  
WP-LK-G-W50

106



**4-Hole Flange with Female BSPP Thread (Flat Style)**  
GP-FL-LK-G

107



**4-Hole Butt-Weld Flange**  
GP-LK-ST

108



**4-Hole Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200)**  
GP-LK-B

109




**4-Hole Flange with Female BSPP Thread**  
GP-LK-G

110

F



# 4-Hole Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type GP-LK-L/S

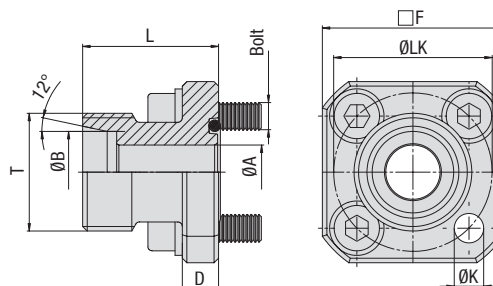

PN <sup>1</sup> ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sup>in</sup> )			Series	D	F	L	T (Metric)	ØK	Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØA	ØB								Metric		
315	35	7	10	L	8	40	30	16x1,5	6,5	13,1	4 x M6x22	20x2,5	GP-LK35-10L-W3-K
4568	1.38	.28	.39		.31	1.57	1.18		.26	28.82			
315	35	9	12	L	8	40	30	18x1,5	6,5	13,5	4 x M6x22	20x2,5	GP-LK35-12L-W3-K
4568	1.38	.35	.47		.31	1.57	1.18		.26	29.70			
250	35	11	15	L	8	40	30	22x1,5	6,5	14,8	4 x M6x22	20x2,5	GP-LK35-15L-W3-K
3625	1.38	.43	.59		.31	1.57	1.18		.26	32.56			
250	35	12	18	L	8	40	30	26x1,5	6,5	15,3	4 x M6x22	20x2,5	GP-LK35-18L-W3-K
3625	1.38	.47	.71		.31	1.57	1.18		.26	33.66			
315	35	12	16	S	8	40	30	24x1,5	6,5	14,5	4 x M6x22	20x2,5	GP-LK35-16S-W3-K
4568	1.38	.47	.63		.31	1.57	1.18		.26	31.90			
100	40	11	15	L	8	40	35	22x1,5	6,5	15,7	4 x M6x22	26x2,5	GP-LK40-15L-W3-K
1450	1.57	.43	.59		.31	1.57	1.38		.26	34.54			
100	40	14	18	L	8	40	35	26x1,5	6,5	16,8	4 x M6x22	26x2,5	GP-LK40-18L-W3-K
1450	1.57	.55	.71		.31	1.57	1.38		.26	36.96			
100	40	18	22	L	8	40	35	30x2	6,5	16,3	4 x M6x22	26x2,5	GP-LK40-22L-W3-K
1450	1.57	.71	.87		.31	1.57	1.38		.26	35.86			
100	40	19	28	L	8	40	35	36x2	6,5	18,0	4 x M6x22	26x2,5	GP-LK40-28L-W3-K
1450	1.57	.75	1.10		.31	1.57	1.38		.26	39.60			
100	55	25	28	L	12	55	35	36x2	8,5	34,3	4 x M8x25	32x2,5	GP-LK55-28L-W3-K
1450	2.17	.98	1.10		.47	2.17	1.38		.33	75.46			
100	55	25	35	L	12	55	50	45x2	8,5	50,2	4 x M8x25	32x2,5	GP-LK55-35L-W3-K
1450	2.17	.98	1.38		.47	2.17	1.97		.33	110.44			
250	55	16	20	S	12	55	35	30x2	8,5	42,9	4 x M8x25	32x2,5	GP-LK55-20S-W3-K
3625	2.17	.63	.79		.47	2.17	1.38		.33	94.38			

## Materials / Ordering Options / Examples


\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc/nickel-plated including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

GP-LK...-...-W3-K

Please always indicate ØLK, ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



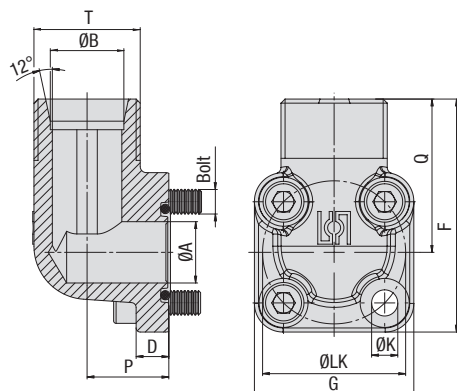

## 4-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1) Type WP-LK-L/S



PN <sup>1</sup> ( <sup>bar</sup> / <sub>PSI</sub> )	Dimensions ( <sup>mm</sup> / <sub>in</sub> )				Series	D	F	G	P	Q	T (Metric)	ØK	Weight ( <sup>kg</sup> / <sub>lbs</sub> ) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØA	ØB	Metric												
315	35	14	10	L	8	57	39	16,5	37,5	16x1,5	6,4	18,4	2 x M6x22	20x2,5	WP-LK35-10L-W3-K	
4568	1.38	.55	.39		.31	2.24	1.54	.65	1.48		.25	40.48	2 x M6x35			
315	35	14	12	L	8	57	39	16,5	37,5	18x1,5	6,4	19,2	2 x M6x22	20x2,5	WP-LK35-12L-W3-K	
4568	1.38	.55	.47		.31	2.24	1.54	.65	1.48		.25	42.24	2 x M6x35			
250	35	14	15	L	8	56,5	39	16,5	37,5	22x1,5	6,4	20,2	2 x M6x22	20x2,5	WP-LK35-15L-W3-K	
3625	1.38	.55	.59		.31	2.22	1.54	.65	1.48		.25	44.44	2 x M6x35			
250	35	15	18	L	8	57	39	20	37,5	26x1,5	6,4	22,0	2 x M6x22	20x2,5	WP-LK35-18L-W3-K	
3625	1.38	.59	.71		.31	2.24	1.54	.79	1.48		.25	48.40	2 x M6x40			
315	35	15	16	S	8	57,5	39	20	38	24x1,5	6,4	25,3	2 x M6x22	20x2,5	WP-LK35-16S-W3-K	
4568	1.38	.59	.63		.31	2.26	1.54	.79	1.50		.25	55.66	2 x M6x40			
315	35	15	20	S	8	64,5	39	25	45	30x2	6,4	30,3	2 x M6x22	20x2,5	WP-LK35-20S-W3-K	
4568	1.38	.59	.79		.31	2.54	1.54	.98	1.77		.25	66.66	2 x M6x45			
100	40	20	15	L	9	58	42	22,5	37	22x1,5	6,4	26,0	4 x M6x22	26x2,5	WP-LK40-15L-W3-K	
1450	1.57	.79	.59		.35	2.28	1.65	.89	1.46		.25	57.14				
100	40	20	18	L	9	59	42	22,5	38	26x1,5	6,4	26,8	4 x M6x22	26x2,5	WP-LK40-18L-W3-K	
1450	1.57	.79	.71		.35	2.32	1.65	.89	1.50		.25	58.96				
100	40	20	22	L	9	59	42	22,5	38	30x2	6,4	26,7	4 x M6x22	26x2,5	WP-LK40-22L-W3-K	
1450	1.57	.79	.87		.35	2.32	1.65	.89	1.50		.25	58.84				
100	40	20	28	L	9	61	42	28	40	36x2	6,4	36,9	2 x M6x22	26x2,5	WP-LK40-28L-W3-K	
1450	1.57	.79	1.10		.35	2.40	1.65	1.10	1.57		.25	81.27	2 x M6x50			
100	40	20	35	L	9	62	42	34	41	45x2	6,4	40,6	2 x M6x22	26x2,5	WP-LK40-35L-W3-K	
1450	1.57	.79	1.38		.35	2.44	1.65	1.34	1.61		.25	89.32	2 x M6x60			
250	40	20	20	S	9	61	42	22,5	40	30x2	6,4	25,9	2 x M6x22	26x2,5	WP-LK40-20S-W3-K	
3625	1.57	.79	.79		.35	2.40	1.65	.89	1.57		.25	56.98	2 x M6x45			
100	55	26,5	35	L	12	78	58	32	49	45x2	8,4	76,6	2 x M8x25	32x2,5	WP-LK55-35L-W3-K	
1450	2.17	1.04	1.38		.47	3.07	2.28	1.26	1.93		.33	168.52	2 x M8x60			
100	55	26,5	42	L	12	78	58	40	49	52x2	8,4	103,6	2 x M8x25	32x2,5	WP-LK55-42L-W3-K	
1450	2.17	1.04	1.65		.47	3.07	2.28	1.57	1.93		.33	227.88	2 x M8x70			
250	55	18,2	20	S	13	69	58	24	45	30x2	8,4	61,7	2 x M8x25	32x2,5	WP-LK55-20S-W3-K	
3625	2.17	.72	.79		.51	2.72	2.28	.94	1.77		.33	135.70	2 x M8x50			
250	55	26,5	25	S	13	78	58	30	49	36x2	8,4	62,0	2 x M8x25	32x2,5	WP-LK55-25S-W3-K	
3625	2.17	1.04	.98		.51	3.07	2.28	1.18	1.93		.33	136.40	2 x M8x55			
250	55	26,5	30	S	12	78	58	32	49	42x2	8,4	63,2	2 x M8x25	32x2,5	WP-LK55-30S-W3-K	
3625	2.17	1.04	1.18		.47	3.07	2.28	1.26	1.93		.33	139.04	2 x M8x50			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc/nickel-plated including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

WP-LK...-...-W3-K

Please always indicate ØLK, ØB and Series.



**3-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (acc. to ISO 8434-1)  
Type WP-3-LK-L/S**

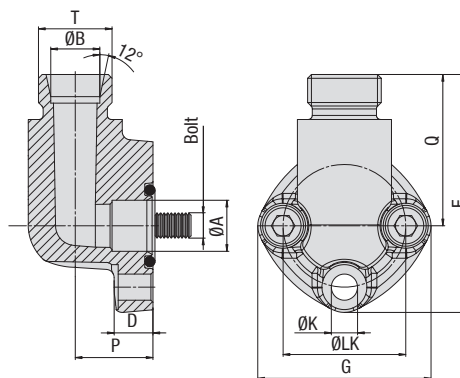

PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)				D	F	G	P	Q	T (Metric)	ØK	Weight (kg/lbs) ca. per 100	Bolts Metric	O-ring	Ordering Codes
8.8	ØLK	ØA	ØB												
250	30	12,5	12	L	9	58	42,5	19	37	18x1,5	6,4	17,7	3 x M6x25	16x2,5	WP-3-LK30-12L-W3-K
3625	1.18	.49	.47		.35	2.28	1.67	.75	1.46		.25	38.94			
250	30	12,5	15	L	9	58	42,5	19	37	22x1,5	6,4	19,5	3 x M6x25	16x2,5	WP-3-LK30-15L-W3-K
3625	1.18	.49	.59		.35	2.28	1.67	.75	1.46		.25	42.96			
160	40	19	22	L	13,5	70	54	25	43	30x2	8,4	40,4	3 x M8x30	24x2,5	WP-3-LK40-22L-W3-K
2320	1.57	.75	.87		.53	2.76	2.13	.98	1.69		.33	88.88			
160	40	19	28	L	13,5	70	54	25	43	36x2	8,4	35,7	3 x M8x30	24x2,5	WP-3-LK40-28L-W3-K
2320	1.57	.75	1.10		.53	2.76	2.13	.98	1.69		.33	78.54			

F

**Materials / Ordering Options / Examples**

\* Kit with 3-Hole Flange made of Steel S355J0 or equivalent, zinc/nickel-plated including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)


WP-3-LK...-...-W3-K

Please always indicate ØLK, ØB and Series.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.





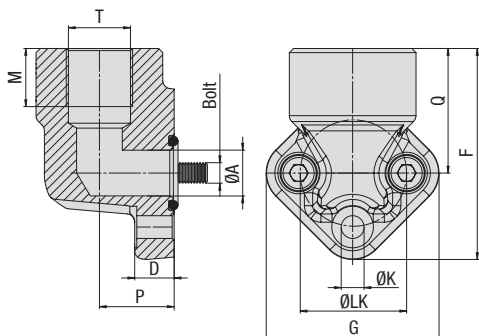

### 3-Hole 90° Flange with Female BSPP Thread Type WP-3-LK-G



PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) ca. per 100	Bolts Metric	O-ring	Ordering Codes
8.8	ØLK	ØA	D	F	G	M	P	Q	T (BSPP)	ØK				
300	26	11,5	9,5	51	42	14	18	30	3/8 (06)	5,5	9,1	3 x M5x20	14x1,78	WP-3-LK26-G06-W3-K
4350	1.02	.45	.37	2.01	1.65	.55	.71	1.18		.22	20.02			
300	26	11,5	9,5	51	42	14	18	30		5,5	8,6	3 x M5x20	14x1,78	WP-3-LK26-G08-W3-K
4350	1.02	.45	.37	2.01	1.65	.55	.71	1.18	1/2 (08)	.22	18.92			
300	30	11,5	9,5	51	42	14	18	30	3/8 (06)	6,5	12,0	3 x M6x20	16x2,5	WP-3-LK30-G06-W3-K
4350	1.18	.45	.37	2.01	1.65	.55	.71	1.18		.26	26.40			
300	30	11,5	9,5	51	42	14	18	30	1/2 (08)	6,5	11,2	3 x M6x20	16x2,5	WP-3-LK30-G08-W3-K
4350	1.18	.45	.37	2.01	1.65	.55	.71	1.18		.26	24.64			
300	40	18	11,5	68	61	18	21	38	1/2 (08)	8,5	24,0	3 x M8x25	24x2,5	WP-3-LK40-G08-W3-K
4350	1.57	.71	.45	2.68	2.40	.71	.83	1.50		.33	52.80			
300	40	18	11,5	68	61	22	21	38	3/4 (12)	8,5	22,8	3 x M8x25	24x2,5	WP-3-LK40-G12-W3-K
4350	1.57	.71	.45	2.68	2.40	.87	.83	1.50		.33	50.16			
300	51	25	13,5	84	75	22	27	47	3/4 (12)	10,5	49,8	3 x M10x30	32x2,5	WP-3-LK51-G12-W3-K
4350	2.01	.98	.53	3.31	2.95	.87	1.06	1.85		.41	109.56			
300	51	25	13,5	84	75	27	27	47	1 (16)	10,5	46,4	3 x M10x30	32x2,5	WP-3-LK51-G16-W3-K
4350	2.01	.98	.53	3.31	2.95	1.06	1.06	1.85		.41	102.08			
300	56	34	13,5	84	75	22	27	47	3/4 (12)	10,5	69,4	3 x M10x30	38x2,5	WP-3-LK56-G12-W3-K
4350	2.20	1.34	.53	3.31	2.95	.87	1.06	1.85		.41	152.68			
300	56	34	13,5	84	75	27	27	47	1 (16)	10,5	60,7	3 x M10x30	38x2,5	WP-3-LK56-G16-W3-K
4350	2.20	1.34	.53	3.31	2.95	1.06	1.06	1.85		.41	133.54			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


\* Kit with 3-Hole Flange made of Steel S355J0 or equivalent, zinc/nickel-plated including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

WP-3-LK...-G\*\*-W3-K

Please always indicate ØLK and Thread Size.



## 4-Hole 90° Flange with Female BSPP Thread Type WP-LK-G

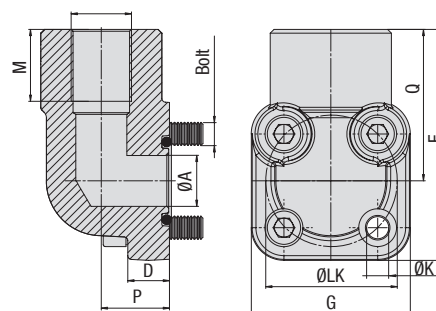

PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØA	D	F	G	M	P	Q	T (BSPP)	ØK		Metric		
300	35	13,5	11	61	42	19	18	40	3/8 (06)	6,5	33,1	2 x M6x20	19x2,5	WP-LK35-G06-W3-K
4350	1.38	.53	.43	2.40	1.65	.75	.71	1.57		.26	72.82	2 x M6x35		
300	35	13,5	11	61	42	19	18	40	1/2 (08)	6,5	32,3	2 x M6x20	19x2,5	WP-LK35-G08-W3-K
4350	1.38	.53	.43	2.40	1.65	.75	.71	1.57		.26	71.06	2 x M6x35		
300	40	20	10	67,5	45	19	24	45	1/2 (08)	6,5	38,3	2 x M6x25	24x2,5	WP-LK40-G08-W3-K
4350	1.57	.79	.39	2.66	1.77	.75	.94	1.77		.26	84.26	2 x M6x45		
300	40	20	10	67,5	45	20	24	45	3/4 (12)	6,5	35,7	2 x M6x25	24x2,5	WP-LK40-G12-W3-K
4350	1.57	.79	.39	2.66	1.77	.79	.94	1.77		.26	78.49	2 x M6x45		
300	40	20	10	67,5	45	22	24	45	1 (16)	6,5	48,3	2 x M6x25	24x2,5	WP-LK40-G16-W3-K
4350	1.57	.79	.39	2.66	1.77	.87	.94	1.77		.26	106.26	2 x M6x55		
250	55	25	13	83,5	59	22	35	54	1 (16)	8,5	82,3	2 x M8x25	32x2,5	WP-LK55-G16-W3-K
3625	2.17	.98	.51	3.29	2.32	.87	1.38	2.13		.33	181.06	2 x M8x60		
250	55	25	13	83,5	59	25	35	54	1-1/4 (20)	8,5	107,2	2 x M8x25	32x2,5	WP-LK55-G20-W3-K
3625	2.17	.98	.51	3.29	2.32	.98	1.38	2.13		.33	235.84	2 x M8x70		

### Materials / Ordering Options / Examples


\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc/nickel-plated including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

WP-LK...-G\*\*-W3-K


Please always indicate ØLK and Thread Size.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



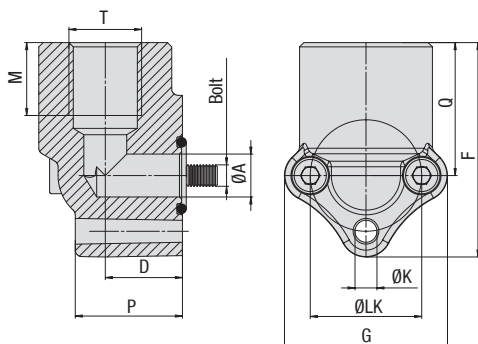

### 3-Hole 90° Flange with Female BSPP Thread (Aluminium) Type WP-3-LK-G-W50



PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)										Weight (kg/lbs) ca. per 100	Bolts Metric	O-ring	Ordering Codes
8.8	ØLK	ØA	D	F	G	M	P	Q	T (BSPP)	ØK				
180	26	10	25	50	38	17	18	31	3/8 (06)	6	9,1	3 x M5x35	14x1,78	WP-3-LK26-G06-W50-K
2610	1.02	.39	.98	1.97	1.50	.67	.71	1.22		.24	20.02			
180	26	10	25	50	38	18	18	31	1/2 (08)	6	8,6	3 x M5x35	14x1,78	WP-3-LK26-G08-W50-K
2610	1.02	.39	.98	1.97	1.50	.71	.71	1.22		.24	18.92			
180	30	12,5	26	53	40	17	18	31	3/8 (06)	7	12,0	3 x M6x35	15,88x2,62	WP-3-LK30-G06-W50-K
2610	1.18	.49	1.02	2.09	1.57	.67	.71	1.22		.28	26.40			
180	30	12,5	26	53	44	18	18	31	1/2 (08)	7	11,2	3 x M6x35	15,88x2,62	WP-3-LK30-G08-W50-K
2610	1.18	.49	1.02	2.09	1.73	.71	.71	1.22		.28	24.64			
180	40	18	31	68	56	18	21,5	40	1/2 (08)	9,5	24,0	3 x M8x45	21,89x2,62	WP-3-LK40-G08-W50-K
2610	1.57	.71	1.22	2.68	2.20	.71	.85	1.57		.37	52.80			
180	40	18	31	68	56	22	21,5	40	3/4 (12)	9,5	22,8	3 x M8x45	21,89x2,62	WP-3-LK40-G12-W50-K
2610	1.57	.71	1.22	2.68	2.20	.87	.85	1.57		.37	50.16			
180	51-56	24,5	42	85	78	22	26	46	3/4 (12)	11	49,8	3 x M10x60	29,74x2,62	WP-3-LK51-G12-W50-K
2610	2.01-2.20	.96	1.65	3.35	3.07	.87	1.02	1.81		.43	109.56			
180	51-56	24,5	42	85	78	27	26	46	1 (16)	11	46,4	3 x M10x60	29,74x2,62	WP-3-LK51-G16-W50-K
2610	2.01-2.20	.96	1.65	3.35	3.07	1.06	1.02	1.81		.43	102.08			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


\* Kit with 3-Hole Flange made of Aluminium [EN AC-Al Si9Cu(Fe)]  
including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

WP-3-LK...-G\*\*-W50-K

Please always indicate ØLK and Thread Size.



## 4-Hole 90° Flange with Female BSPP Thread (Aluminium) Type WP-LK-G-W50

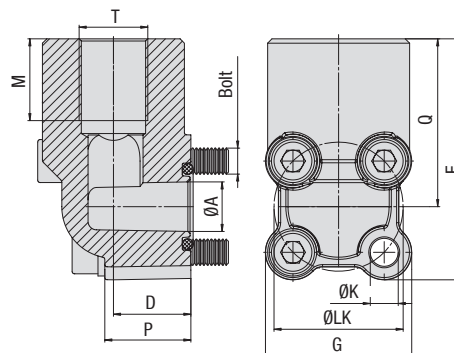

PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)									Weight (kg/lbs) ca. per 100	Bolts Metric	O-ring	Ordering Codes
8.8	ØLK	ØA	D	F	G	M	P	Q	T (BSPP)	ØK			
180	30	11,5	20	56	34	19	18	39	3/8 (06)	6,5	14,3	2 x M6x30	WP-LK30-G06-W50-K
2610	1.18	.45	.79	2.20	1.34	.75	.71	1.54		.26	31.46	2 x M6x40	
180	30	11,5	20	56	34	19	18	39	1/2 (08)	6,5	13,8	2 x M6x30	WP-LK30-G08-W50-K
2610	1.18	.45	.79	2.20	1.34	.75	.71	1.54		.26	30.36	2 x M6x40	
180	35	14	20	61,5	38	19	18	42,5	3/8 (06)	6,5	85,8	2 x M6x30	WP-LK35-G06-W50-K
2610	1.38	.55	.79	2.42	1.50	.75	.71	1.67		.26	188.76	2 x M6x40	
180	35	14	20	61,5	38	19	18	42,5	1/2 (08)	6,5	14,2	2 x M6x30	WP-LK35-G08-W50-K
2610	1.38	.55	.79	2.42	1.50	.75	.71	1.67		.26	31.24	2 x M6x40	
180	40	18	28	69	43	19	24	47,5	1/2 (08)	6,5	21,8	2 x M6x40	WP-LK40-G08-W50-K
2610	1.57	.71	1.10	2.72	1.69	.75	.94	1.87		.26	47.96	2 x M6x50	
180	40	18	28	69	43	20	24	47,5	3/4 (12)	6,5	22,0	2 x M6x40	WP-LK40-G12-W50-K
2610	1.57	.71	1.10	2.72	1.69	.79	.94	1.87		.26	48.40	2 x M6x50	
180	55	24,5	31	83	58	20	29	54	3/4 (12)	8,5	42,4	2 x M8x45	WP-LK55-G12-W50-K
2610	2.17	.96	1.22	3.27	2.28	.79	1.14	2.13		.33	93.28	2 x M8x60	
180	55	24,5	31	83	58	22	29	54	1 (16)	8,5	41,0	2 x M8x45	WP-LK55-G16-W50-K
2610	2.17	.96	1.22	3.27	2.28	.87	1.14	2.13		.33	90.20	2 x M8x60	

### Materials / Ordering Options / Examples


\* Kit with 4-Hole Flange made of Aluminium [EN AC-Al Si9Cu(Fe)]  
including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

WP-LK...-G\*\*-W50-K

Please always indicate ØLK and Thread Size.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



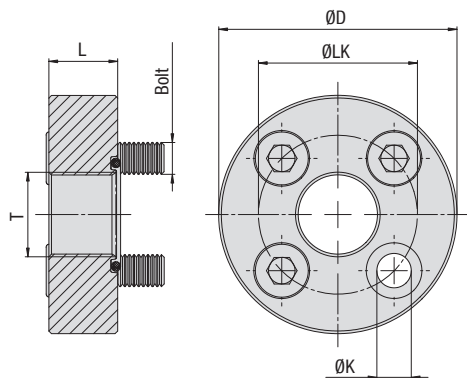

## 4-Hole Flange with Female BSPP Thread (Flat Style) Type GP-FL-LK-G



PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)						Weight (kg/lbs) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØD	L	T (BSPP)	ØK			Metric		
250	30	45	13	3/8 (06)	6,5	14,3		M6x16	18,77x1,78	GP-FL-LK30-G06-W129-K
3625	1.18	1.77	.51		.26	31.46				
250	40	58	15	1/2 (08)	8,5	27,4		M8x20	25,12x1,78	GP-FL-LK40-G08-W129-K
3625	1.57	2.28	.59		.33	60.28				
250	51	75	18	3/4 (12)	10,5	55,3		M10x25	31,42x2,62	GP-FL-LK51-G12-W129-K
3625	2.01	2.95	.71		.41	121.66				
250	56	75	18	3/4 (12)	10,5	55,4		M10x25	31,42x2,62	GP-FL-LK56-G12-W129-K
3625	2.20	2.95	.71		.41	121.88				
180	62	88	20	1 (16)	10,5	82,0		M10x25	39,69x3,53	GP-FL-LK62-G16-W129-K
2610	2.44	3.46	.79		.41	180.40				
180	62	88	20	1 (16)	12,5	81,5		M12x25	39,69x3,53	GP-FL-LK62-G16-M12-W129-K
2610	2.44	3.46	.79		.49	179.30				
180	72,5	98	22	1-1/4 (20)	12,5	106,6		M12x30	47,22x3,53	GP-FL-LK72.5-G20-W129-K
2610	2.85	3.86	.87		.49	234.52				

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.

### Materials / Ordering Options / Examples


\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated GP-LK...-G\*\*-W129-K including Metric bolts 8.8, O-ring made of NBR (Buna-N®)

Please always indicate ØLK and Thread Size.





## 4-Hole Butt-Weld Flange Type GP-LK-ST

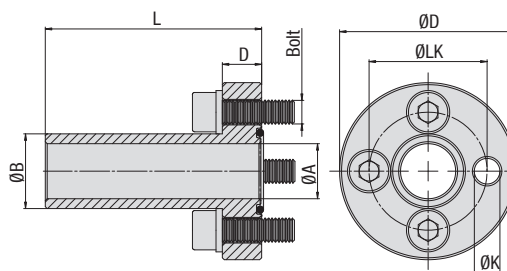

PN <sup>1</sup> ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sup>in</sup> )							Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Bolts Metric	O-ring	Ordering Codes
8.8	ØLK	ØA	ØB	D	ØD	L	ØK				
250	30	14	19	10	45	55	6,5	17,9	M6x20	18,77x1,78	GP-LK30-ST-19/14-W1-K
3625	1.18	.55	.75	.39	1.77	2.17	.26	39.38			
250	40	19	25,4	12	58	60	8,5	34,9	M8x25	25,12x1,78	GP-LK40-ST-25.4/19-W1-K
3625	1.57	.75	1.00	.47	2.28	2.36	.33	76.78			
250	51	24,5	32	16	76	72	10,5	74,4	M10x35	31,42x2,62	GP-LK51-ST-32/24.5-W1-K
3625	2.01	.96	1.26	.63	2.99	2.83	.41	163.68			
250	56	24,5	32	16	76	72	10,5	74,2	M10x35	31,42x2,62	GP-LK56-ST-32/24.5-W1-K
3625	2.20	.96	1.26	.63	2.99	2.83	.41	163.24			

### Materials / Ordering Options / Examples

\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, blank (oiled)  
including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)


GP-LK...-ST-\*\*-\*\*-W1-K

Please always indicate ØLK, ØB and ØA.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



**4-Hole Flange with Male BSPP Thread  
and 60° Conical Bore (acc. to BS 5200)  
Type GP-LK-B**

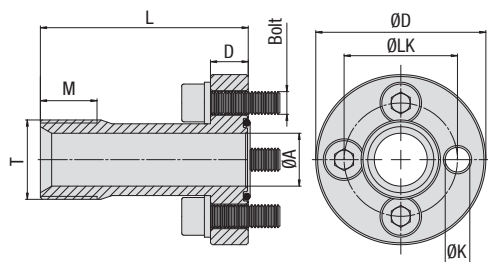

PN <sup>1</sup> ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sup>in</sup> )								Weight ( <sup>kg</sup> / <sup>lbs</sup> ) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØA	D	ØD	L	M	T (BSPP)	ØK		Metric		
250	30	14	10	45	55	15	1/2 (08)	6,5	17,1	M6x20	18,77x1,78	GP-LK30-B08-W129-K
3625	1.18	.55	.39	1.77	2.17	.59		.26	37.62			
250	40	19	12	58	60	16	3/4 (12)	8,5	33,8	M8x25	25,12x1,78	GP-LK40-B12-W129-K
3625	1.57	.75	.47	2.28	2.36	.63		.33	74.36			
250	51	24	16	76	72	19	1 (16)	10,5	71,3	M10x35	31,42x2,62	GP-LK51-B16-W129-K
3625	2.01	.94	.63	2.99	2.83	.75		.41	156.86			
250	56	24	16	76	72	19	1 (16)	10,5	71,5	M10x35	31,42x2,62	GP-LK56-B16-W129-K
3625	2.20	.94	.63	2.99	2.83	.75		.41	157.30			

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.


### Materials / Ordering Options / Examples

\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **GP-LK...-B\*\*-W129-K** including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

Please always indicate ØLK and Thread Size.



## 4-Hole Flange with Female BSPP Thread Type GP-LK-G

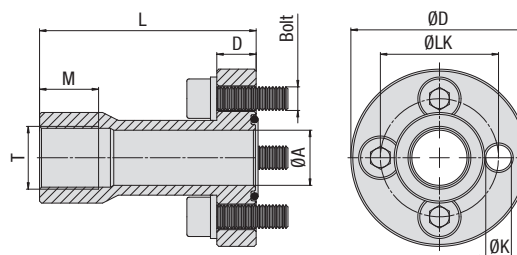

PN <sup>1</sup> (bar/PSI)	Dimensions (mm/in)								Weight (kg/lbs) ca. per 100	Bolts	O-ring	Ordering Codes
8.8	ØLK	ØA	D	ØD	L	M	T (BSPP)	ØK		Metric		
250	30	14	10	45	55	15	3/8 (06)	6,5	18,7	M6x20	18,77x1,78	GP-LK30-G06-W129-K
3625	1.18	.55	.39	1.77	2.17	.59		.26	41.14			
250	40	19	12	58	60	16	1/2 (08)	8,5	35,4	M8x25	25,12x1,78	GP-LK40-G08-W129-K
3625	1.57	.75	.47	2.28	2.36	.63		.33	77.88			
250	51	24,5	16	76	72	19	3/4 (12)	10,5	74,1	M10x35	31,42x2,62	GP-LK51-G12-W129-K
3625	2.01	.96	.63	2.99	2.83	.75		.41	163.02			
250	56	24,5	16	76	72	19	3/4 (12)	10,5	74,3	M10x35	31,42x2,62	GP-LK56-G12-W129-K
3625	2.20	.96	.63	2.99	2.83	.75		.41	163.46			

F


### Materials / Ordering Options / Examples

\* Kit with 4-Hole Flange made of Steel S355J0 or equivalent, zinc-plated and thick-film-passivated **GP-LK...-G\*\*-W129-K** including Metric bolts 8.8, spring rings, O-ring made of NBR (Buna-N®)

Please always indicate ØLK and Thread Size.

<sup>1</sup> The maximum working pressure PN (bar/PSI) applies only to the flange itself. The actual maximum working pressure depends on the thickness and the quality of the tube used.



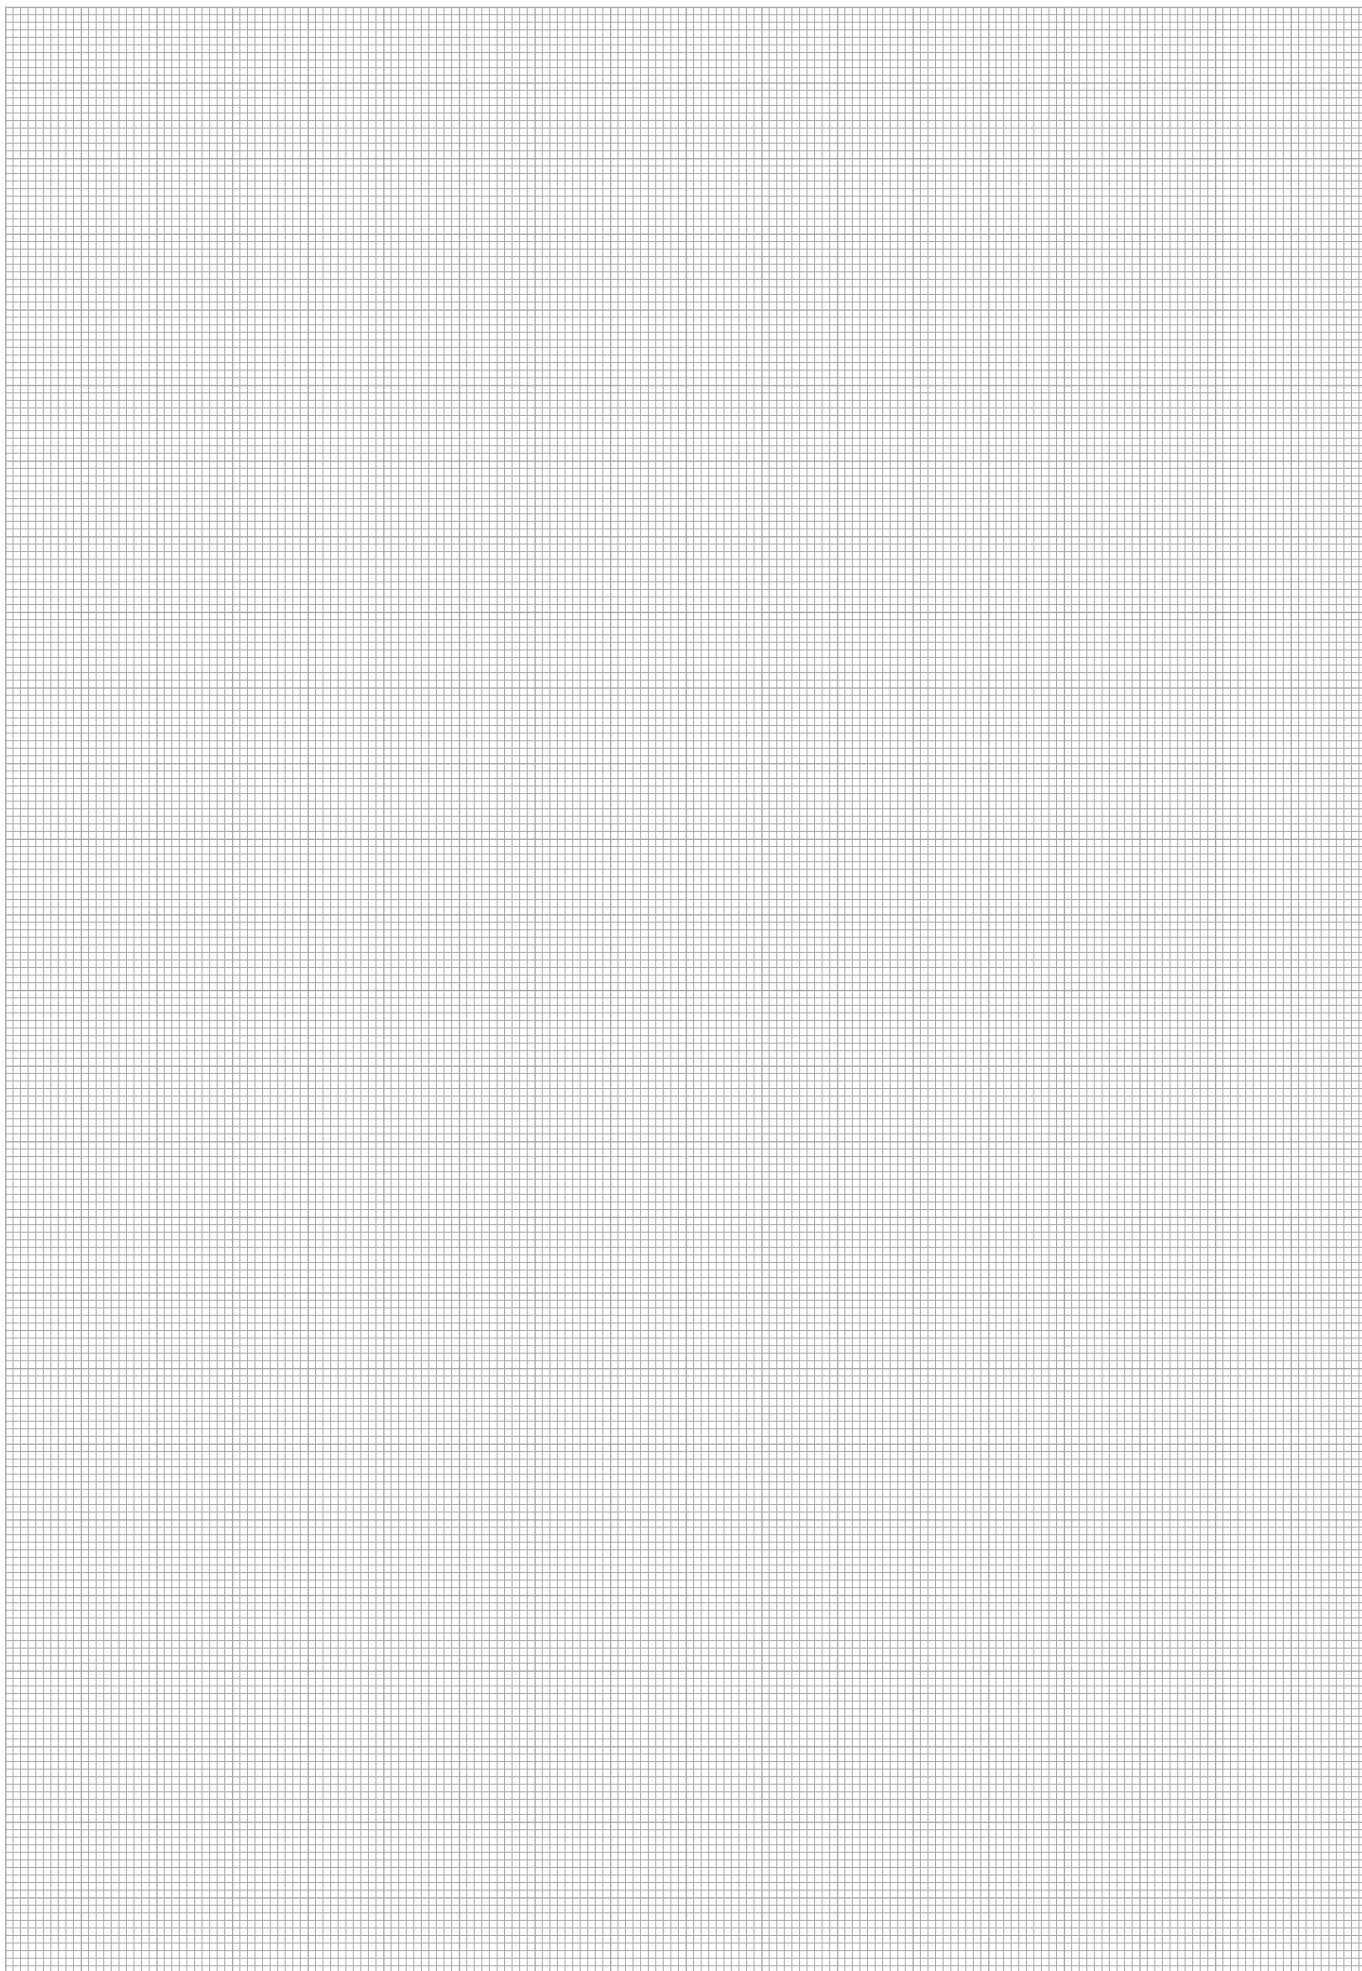

F








Assembly Instructions for SAE Flanges	114
Property Classes of Bolts	115
Tightening Torques	115
Sizing Guide for SAE Flanges	116




## Assembly Instructions for SAE Flanges

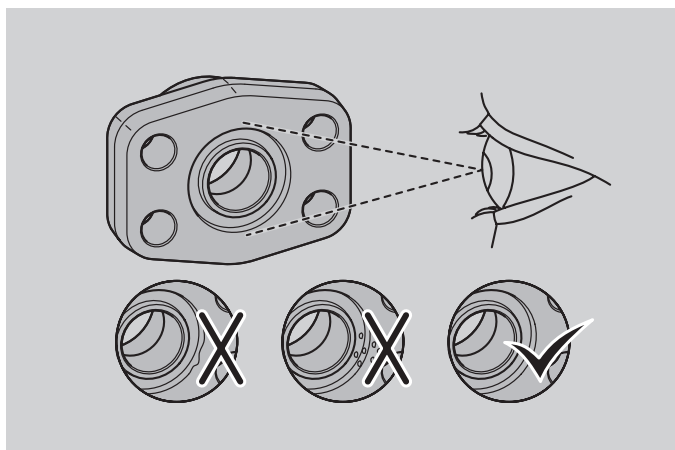


Check the sealing surface and the o-ring groove of the flange for visible damage (scratches, cracks, notches, sharp edges or burrs) and make sure that both are free of contamination and any foreign particles. Circular machining marks up to a surface roughness of  $Ra \max 3,2$  (ISO 1302) are acceptable and do not influence the performance of the flange connection.

Scratches with a width greater than 0,13 mm (.0005 in) running perpendicular, radial, or spiral on the sealing surface or in the o-ring groove are not acceptable.

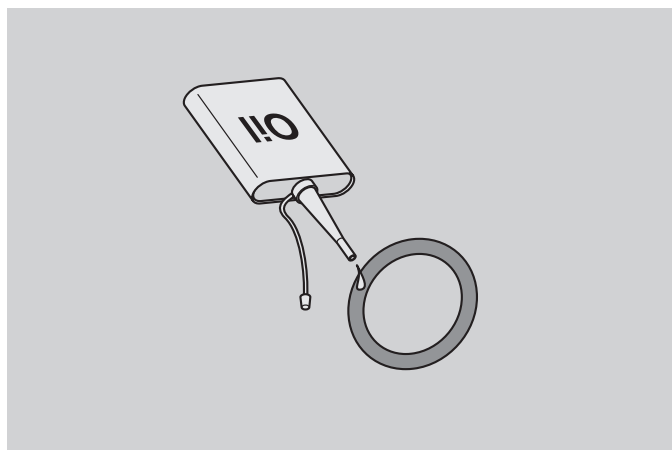


Lubricate the o-ring using the system fluid (or a compatible lubricant) and immediately proceed with the assembly in order to avoid exposure to contamination.


Do not use lubricating grease!

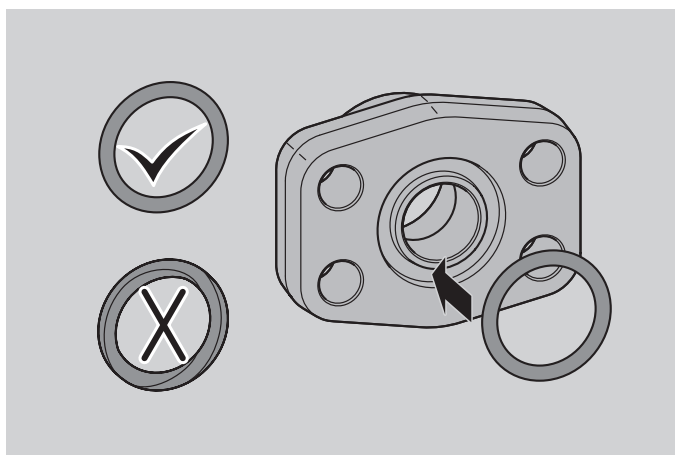


Place the o-ring into the o-ring groove, making sure that it is not twisted.

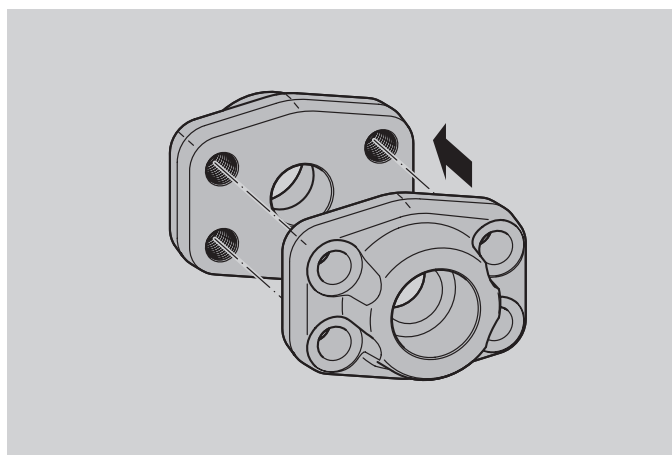

Position the flange against the mating component.

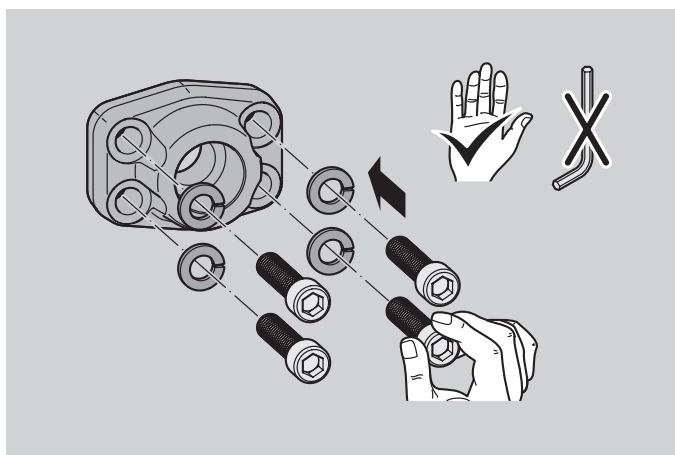

Place the socket head screws (with spring washers) into the flange and hand-tighten.

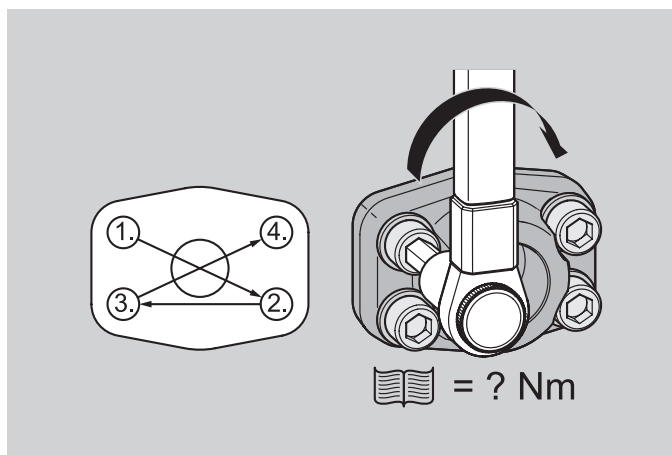

Finish the assembly by gradually tightening the socket head screws in small increments and in the displayed sequence to the appropriate torque level (see table on the right).



## Property Classes of Bolts and Tightening Torques

### Bolts 8.8 M (Metric Standard)

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	M8	24	17.8	350	5075	1400	20300
19	3/4	M10	50	37.0	350	5075	1400	20300
25	1	M10	50	37.0	250	3625	1000	14500
32	1-1/4	M10	50	37.0	200	2900	800	11600
38	1-1/2	M12	92	68.1	200	2900	800	11600
51	2	M12	92	68.1	160	2320	640	9280
64	2-1/2	M12	92	68.1	100	1450	400	5800
76	3	M16	210	155.4	100	1450	400	5800
89	3-1/2	M16	210	155.4	35	508	140	2030
102	4	M16	210	155.4	35	508	140	2030
127	5	M16	210	155.4	35	508	140	2030

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	M8	24	17.8	350	5075	1400	20300
19	3/4	M10	50	37.0	350	5075	1400	20300
25	1	M12	92	68.1	350	5075	1400	20300
32	1-1/4	M12	92	68.1	350	5075	1400	20300
32	1-1/4	M14 <sup>1</sup>	130	96.2	350	5075	1400	20300
38	1-1/2	M16	210	155.4	350	5075	1400	20300
51	2	M20	400	296.0	350	5075	1400	20300

### Bolts Gr8 U (UNC)

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	5/16-18 UNC	32	23.7	350	5075	1400	20300
19	3/4	3/8-16 UNC	60	44.4	350	5075	1400	20300
25	1	3/8-16 UNC	60	44.4	315	4568	1260	18270
32	1-1/4	7/16-14 UNC	92	68.1	250	3625	1000	14500
38	1-1/2	1/2-13 UNC	150	111.0	200	2900	800	11600
51	2	1/2-13 UNC	150	111.0	200	2900	800	11600
64	2-1/2	1/2-13 UNC	150	111.0	160	2320	640	9280
76	3	5/8-11 UNC	295	218.3	160	2320	640	9280
89	3-1/2	5/8-11 UNC	295	218.3	35	508	140	2030
102	4	5/8-11 UNC	295	218.3	35	508	140	2030
127	5	5/8-11 UNC	295	218.3	35	508	140	2030

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	5/16-18 UNC	32	23.7	420	6090	1680	24366
19	3/4	3/8-16 UNC	60	44.4	420	6090	1680	24366
25	1	7/16-14 UNC	92	68.1	420	6090	1680	24366
32	1-1/4	1/2-13 UNC	150	111.0	420	6090	1680	24366
38	1-1/2	5/8-11 UNC	295	218.3	420	6090	1680	24366
51	2	3/4-10 UNC	450	333.0	420	6090	1680	24366

### Bolts 10.9 MH (Metric High)

3000 PSI Standard Pressure Series (according to ISO 6162-1:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	M8	32	23.7	350	5075	1400	20300
19	3/4	M10	70	51.8	350	5075	1400	20300
25	1	M10	70	51.8	315	4568	1260	18270
32	1-1/4	M10	70	51.8	250	3625	1000	14500
38	1-1/2	M12	130	96.2	200	2900	800	11600
51	2	M12	130	96.2	200	2900	800	11600
64	2-1/2	M12	130	96.2	160	2320	640	9280
76	3	M16	295	218.3	160	2320	640	9280
89	3-1/2	M16	295	218.3	35	508	140	2030
102	4	M16	295	218.3	35	508	140	2030
127	5	M16	295	218.3	35	508	140	2030

6000 PSI High Pressure Series (according to ISO 6162-2:2002)

Nominal Size		Bolt Size	Tightening Torques <sup>+10%</sup>		Working Pressure max		Burst Pressure min	
ISO	SAE		(Nm)	(ft-lb)	(bar)	(PSI)	(bar)	(PSI)
13	1/2	M8	32	23.7	420	6090	1680	24366
19	3/4	M10	70	51.8	420	6090	1680	24366
25	1	M12	130	96.2	420	6090	1680	24366
32	1-1/4	M12	130	96.2	420	6090	1680	24366
32	1-1/4	M14 <sup>1</sup>	180	133.2	420	6090	1680	24366
38	1-1/2	M16	295	218.3	420	6090	1680	24366
51	2	M20	550	407.0	420	6090	1680	24366

G

### Notes

<sup>1</sup> Not to be used for new designs.

#### Attention:

**All bolts have to be pre-tightened before applying the full tightening torque to the bolts. Otherwise, the flange may break.**

Please note that the tightening torques as stated on this page are only recommendations. These values correspond to oiled bolts with a friction coefficient of 0.17 and the material combination Steel/Steel.




The exact tightening torques depend on factors like material, finishing, coating and lubrication of the components used, and have to be determined by the user himself.

Please contact STAUFF prior to the assembly for torque recommendations for alternative mating materials.







## Sizing Guide for SAE Flanges 3000 PSI Standard Pressure Series

Nominal Size SAE	Dimensions ( <sup>mm</sup> / <sub>in</sub> )			Metric Threads
	H	I	ØK	
1/2	17,5	38,1	8,7	M8
	.69	1,50	.34	
3/4	22,3	47,6	1,5	M10
	.88	1,87	.41	
1	26,2	52,4	1,5	M10
	1,03	2,06	.41	
1-1/4	3,2	58,7	1,5 / 12,5	M10 / M12
	1,19	2,31	.41 / .49	
1-1/2	35,7	69,9	13,5 / 14,5	M12 / M14
	1,41	2,75	.53 / .57	
2	42,9	77,8	13,5 / 14,5	M12 / M14
	1,69	3,06	.53 / .57	
2-1/2	5,8	88,9	13,5 / 14,5	M12 / M14
	2,00	3,50	.53 / .57	
3	61,9	106,4	17	M16
	2,44	4,19	.67	
3-1/2	69,9	12,7	17	M16
	2,75	4,75	.67	
4	77,8	13,2	17	M16
	3,06	5,13	.67	
5	92,1	152,4	17	M16
	3,63	6,00	.67	

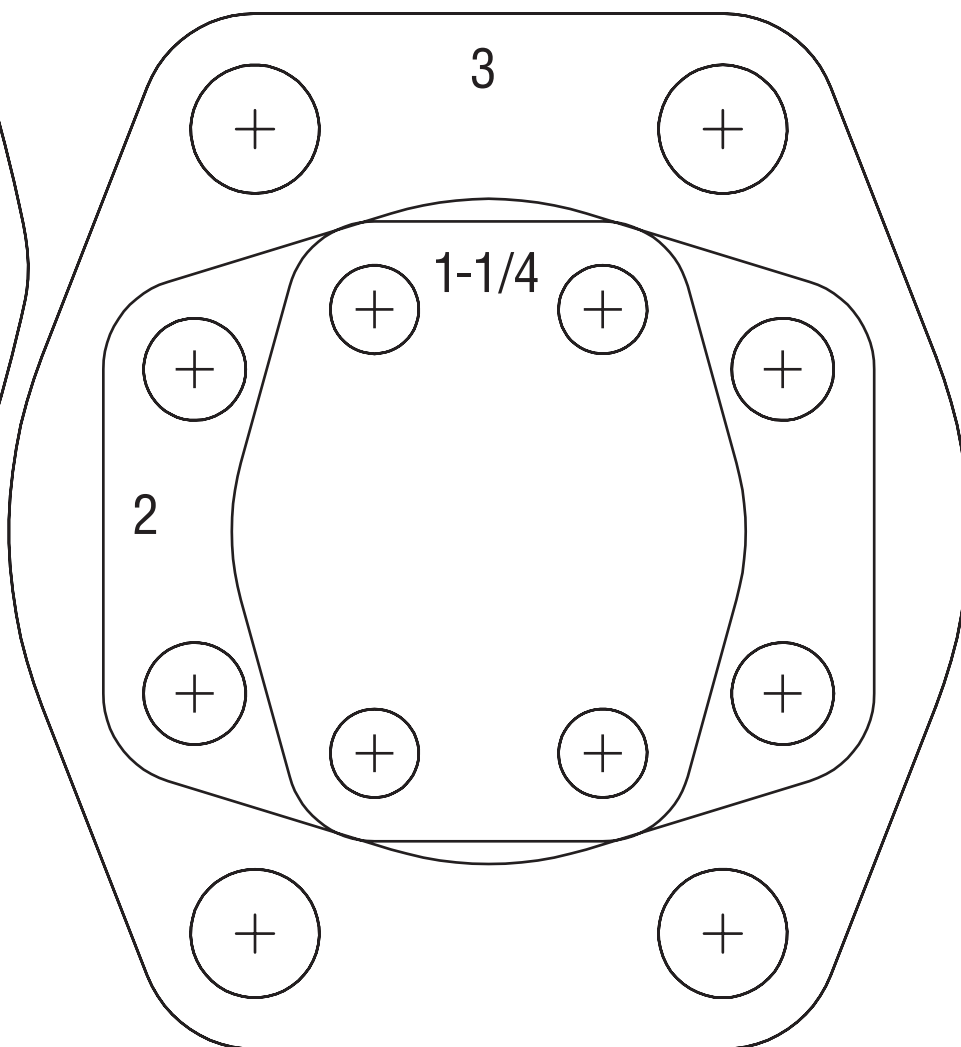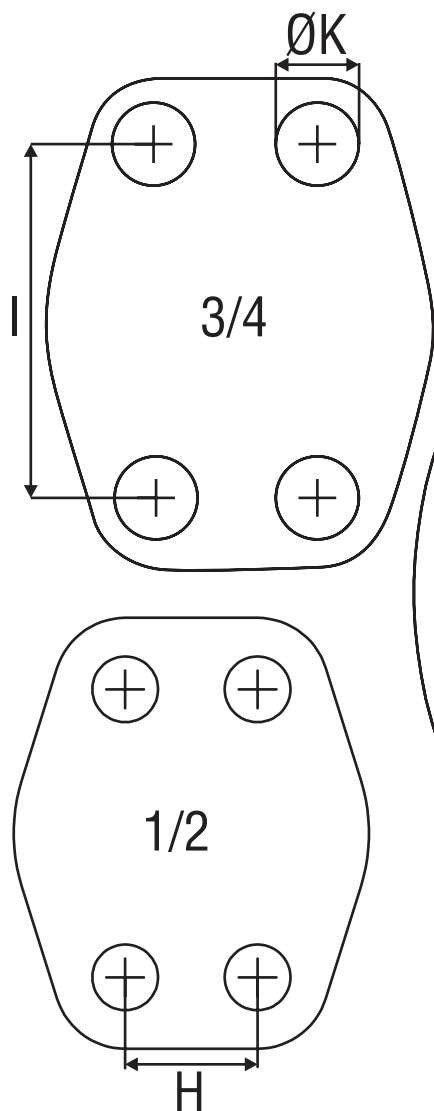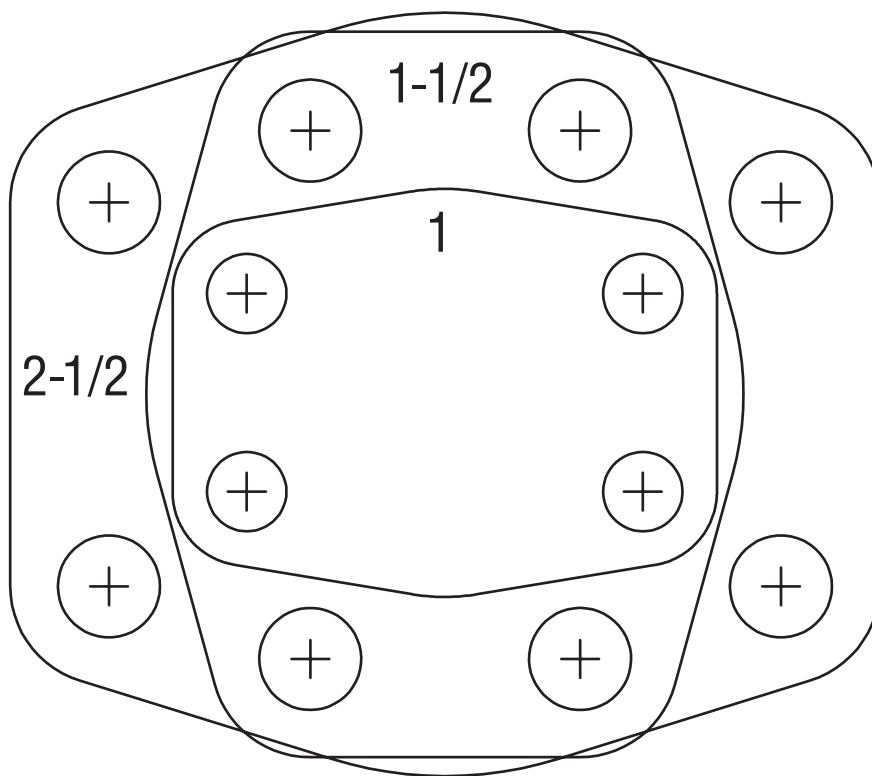

# Sizing Guide for SAE Flanges 6000 PSI High Pressure Series

Nominal Size SAE	Dimensions (mm/in)			
	H	I	ØK	Metric Threads
1/2	18,2	40,5	8,7	M8
	.72	1.59	.34	
3/4	23,8	50,8	10,5	M10
	.94	2.00	.41	
1	27,8	57,2	13	M12
	1.09	2.25	.51	
1-1/4	31,8	66,6	13,5 / 15,0	M12 / M14
	1.25	2.62	.53 / .59	
1-1/2	36,5	79,3	17	M16
	1.44	3.12	.67	
2	44,5	96,8	21	M20
	1.75	3.81	.83	

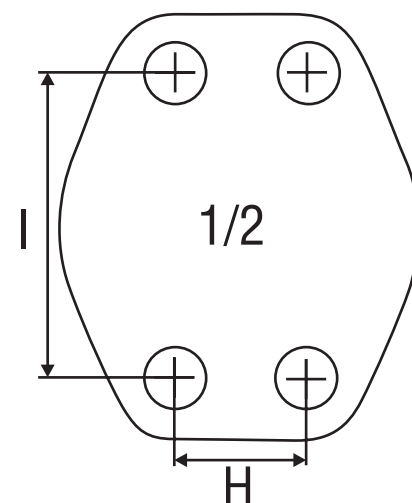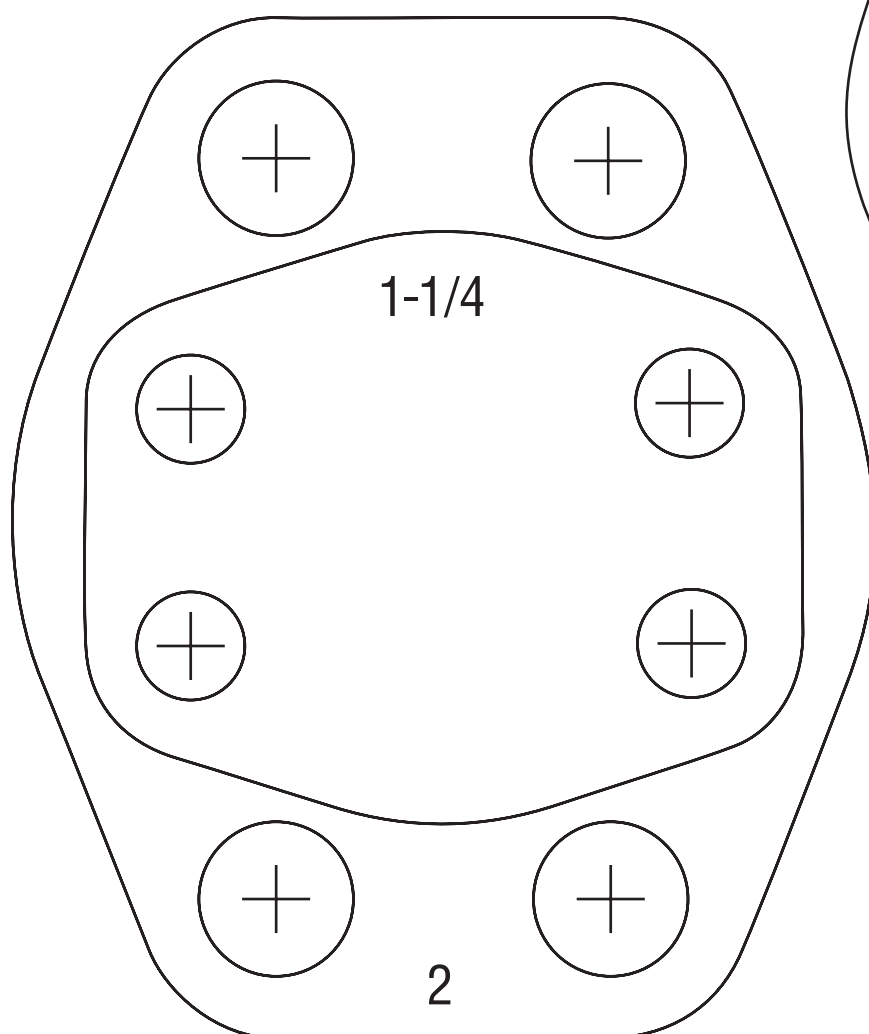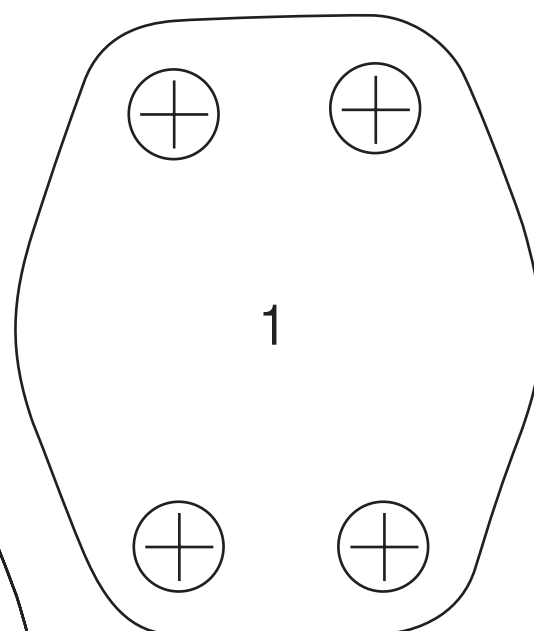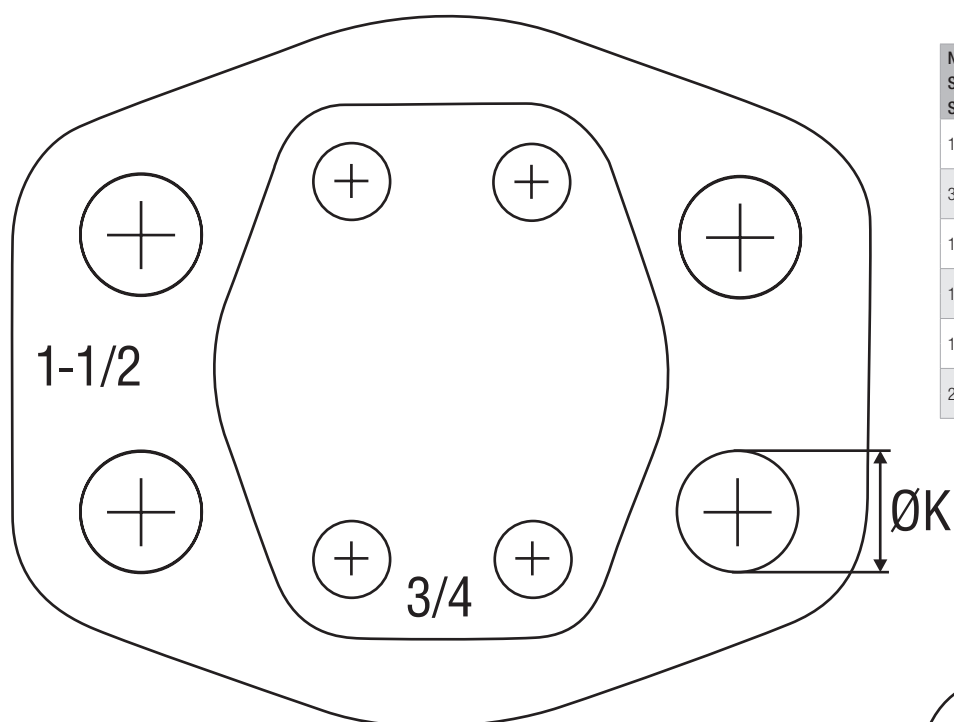

G







## Product-Specific Abbreviations

120

## Global Contact Directory


122



## Product-Specific Abbreviations

Abbreviation	Product Category	Product Description	Page
BAS-CP	Accessories for SAE Flanges	SAE Single-Part Blanking Counterflange	83
BAS-ES	SAE Flange / Counterflange Adaptors	SAE Single-Part Socket-Weld Counterflange	62
BAS-FL-ES	SAE Flange / Counterflange Adaptors	SAE Single-Part Socket-Weld Counterflange (Flat Style)	65
BAS-G	SAE Flange / Counterflange Adaptors	SAE Single-Part Counterflange with Female BSPP Thread	42
BAS-N	SAE Flange / Counterflange Adaptors	SAE Single-Part Counterflange with Female NPT Thread	46
BAS-SRE	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Counterflange for Metric Tubes	58
BAS-ST	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Counterflange for High Pressure Tubes	52
BAS-STRE	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Counterflange for Low Pressure Tubes	55
BC-L	SAE Flange Blocks	SAE Block L-Connection (Connector Style)	95
BC-T	SAE Flange Blocks	SAE Block T-Connection (Connector Style)	93
BF-L	SAE Flange Blocks	SAE Block L-Connection (Adaptor Style)	94
BF-L	SAE Flange Blocks	SAE Block L-Connection Reduction (Adaptor Style)	96
BF-T	SAE Flange Blocks	SAE Block T-Connection (Adaptor Style)	92
BFX90-ES	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Socket-Weld Flange	76
BFX90-G	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Flange with Female BSPP Thread	71
BFX90-L/S	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	78
BFX90-N	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Flange with Female NPT Thread	72
BFX90-SRE	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Butt-Weld Flange for Metric Tubes	74
BFX90-STC	SAE Flange / Counterflange Adaptors	SAE 90° Single-Part Butt-Weld Flange for High Pressure Tubes	73
BFX-B	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200)	68
BFX-BAS	Accessories for SAE Flanges	SAE Reducing Flange	88
BFX-CP	Accessories for SAE Flanges	SAE Single-Part Blanking Flange	82
BFX-ES	SAE Flange / Counterflange Adaptors	SAE Single-Part Socket-Weld Flange	60
BFX-FL-ES	SAE Flange / Counterflange Adaptors	SAE Single-Part Socket-Weld Flange (Flat Style)	64
BFX-G	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Female BSPP Thread	40
BFX-J	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Male UN/UNF Thread and 37° JIC Taper (acc. to ISO 8434-2 / SAE J514)	70
BFX-L/S	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	66
BFX-N	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Female NPT Thread	44
BFX-SRE	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Flange for Metric Tubes	56
BFX-ST	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Flange for High Pressure Tubes	50
BFX-STRE	SAE Flange / Counterflange Adaptors	SAE Single-Part Butt-Weld Flange for Low Pressure Tubes	54
BFX-U	SAE Flange / Counterflange Adaptors	SAE Single-Part Flange with Female UN/UNF Thread	48
BM	SAE Split Flange Halves / Flange Clamps	SAE Flange Clamp	16
BM-FL	SAE Split Flange Halves / Flange Clamps	SAE Flange Clamp (Flat Style)	19
BM-G	SAE Split Flange Halves / Flange Clamps	SAE Flange Clamp with Metric Tapped Holes	20
CAG90-L/S	SAE Single-Part Flanges / Counterflanges	SAE 90° Flange Adaptor with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	36
CAG90-ST	SAE Single-Part Flanges / Counterflanges	SAE 90° Butt-Weld Flange Adaptor	34
CAG-BP	Accessories for SAE Flanges	SAE Blindplug (Standard)	85
CAG-BPH	Accessories for SAE Flanges	SAE Blindplug (High)	85
CAG-ES	SAE Single-Part Flanges / Counterflanges	SAE Socket-Weld Flange Adaptor	26
CAG-L/S	SAE Single-Part Flanges / Counterflanges	SAE Flange Adaptor with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	32
CAG-N	SAE Single-Part Flanges / Counterflanges	SAE Flange Adaptor with Male NPT Thread	30
CAG-ST	SAE Single-Part Flanges / Counterflanges	SAE Butt-Weld Flange Adaptor	24
CAG-T	SAE Single-Part Flanges / Counterflanges	SAE Flange Adaptor with Male BSPT Thread	28
CPL	Accessories for SAE Flanges	SAE Cover Plate	87
CSG-ES	SAE Single-Part Flanges / Counterflanges	SAE Socket-Weld Counterflange Adaptor	26
CSG-N	SAE Single-Part Flanges / Counterflanges	SAE Counterflange Adaptor with Male NPT Thread	30
CSG-ST	SAE Single-Part Flanges / Counterflanges	SAE Butt-Weld Counterflange Adaptor	24
CSG-T	SAE Single-Part Flanges / Counterflanges	SAE Counterflange Adaptor with Male BSPT Thread	28
DB	SAE Split Flange Halves / Flange Clamps	SAE Split Flange Halves	14
DB-FL	SAE Split Flange Halves / Flange Clamps	SAE Split Flange Halves (Flat Style)	18
GP-FL-LK-G	Gear Pump Flanges	4-Hole Flange with Female BSPP Thread (Flat Style)	107
GP-LK-B	Gear Pump Flanges	4-Hole Flange with Male BSPP Thread and 60° Conical Bore (acc. to BS 5200)	109
GP-LK-G	Gear Pump Flanges	4-Hole Flange with Female BSPP Thread	110
GP-LK-L/S	Gear Pump Flanges	4-Hole Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	100
GP-LK-ST	Gear Pump Flanges	4-Hole Butt-Weld Flange	108
IS	Accessories for SAE Flanges	Socket Cap Bolt	89
KIT-BFX-IS	Accessories for SAE Flanges	Bolt Set	89
O-RING	Accessories for SAE Flanges	O-Ring	89
SPL	Accessories for SAE Flanges	SAE Sandwich Plate	86
SPL-G04-L	Accessories for SAE Flanges	SAE Sandwich Plate with Female BSPP Port	84
WP-3-LK-G	Gear Pump Flanges	3-Hole 90° Flange with Female BSPP Thread	103
WP-3-LK-G-W50	Gear Pump Flanges	3-Hole 90° Flange with Female BSPP Thread (Aluminium)	105
WP-3-LK-L/S	Gear Pump Flanges	4-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	101
WP-3-LK-L/S	Gear Pump Flanges	3-Hole 90° Flange with Male Metric Thread and 24° Conical Bore (Shape W acc. to DIN 3861)	102
WP-LK-G	Gear Pump Flanges	4-Hole 90° Flange with Female BSPP Thread	104
WP-LK-G-W50	Gear Pump Flanges	4-Hole 90° Flange with Female BSPP Thread (Aluminium)	106



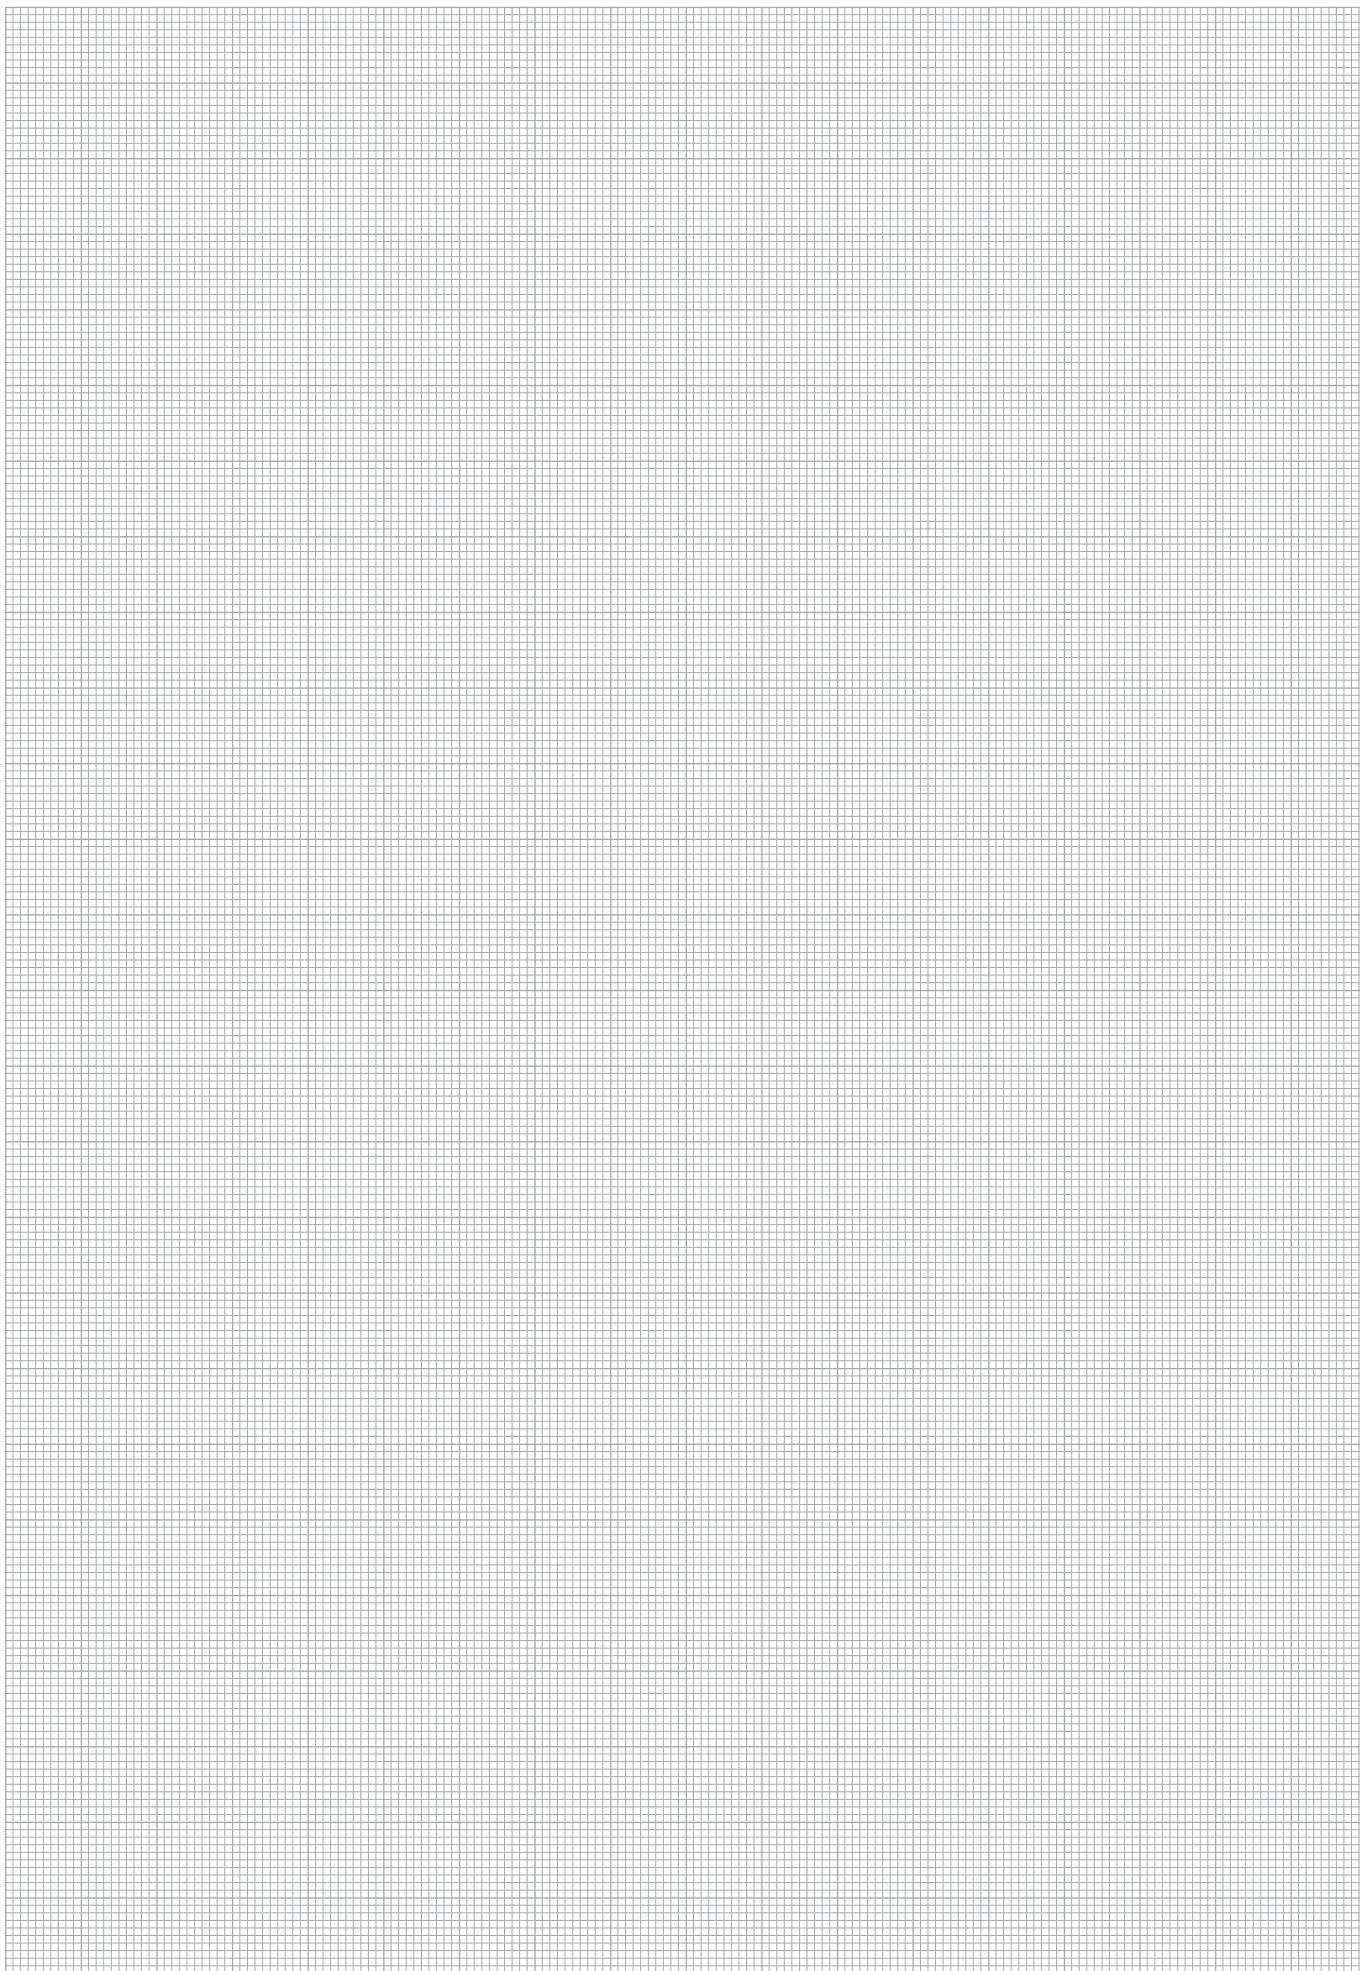

## Global Contact Directory

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

Contact information on this page may be subject to changes and additions over time. Frequently updated and complete contact information can always be found at [www.stauff.com](http://www.stauff.com).

### Germany



**Walter Stauffenberg GmbH & Co. KG**  
Im Ehrenfeld 4  
58791 Werdohl  
Tel.: +49 2392 91 60  
Fax: +49 2392 91 61 03  
E-Mail: [sales@stauff.com](mailto:sales@stauff.com)  
[www.stauff.com](http://www.stauff.com)



Neuenrade-Küntrop Logistics Centre  
Wasserburgstraße 35  
58809 Neuenrade



Plettenberg-Ohle Production Site  
Lennestraße 2  
58840 Plettenberg



Meinerzhagen Production Site  
Neugrünenthal  
58540 Meinerzhagen

### Europe

#### France

**STAUFF S.A.S.**  
230, Avenue du Grain d'Or  
Z.I. de Vineuil - Blois Sud  
41354 Vineuil-cedex  
Tel.: +33 2 54 50 55 50  
Fax: +33 2 54 42 29 19  
E-Mail: [direction@stauffsa.com](mailto:direction@stauffsa.com)  
[www.stauff.fr](http://www.stauff.fr)

#### Ireland

**STAUFF UK Ltd.**  
Block B, 9 Ferguson Drive  
Knockmore Hill Industrial Estate  
Lisburn, County Antrim, BT28 2EX  
Tel.: +44 2892 60 69 00  
Fax: +44 2892 60 26 88  
E-Mail: [sales@stauffireland.com](mailto:sales@stauffireland.com)  
[www.stauff.co.uk](http://www.stauff.co.uk)

#### Italy

**STAUFF Italia s.r.l**  
Via Borima 21 (Frazione Borima)  
23867 Suello (LC)  
Tel.: +39 031 65 84 94  
Fax: +39 031 65 50 05  
E-Mail: [sales@stauff.it](mailto:sales@stauff.it)  
[www.stauff.it](http://www.stauff.it)

#### Poland

**STAUFF Polska Sp. z o.o.**  
Miszewko 43 A  
80-297 Banino  
Tel.: +48 58 660 11 60  
Fax: +48 58 629 79 52  
E-Mail: [sales@stauff.pl](mailto:sales@stauff.pl)  
[www.stauff.pl](http://www.stauff.pl)

### Russian Federation

**STAUFF LLC**  
Building 1  
19, Leninskaya Sloboda  
Moscow, 115280  
Tel.: +7 495 276 16 50  
Fax: +7 495 276 16 51  
E-Mail: [sales@stauff.ru](mailto:sales@stauff.ru)  
[www.stauff.ru](http://www.stauff.ru)

Further branch offices in  
Engels, Volzhskiy, Magnitogorsk,  
Nizhny Novgorod and St. Petersburg.

### United Kingdom

**STAUFF UK Ltd.**  
500, Carlisle Street East  
Off Downgate Drive  
Sheffield, S4 8BS  
Tel.: +44 114 251 85 18  
Fax: +44 114 251 85 19  
E-Mail: [sales@stauff.co.uk](mailto:sales@stauff.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)

**STAUFF UK Ltd.**  
Badentoy Avenue  
Badentoy Industrial Estate  
Portlethen, Aberdeen, AB12 4YB  
Tel.: +44 1224 78 61 66  
Fax: +44 1224 78 61 77  
E-Mail: [sales@stauffscotland.co.uk](mailto:sales@stauffscotland.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)

**STAUFF UK Ltd.**  
Unit 9, Southampton Trade Park  
Third Avenue, Millbrook  
Southampton, SO15 0AD  
Tel: +44 2380 69 87 00  
Fax: +44 2380 69 87 01  
E-Mail: [sales@stauffsouthampton.co.uk](mailto:sales@stauffsouthampton.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)

### North America

#### Canada

**STAUFF Canada Ltd.**  
866 Milner Avenue  
Scarborough  
Ontario M1B 5N7  
Tel.: +1 416 282 46 08  
Fax: +1 416 282 30 39  
E-Mail: [sales@stauffcanada.com](mailto:sales@stauffcanada.com)  
[www.stauffcanada.com](http://www.stauffcanada.com)

#### United States

**STAUFF Corporation**  
7 Wm. Demarest Place  
Waldwick, 07463-1542  
New Jersey  
Tel.: +1 201 444 78 00  
Fax: +1 201 444 78 52  
E-Mail: [sales@stauffusa.com](mailto:sales@stauffusa.com)  
[www.stauffusa.com](http://www.stauffusa.com)

Further branch office in  
Canton, Michigan.


### South America

#### Brazil

**STAUFF Brasil Ltda.**  
Avenida Gupê 10767  
Galpão 2 - Bloco A  
Barueri, São Paulo, CEP 06422-120  
Tel.: +55 11 47 72 72 00  
Fax: +55 11 47 72 72 10  
E-Mail: [stauff@stauffbrasil.com](mailto:stauff@stauffbrasil.com)  
[www.stauffbrasil.com](http://www.stauffbrasil.com)



## Global Contact Directory

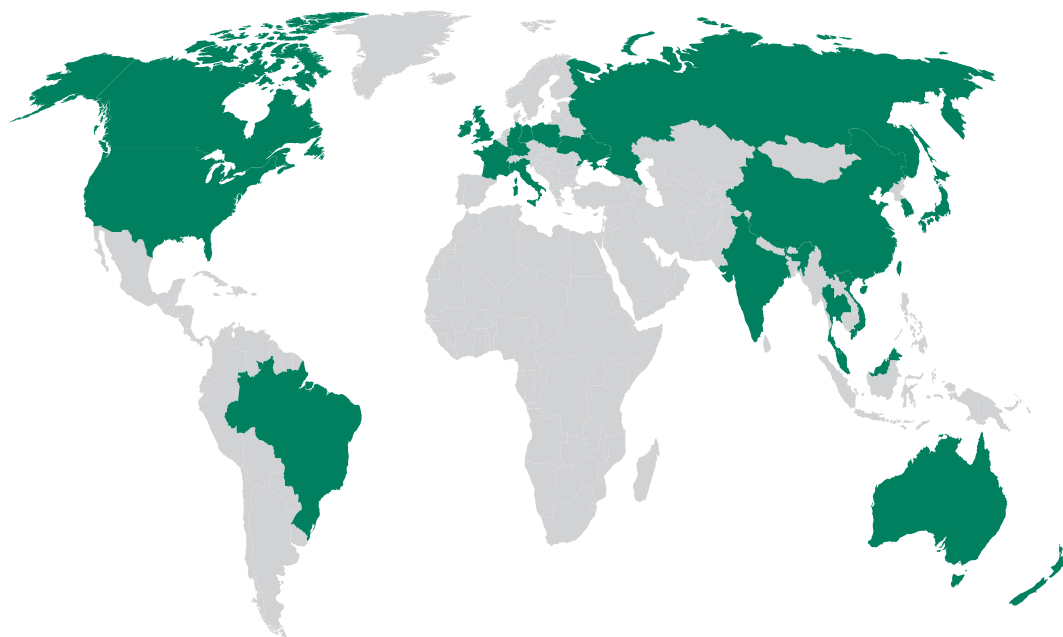

## Asia

## China

**STAUFF CHINA**

Building 1, No. 128, Die Qiao Road  
Jushuo Industrial Zone, Kang Qiao  
Shanghai, 201319  
Tel.: +86 21 68 18 70 00  
Fax: +86 21 68 18 71 36  
E-Mail: [info@stauff.com.cn](mailto:info@stauff.com.cn)  
[www.stauff.com.cn](http://www.stauff.com.cn)

Further branch offices in Beijing,  
Changsha, Chengdu, Changchun,  
Chongqing, Jinan, Harbin, Guangzhou,  
Shenyang, Wuhan, Xian and Xuzhou.

## India

**STAUFF India Pvt. Ltd.**

Gat no. 26/1 & 27, Sanghar Warehousing  
Pune - Nagar Road  
Lonikand - 412216  
Tel.: +91 20 6731 4900  
Fax: +91 20 6731 4905  
E-Mail: [sales@stauffindia.com](mailto:sales@stauffindia.com)  
[www.stauffindia.com](http://www.stauffindia.com)

## Korea

**STAUFF Korea Ltd.**

105, Hwajeonsandan 5-ro  
Gangseo-gu  
Busan, 46739  
Tel.: +82 51 266 6666  
Fax: +82 51 266 8866  
E-Mail: [info@stauff.co.kr](mailto:info@stauff.co.kr)  
[www.stauff.co.kr](http://www.stauff.co.kr)

## Malaysia

**STAUFF South East Asia Sdn Bhd**

No. 8, Jalan SS13/6A  
Subang Jaya Industrial Estate  
47500 Subang Jaya  
Tel.: +60 3 5637 78 88  
Fax: +60 3 5636 78 90  
E-Mail: [sales@stauff.com.my](mailto:sales@stauff.com.my)  
[www.stauff.com.my](http://www.stauff.com.my)

## Thailand

**STAUFF (Thailand) Co., Ltd.**

10 Soi On-Nut 74/4  
Pravet District  
Bangkok 10250  
Tel.: +66 2 721 73 23 / 24  
Fax: +66 2 721 73 35  
E-Mail: [sales@stauff.co.th](mailto:sales@stauff.co.th)  
[www.stauff.co.th](http://www.stauff.co.th)

## Vietnam

**STAUFF Vietnam Ltd.**

2nd Floor, CT-IN Building  
#435 Hoang Van Thu Street  
Tan Binh District, Ho Chi Minh City  
Tel.: +84 8 3948 10 41 / 42  
Fax: +84 8 3948 10 44  
E-Mail: [sales@stauff.com.vn](mailto:sales@stauff.com.vn)  
[www.stauff.com.vn](http://www.stauff.com.vn)

## Oceania

## Australia

**STAUFF Corporation Pty Ltd**

24-26 Doyle Avenue  
Unanderra NSW 2526

Tel.: +61 2 4271 9000  
Fax: +61 2 4271 8432  
E-Mail: [sales@stauff.com.au](mailto:sales@stauff.com.au)  
[www.stauff.com.au](http://www.stauff.com.au)

Further branch offices in  
Adelaide, Brisbane, Melbourne  
and Sydney.

## New Zealand

**STAUFF Corporation (NZ) Ltd.**

Unit D, 103 Harris Road  
East Tamaki, Auckland 2013

Tel.: +64 9 271 48 12  
Fax: +64 9 271 48 32  
E-Mail: [sales@stauff.co.nz](mailto:sales@stauff.co.nz)  
[www.stauff.co.nz](http://www.stauff.co.nz)





Introduction

SAE Split Flange Halves / Flange Clamps

SAE Flange / Counterflange Adaptors

SAE Single-Part Flanges / Counterflanges

Accessories for SAE Flanges

SAE Flange Blocks


Gear Pump Flanges

Assembly Instructions

Appendix



## Catalogue 3 STAUFF Flanges

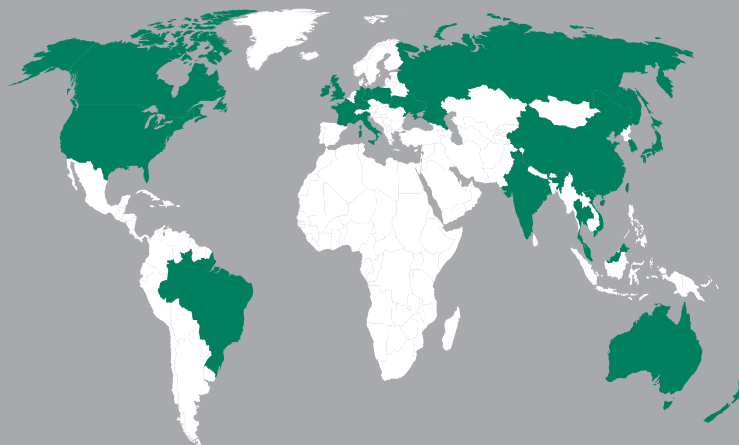

### Germany

Walter Stauffenberg GmbH & Co. KG  
Im Ehrenfeld 4  
58791 Werdohl  
Tel.: +49 2392 91 60  
Fax: +49 2392 91 61 03  
E-Mail: [sales@stauff.com](mailto:sales@stauff.com)

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

You can find detailed contact information on the last two pages of this product catalogue or at

**[www.stauff.com](http://www.stauff.com)**