

SEALED SWITCH MODULE

SELF-CONTAINED, LONG-LIFE, SEALED SWITCH MODULE WITH UP TO 5 POSITIONS

The TC is a self contained, sealed switch module with up to 5 positions. It can be utilized in numerous applications that require a compact switch module and long life.

At slightly over an inch in diameter, it can be used in a grip, front panel, or hand held device, just to name a few applications. It is available in either a top mount or rear mount.

The advantage of the TC switch module is that it incorporates keypad functionality within a very small footprint. Standard or custom legends are available and can be LED backlit.

Standard termination options include flying leads, ribbon cable (with or without AMP connector) and FFC (flexible flat cable). Tested to three million cycles, the TC switch module has an operating temperature range of -40°C to 85°C and it is sealed to IP68S.

The TC can be used in panel or grip applications and is especially useful in cursor control or data entry applications. Applications include construction, agriculture, industrial, material handling and medical.





TC Standard Characteristics/Ratings:	
ELECTRICAL RATINGS:	1-28 VDC @ Sea Level
Load:	10-100mA Resistive
Electrical Life:	3,000,000 cycles
LED Voltage Rating:	2.0 VDC
Mechanical Life:	3,000,000 cycles
Seal:	IP68S
Operating Temp Range:	-40°C to +85°C
Operating Force:	1.0 +/- .5 lbs.
Pushout Force:	5 lbs. min.
MATERIALS:	
Housing:	PBT
Keypad:	Silicone Rubber
Terminal Hardware:	None provided
Mounting Hardware:	VHB tape

Features:

- **Watertight to IP68S**
- **Great for grips and panels**
- **3 million cycle electrical life**
- **LED backlight option**



TC Switch Module Keypad Configurations

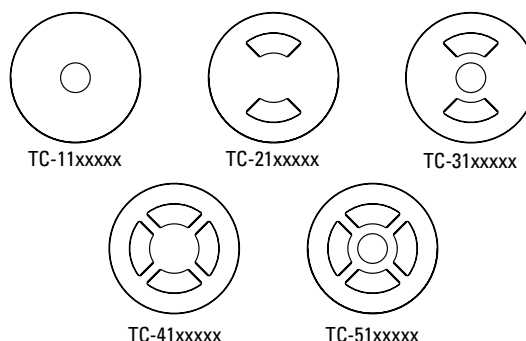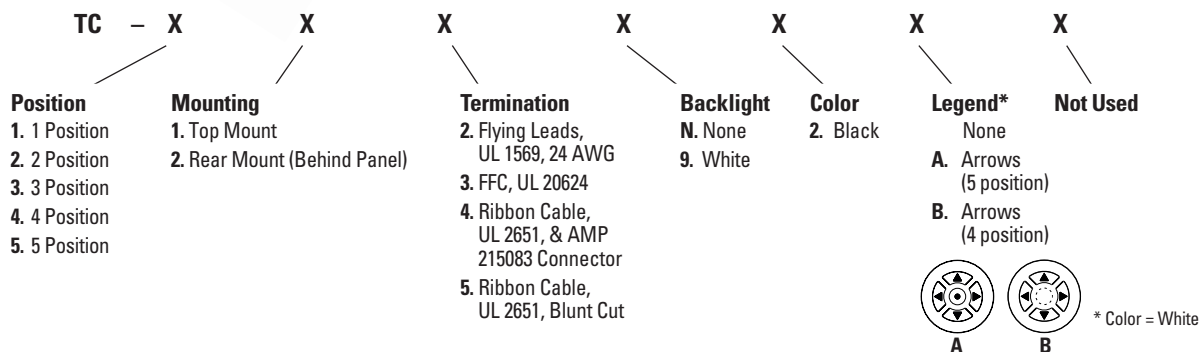**TC PART NUMBER CODE**





SEALED SWITCH MODULE

TC
SWITCH
MODULE


SELF-CONTAINED, LONG-LIFE, SEALED SWITCH MODULE WITH UP TO 5 POSITIONS

TC-51xxxxx

Top Mount, 5 Position Module

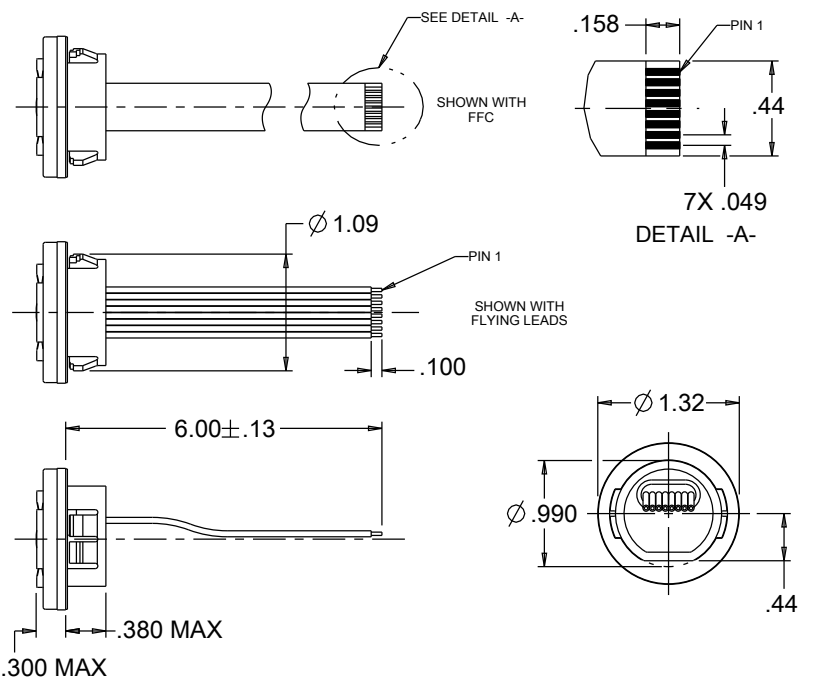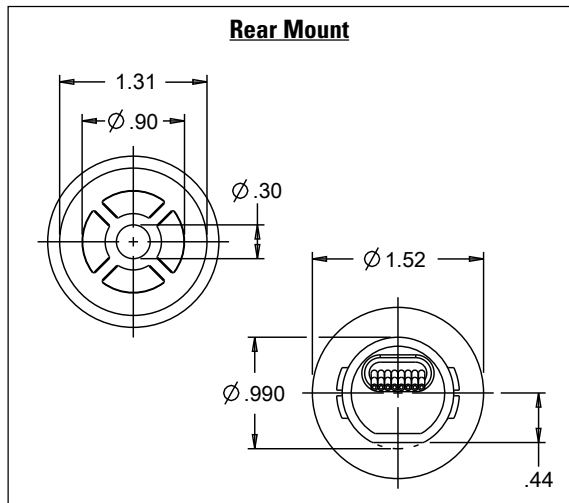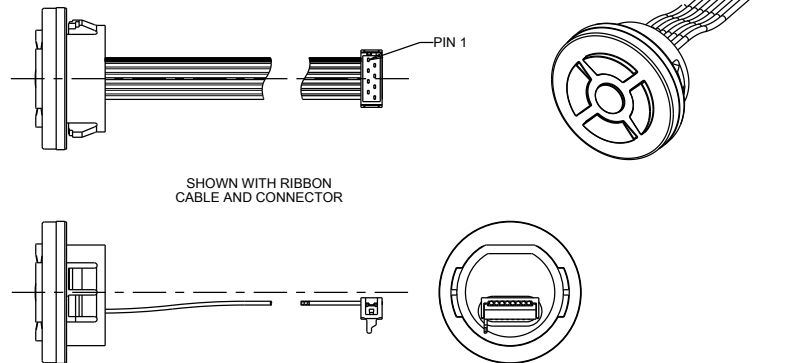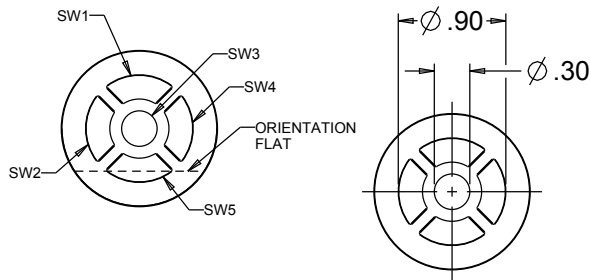

Standard Legend Configurations

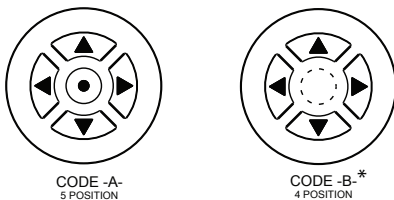

*Available with TC-4
and TC-5 versions

Schematic with optional LED circuit shown

