



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding





# ADS50 Sensors

Catalog HY33-2364/US





**ENGINEERING YOUR SUCCESS.** 



### **Application**

The ADS50 analog sensor belongs to the Parker family of accessories provided to complement electronic control systems. The ADS50 is a 0-5V output, non-contact, analog sensor for mobile hydraulic applications. The sensor is lever actuated and provides a linear output over 25 mm [1.0"] of travel. The ADS50 has twelve inch leads and an attached Deutsch connector. To make the sensor suitable for mobile equipment, we have focused upon properties such as reliability and ease of installation.


### **Properties**

### Reliability

The ADS50 has a glass-filled nylon plastic construction for strength and corrosion resistance. The sensor uses non-contact, Hall-effect technology for trouble free operation. The sensor is very robust and able to withstand rugged applications.

### Installation

The ADS50 is well designed for the mobile hydraulics industry. The 3 pin connector is a sealed Deutsch DTM type designed for automotive use. This connector, combined with potted electronics, gives the sensor IP66 protection for exposed outdoor applications. The mounting holes are extra large for easy alignment. These features provide for easy installation and removal, even in field conditions.

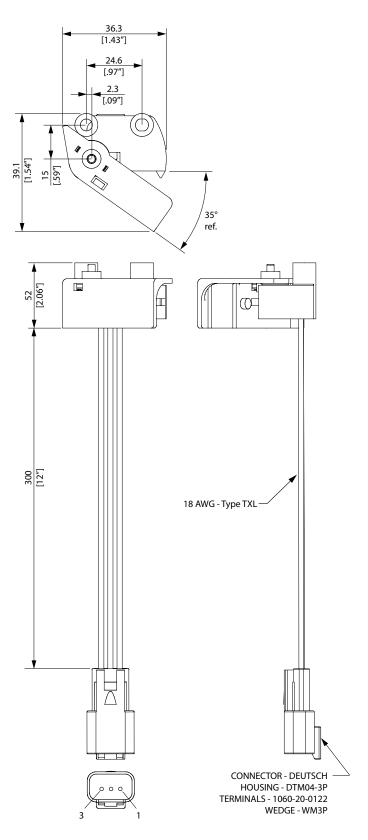





General

Weight 39 g

Temperature range -40°C to 85°C
Operating life 1 million cycles
Linearity Max ±5.0% FS

Repeatibility ±1.0%

**Mechanical characteristics** 

Linear travel 25 mm [1.0"]
Connector Deutsch DTM

**Electrical specifications** 

Supply Voltage(Vs) 5.0 Vdc
Current supply Max 12.0 mA
Output fully closed 90% Vs
Output fully open 10% Vs
Output current Max. 1.0 mA

Ordering part number

ADS50 01710

### **Environmental protection**

Mechanical

Shock 1m drop Vibration 30 Gs

Climate

Sealing (electronics) IP66

**Chemical environment** 

Liquids (resistance) standard automotive



### WARNING - USER RESPONSIBILITY

### FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide
  product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.



### OFFER OF SALE

Please contact your Parker representative for a detailed "Offer of Sale".



### Sales Offices Worldwide

### **North America**

### **Hydraulics Group Headquarters**

6035 Parkland Boulevard Cleveland, OH 44124-4141 USA

Tel: 216-896-3000 Fax: 216-896-4031

### Parker Hannifin Canada Motion & Control Division – Milton

160 Chisholm Drive Milton Ontario Canada L9T 3G9 Tel: 905-693-3000 Fax: 905-876-1958

#### Mexico

#### Parker Hannifin de México

Av eje uno norte num 100 Parque Industrial Toluca 2000 Toluca, Mex C.P. 50100 Tel: 52 722 2754200 Fax: 52 722 2799308

Europe

# Europe Hydraulics Group Parker Hannifin Corporation

Parker House 55 Maylands Avenue Hemel Hempstead, Herts HP2 4SJ England

Tel: 44 1442 458000 Fax: 44 1442 458085

### **Latin America**

### Brazil

### Hydraulics Division Parker Hannifin Ind. e Com. Ltda

Av. FredericoRitter, 1100 Cachoeirinha RS, 94930-000 Brazil

Tel: 55 51 3470 9144 Fax: 55 51 3470 3100

### **Mobile Sales**

### Mobile Sales Organization and Global Sales

850 Arthur Avenue Elk Grove Village, IL 60007 USA Tel: 847-258-6200

Fax: 847-258-6299

### **Industrial Sales**

### **Great Lakes Region**

3700 Embassy Parkway Suite 260

Fairlawn, OH 44333 USA Tel: 330-670-2680 Fax: 330-670-2681

#### Southern Region

1225 Old Alpharetta Road Suite 290 Alpharetta, GA 30005 USA Tel: 770-619-9767

Chicago Region

Fax: 770-619-9806

1163 E. Ogden Avenue Suite 705, #358 Naperville, IL 60563 USA

Tel: 630-964-0796 Fax: 866-473-9274

#### **Pacific Region**

8460 Kass Drive Buena Park, CA 90621 Tel: 714-228-2510 Fax: 714-228-2511

#### **Eastern Region**

100 Corporate Drive Lebanon, NJ 08833 USA Tel: 908-236-4121 Fax: 908-236-4146

### **Asia Pacific**

### Asia Pacific Headquarters Parker Hannifin Hong Kong Ltd

8/F, Kin Yip Plaza 9 Cheung Yee Street HK-Cheung Sha Wan, Hong Kong

Tel: 852 2428 8008 Fax: 852 2425 6896

### Australia Headquarters Parker Hannifin Pty Ltd.

9 Carrington Road Castle Hill, NSW 2154, Australia

Tel: 612 9634 7777 Fax: 612 9842 5111

### China Headquarters

# Parker Hannifin Motion & Control (Shanghai) Co., Ltd

280 Yunqiao Road, Jin Qiao Export Processing Zone CN-Shanghai 201206, China

Tel: 86 21 5031 2525 Fax: 86 21 5834 3714

## Korea Headquarters Parker Hannifin Korea Ltd

6F Daehwa Plaza 169 Samsung-dong, Gangnam-gu KR-Seoul, 135-090, Korea

Tel: 82 2 559 0400 Fax: 82 2 556 8187

### **South Africa**

### Parker Hannifin Africa Pty Ltd Parker Place

10 Berne Avenue Aeroport P.O. Box 1153 ZA-Kempton Park 1620, Republic of South Africa Tel: 27 11 961 0700

Fax: 27 11 392 7213

© 2008-2012 Parker Hannifin Corporation. All rights reserved.



Parker Hannifin Corporation Electronic Controls Division 56641 Twin Branch Dr. Mishawaka, IN, 46545 USA phone 574 256 6630 HY33-2364/US

10/2012