Penny+Giles
A Curtiss-Wright Company

The **Penny+Giles ICT050 Contactless In-Cylinder Linear Transducer** has been specifically designed for small bore mobile and static hydro-pneumatic actuators.

Designed primarily for the off-highway markets, the ICT050 linear transducer provides reliable, fit-and-forget position sensing of the cylinder rod in actuators with strokes up to 500mm.

It is a robust, non-contact transducer suitable for the harsh conditions of lifting and steering position applications and hydro-pneumatic active suspension systems. It works on an inductive coil principle, with virtually infinite resolution and is capable of withstanding temperatures up to 200°C and working pressures up to 500Bar.

ICT050

IN-CYLINDER LINEAR TRANSDUCER

www.pennyandgiles.com

Penny & Giles Controls Ltd
15 Airfield Road
Christchurch
Dorset BH23 3TG
United Kingdom
+44 (0) 1202 409409
+44 (0) 1202 409475 Fax
sales@pennyandgiles.com

Penny & Giles USA
665 North Baldwin Park Boulevard
City of Industry
CA 91746
USA
+1 626 480 2150
+1 626 369 6318 Fax
us.sales@pennyandgiles.com

www.penny-giles.de

Penny & Giles GmbH
Straussenlettenstr. 7b
85053
Ingolstadt
Germany
+49 (0) 841 885567-0
+49 (0) 841 885567-67 Fax
info@penny-giles.de

GS GLOBAL RESOURCES
Foremost in Machine Performance for Life

GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149

© GS GLOBAL REOURCES, INC. ALL RIGHTS RESERVED.

METRIC
IF IN DOUBT ASK

ISS	DATE	DRAWN	ECR No.	CHK	APP
9	08/02/11	S COLE	10426/22	M BENTLEY	M BENTLEY

GLOBAL RESOURCES
Foremost in Machine Performance for Life

GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149

© GS GLOBAL REOURCES, INC. ALL RIGHTS RESERVED.

THREAD DETAILS		
THREADED & REVERSE	METRIC THREAD	UNIFIED THREAD
THREADED FLANGE	M10x1.0	3/8"-24 UNF
CORE ASSEMBLY	M5x0.8	.190-32 UNF

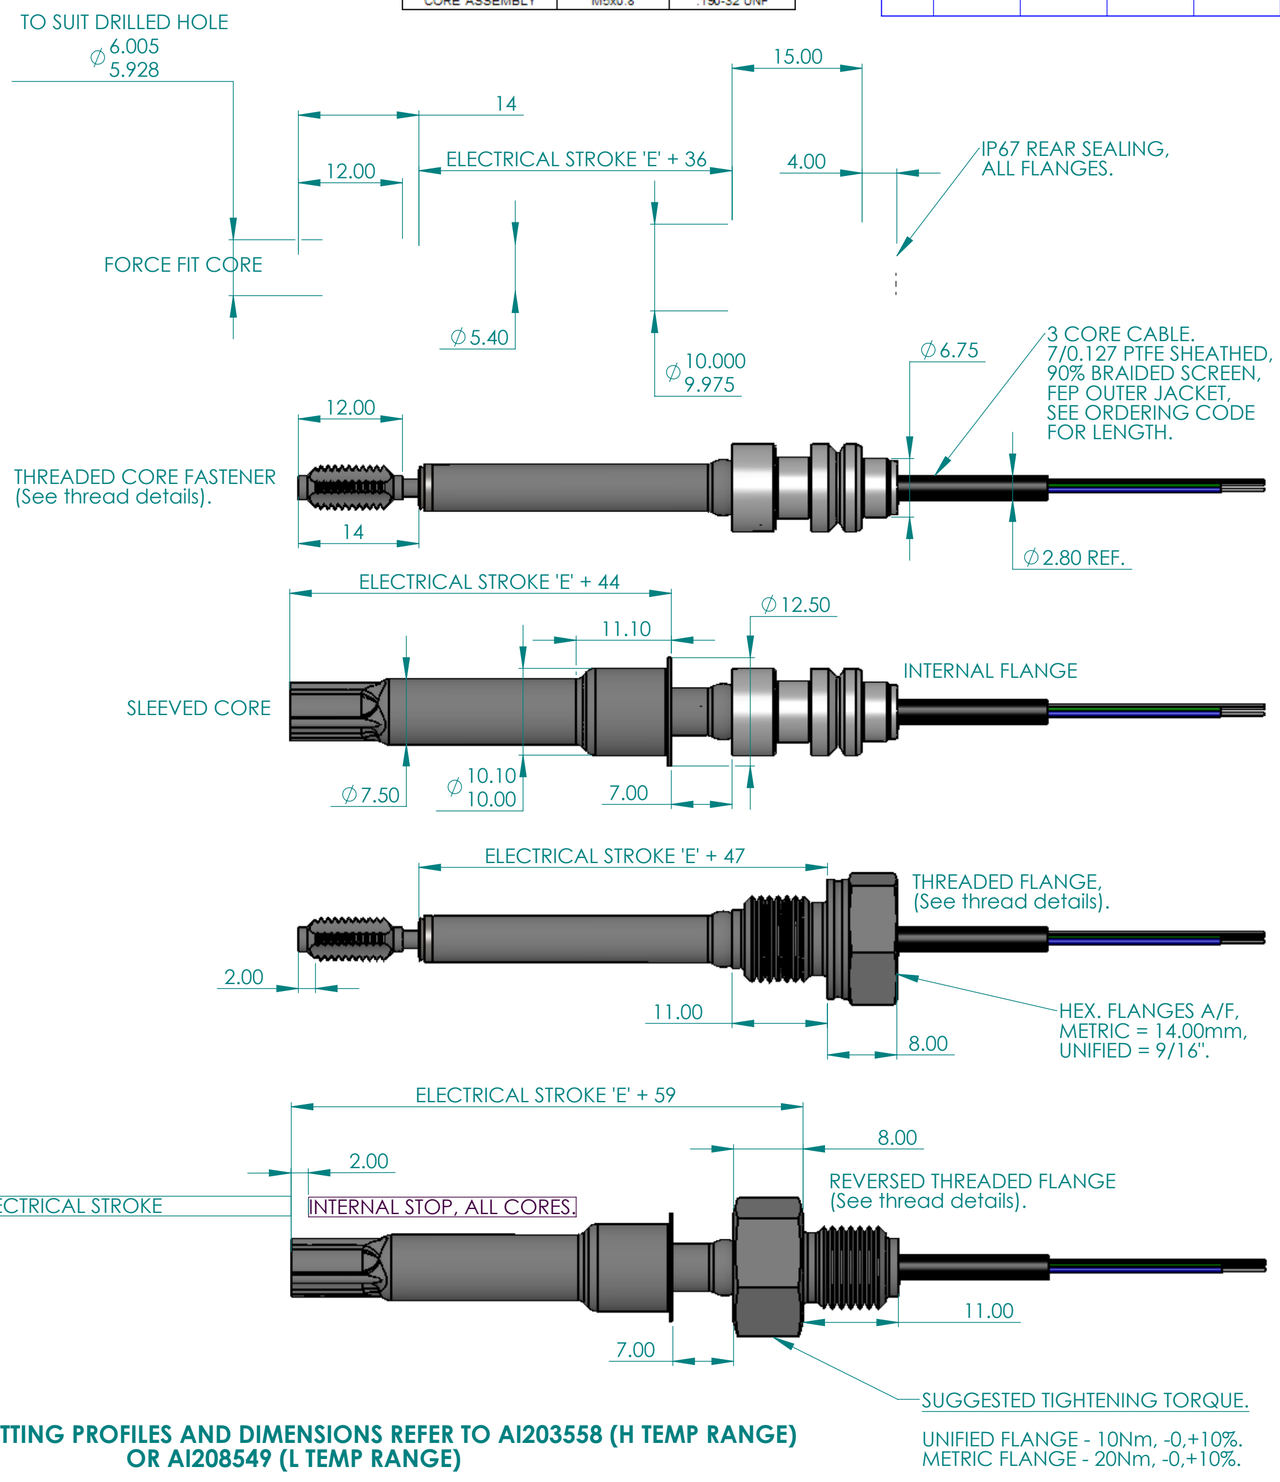

ORDERING CODE THREADED FLANGE

ICT 050/__/__/___/__/__

FLANGE OPTION
EM =EXTERNAL METRIC FLANGE
EU =EXTERNAL UNIFIED FLANGE
RM =REVERSED THREADED METRIC FLANGE
RU =REVERSED THREADED UNIFIED FLANGE

CORE OPTION
SC = SLEEVED CORE
TU = THREADED CORE UNIFIED
TM = THREADED CORE METRIC
FF = FORCE FIT

STROKE LENGTH 'E' IN mm

TEMPERATURE RANGE (OPERATING)
H = -20°C TO +200°C
L = -55°C TO +120°C

CABLE OPTION
P5 = 0.5m CABLE
01 = 1.0m CABLE
06 = 6.0m CABLE

ORDERING CODE INTERNAL FLANGE

ICT 050/__/__/____/__/__

FLANGE OPTION
IN =INTERNAL FLANGE

CORE OPTION
SC = SLEEVED CORE
TM = THREADED CORE METRIC
TU = THREADED CORE UNIFIED
FF = FORCE FIT

STROKE LENGTH 'E' IN mm

TEMPERATURE RANGE (OPERATING)
H = -20°C TO +200°C
L = -55°C TO +120°C

CABLE OPTION
P5 = 0.5m CABLE
01 = 1.0m CABLE
06 = 6.0m CABLE

FOR SUGGESTED FITTING PROFILES AND DIMENSIONS REFER TO AI203558 (H TEMP RANGE) OR AI208549 (L TEMP RANGE)

SCALE UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL.		D No.	MATERIAL	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS SS-301 SURFACE TEXTURE VALUES IN MICROMETRES (.m) 1.6 TO BS1134:PT2. ALL MACHINED SURFACES TO BE ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H ANGULAR ± 1° LINEAR 0. mm 0.0 mm 0.00mm 0.000mm (MACHINING) +/- 0.5 mm +/- 0.2 mm +/- 0.1mm +/- 0.01mm BREAK EDGE 0.05 - 0.15mm FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED	TITLE IN CYLINDER TRANSDUCER	PENNY + GILES	A2
THIRD ANGLE PROJECTION TO BS 8888	MASS (g)	VOL. (mm³)	REF.	FINISH CLEAN		PART NUMBER: ICT050	SHT 1 OF 1 SHTS	SolidWorks

REPRODUCTION OF ANY PART OF THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR PERMISSION FROM PENNY & GILES. © DESIGN COPYRIGHT RESERVED. CONFIDENTIAL AND PROPRIETARY INFORMATION OF PENNY & GILES.

PISTON ROD END DETAIL TO ASSIST
BLIND LOADING OF LONGER STROKE
INTERNAL FLANGE OPTIONS

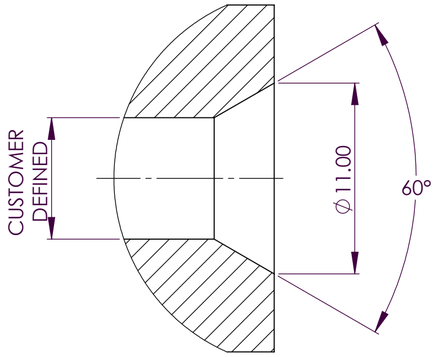

ITEM NO.	DESCRIPTION	P&G PART No.	QTY.
1	THIN NUT M5x0.8	X63-072-050	1
2	FULL NUT 0.190-32 UNF	X63-111-003	1
3	WAVEY WASHER - ELP2	X63-112-002	2
4	SHIM WASHER	P55044/3	1
5	CIRCLIP D1300-0130	X69-005-109	1
6	O'RING BROWN(7.65x1.63)	X64-194-114	1
7	O'RING (8.1x1.6)	X64-194-015	1
8	O'RING (7x2)	X64-194-016	1
9	ANTI EXTRUSION RING	X64-081-001	1
10	M3x0.5 CONICAL SET SCREW	X63-096-305	1
11	COPY OF AI203558	AI203558	1
12	LABEL (SUPPLIED LOOSE)	P200919	1
13	INSTALATION KIT LABEL	P204986	1
14	ALTERNATE CABLE GLAND SEAL	X61-213-202	1

ITEM 12, LABEL, IS SUPPLIED FOR THE CUSTOMER TO RECORD ICT ORDERING CODE AND TO BE FITTED IN VISIBLE LOCATION ADJACENT TO SENSOR FOR RE-ORDERING REFERENCE.

ITEM 14, ALTERNATE CABLE GLAND SEAL, IS SUPPLIED FOR CONNECTING ICT050 DIRECT TO EICTM.

BECAUSE OF THE MULTIPLICITY OF POTENTIAL APPLICATION, THE INSTALLATION DETAILS SHOWN ARE SUGGESTIONS ONLY. THE USER SHOULD ENSURE THAT THE DESIGN, METHOD OF ASSEMBLY AND MATERIALS USED ARE SATISFACTORY FOR THE INSTALLATION.

GS GLOBAL RESOURCES
Foremost in Machine Performance for Life
GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149
© GS GLOBAL REOURCES, INC. ALL RIGHTS RESERVED.

INTERNAL FLANGE
MACHINING DETAILS

TO SEAL USE ITEMS 8 & 9

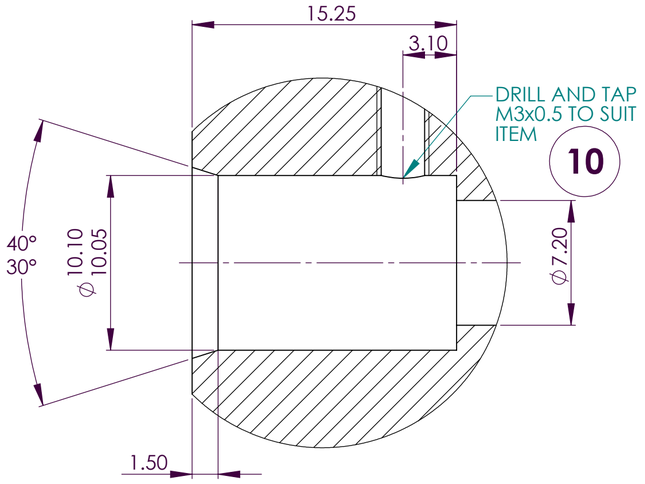

MACHINING DETAILS FOR UNIFIED FLANGE.
PORT CONFORMS TO SAE J1926/1, CONNECTIONS FOR FLUID POWER AND GENERAL USE - PORTS AND STUD ENDS WITH ISO 725 THREADS AND O'RING SEALING - PART 1: THREADED PORTS WITH O'RING SEAL IN TRUNCATED HOUSING

SUITABLE PORT CUTTERS ARE AVAILABLE FOR THESE DETAILS.....

TO SEAL USE ITEM 6

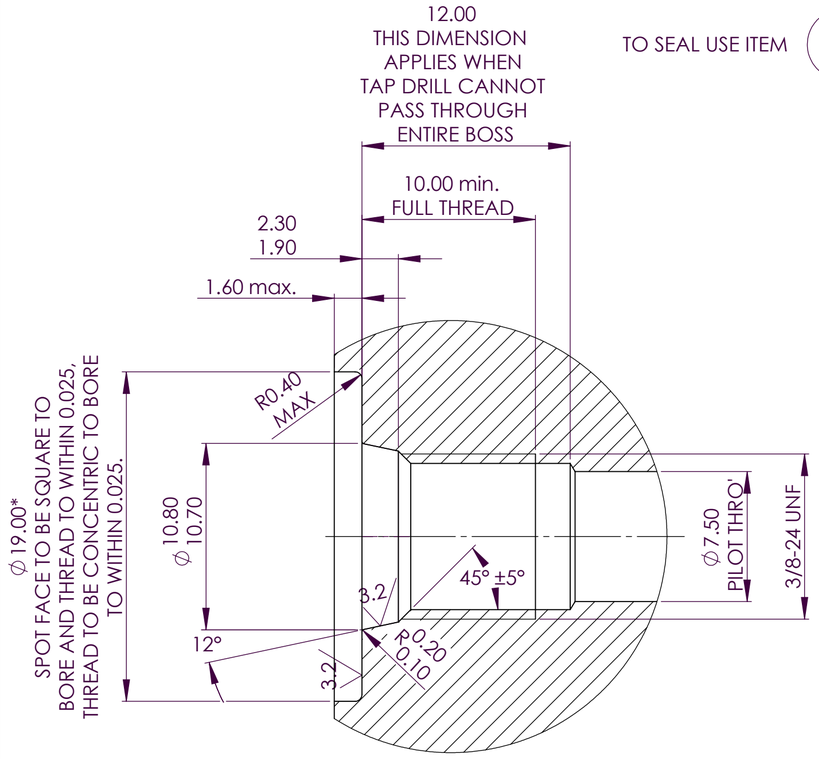

* IF FACE OF PORT IS MACHINED DIMENSIONS ø19.00 x 1.6 max NEED NOT APPLY AS LONG AS R0.2/0.1 IS MAINTAINED TO AVOID DAMAGE TO O-RING DURING INSTALATION.

MACHINING DETAILS FOR METRIC FLANGE.
PORTS CONFORM TO ISO 6149-1:1993, CONNECTIONS FOR FLUID POWER AND GENERAL USE - PORTS AND STUD ENDS WITH ISO 261 THREADS AND O'RING SEALING - PART 1: PORTS WITH O'RING SEAL IN TRUNCATED HOUSING

SUITABLE PORT CUTTERS ARE AVAILABLE FOR THESE DETAILS.....

TO SEAL USE ITEM 7

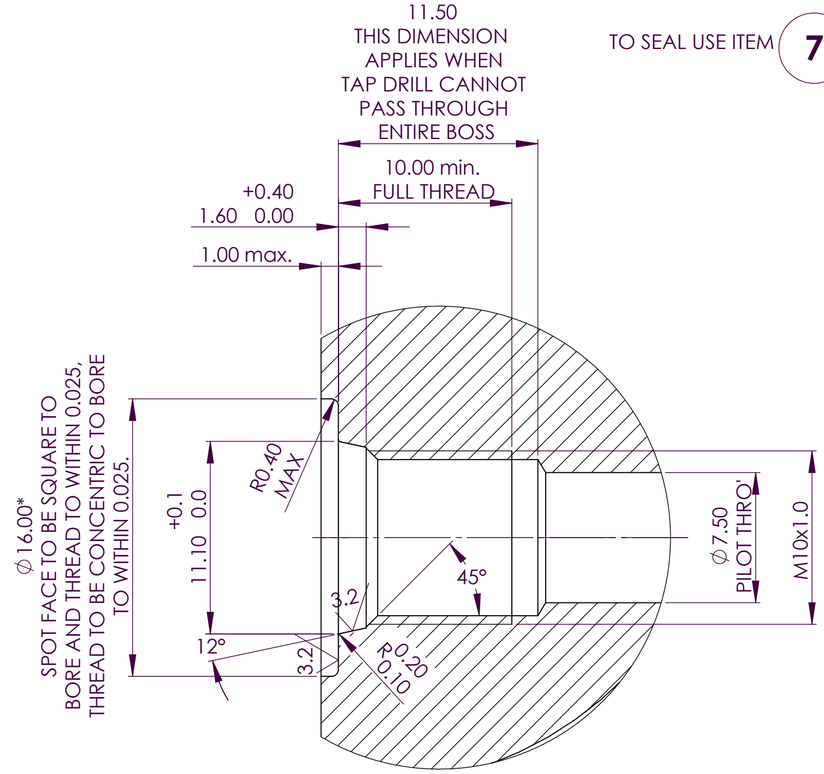

* IF FACE OF PORT IS MACHINED DIMENSIONS ø16.00 x 1.00 max NEED NOT APPLY AS LONG AS R0.2/0.1 IS MAINTAINED TO AVOID DAMAGE TO O-RING DURING INSTALATION.

METRIC
IF IN DOUBT ASK

ISS	DATE	DRAWN	ECR No.	CHK	APP
2B	09/02/11	S COLE	10426/22	M BENTLEY	M BENTLEY

SLEEVED CORE ASSEMBLY MACHINING DETAILS

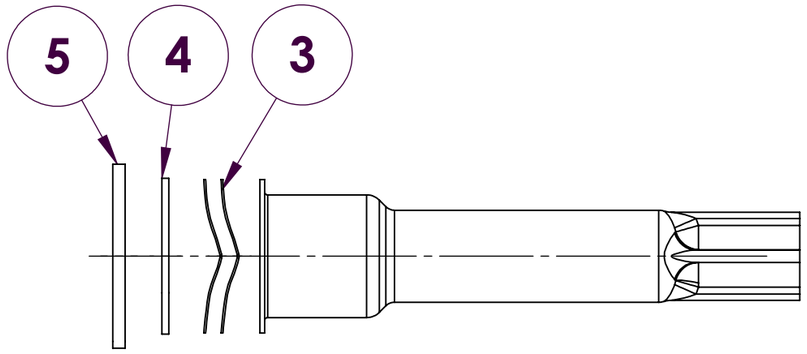

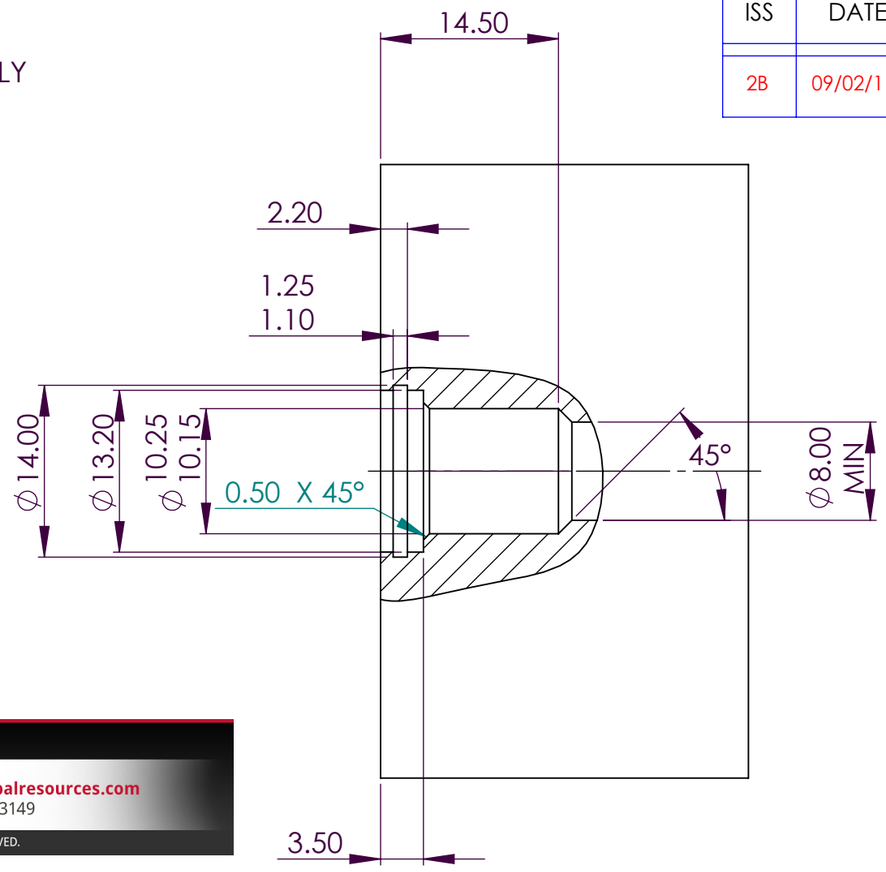

GS GLOBAL RESOURCES
Foremost in Machine Performance for Life
GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149
© GS GLOBAL REOURCES, INC. ALL RIGHTS RESERVED.

FORCE FIT CORE MACHINING DETAILS

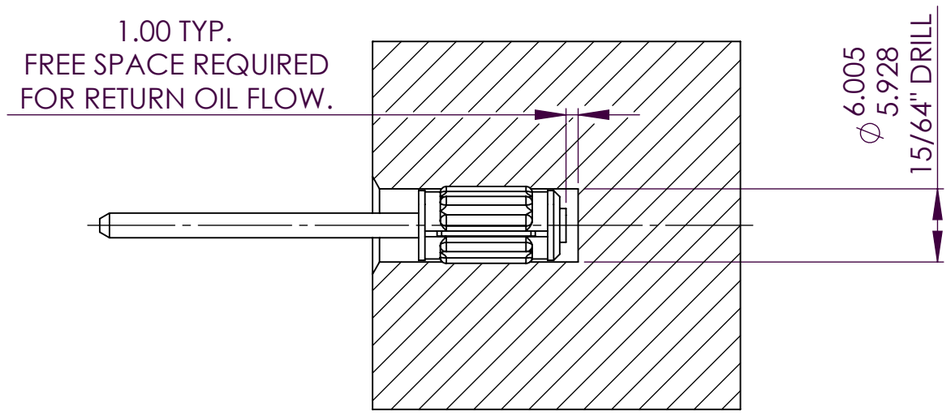

NOTE- INSTALATION TOOL
REQUIRED SEE P&G DRAWING T56726

THREADED CORE ASSEMBLY M5 x 0.8 OR 0.190-32 UNF

LOCK CORE ASSEMBLY WITH NUT **1** OR **2** AND LOCTITE 242.

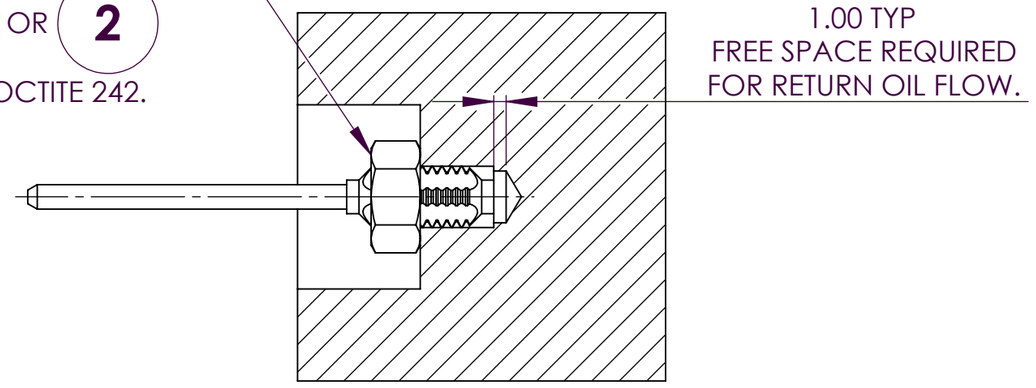

SCALE UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL.		D No ICT050	MATERIAL	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS 55-301 SURFACE TEXTURE VALUES IN MICROMETRES (µm) TO BS1134:PT2. ALL MACHINED SURFACES TO BE 1.6 ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H ANGULAR ± 1° · LINEAR 0, mm / 0,0 mm / 0,00mm / 0,000mm · (MACHINING) +/- 0,5 mm / +/- 0,2 mm / +/- 0,1mm / +/- 0,01mm · BREAK EDGE 0.05 - 0.15mm · FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED
THIRD ANGLE PROJECTION TO BS 8888	MASS (g)	VOL. (mm^3)	REF. AI56140	FINISH	

TITLE
SUGGESTED ICT050 INSTALLATION DETAILS AND INSTALLATION KIT 'H' TEMP RANGE

PENNY + GILES

PART NUMBER:
AI203558

A3

SHT 2 OF 2 SHTS

SolidWorks

REPRODUCTION OF ANY PART OF THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR PERMISSION FROM PENNY & GILES. © DESIGN COPYRIGHT RESERVED. CONFIDENTIAL AND PROPRIETARY INFORMATION OF PENNY & GILES.

METRIC
IF IN DOUBT ASK

ISS	DATE	DRAWN	ECR No.	CHK	APP
1	09/02/11	S COLE	10426/22	M BENTLEY	M BENTLEY

PISTON ROD END DETAIL TO ASSIST
BLIND LOADING OF LONGER STROKE
INTERNAL FLANGE OPTIONS

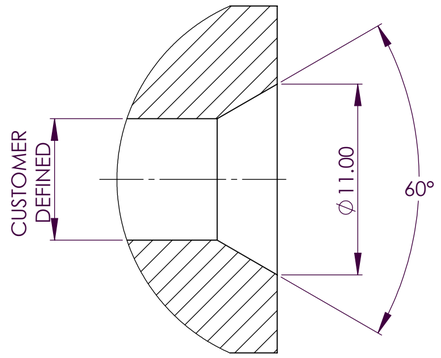

ITEM NO.	DESCRIPTION	P&G PART No.	QTY.
1	THIN NUT M5x0.8	X63-072-050	1
2	FULL NUT 0.190-32 UNF	X63-111-003	1
3	WAVEY WASHER - ELP2	X63-112-002	2
4	SHIM WASHER	P55044/3	1
5	CIRCLIP D1300-0130	X69-005-109	1
6	O'RING BROWN(7.65x1.63)	X64-213-014	1
7	O'RING (8.1x1.6)	X64-213-015	1
8	O'RING (7x2)	X64-213-016	1
9	ANTI EXTRUSION RING	X64-081-001	1
10	M3x0.5 CONICAL SET SCREW	X63-096-305	1
11	COPY OF AI208549	AI208549	1
12	LABEL (SUPPLIED LOOSE)	P200919	1
13	INSTALATION KIT LABEL	P208550	1
14	ALTERNATE CABLE GLAND SEAL	X61-213-202	1

ITEM 12, LABEL, IS SUPPLIED FOR THE CUSTOMER TO RECORD ICT ORDERING CODE
AND TO BE FITTED IN VISIBLE LOCATION ADJACENT TO SENSOR FOR RE-ORDERING REFERENCE.

ITEM 14, ALTERNATE CABLE GLAND SEAL, IS SUPPLIED FOR CONNECTING ICT050 DIRECT TO EICTM.

BECAUSE OF THE MULTIPLICITY OF POTENTIAL APPLICATION, THE
INSTALLATION DETAILS SHOWN ARE SUGGESTIONS ONLY.
THE USER SHOULD ENSURE THAT THE DESIGN, METHOD OF ASSEMBLY
AND MATERIALS USED ARE SATISFACTORY FOR THE INSTALLATION.

GS GLOBAL RESOURCES
Foremost in Machine Performance for Life
GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149
© GS GLOBAL RESOURCES, INC. ALL RIGHTS RESERVED.

INTERNAL FLANGE
MACHINING DETAILS

TO SEAL USE ITEMS 8 & 9

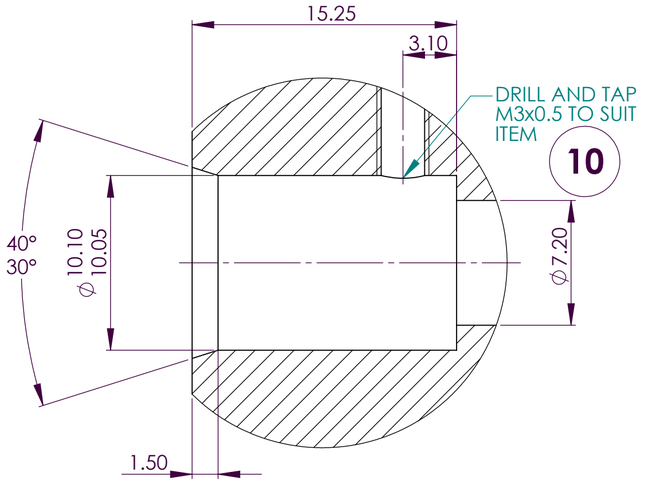

MACHINING DETAILS FOR UNIFIED FLANGE.
PORT CONFORMS TO SAE J1926/1, CONNECTIONS FOR FLUID POWER AND GENERAL USE - PORTS AND STUD ENDS WITH ISO 725 THREADS AND O'RING SEALING - PART 1: THREADED PORTS WITH O'RING SEAL IN TRUNCATED HOUSING

SUITABLE PORT CUTTERS ARE AVAILABLE FOR THESE DETAILS.....

TO SEAL USE ITEM 6

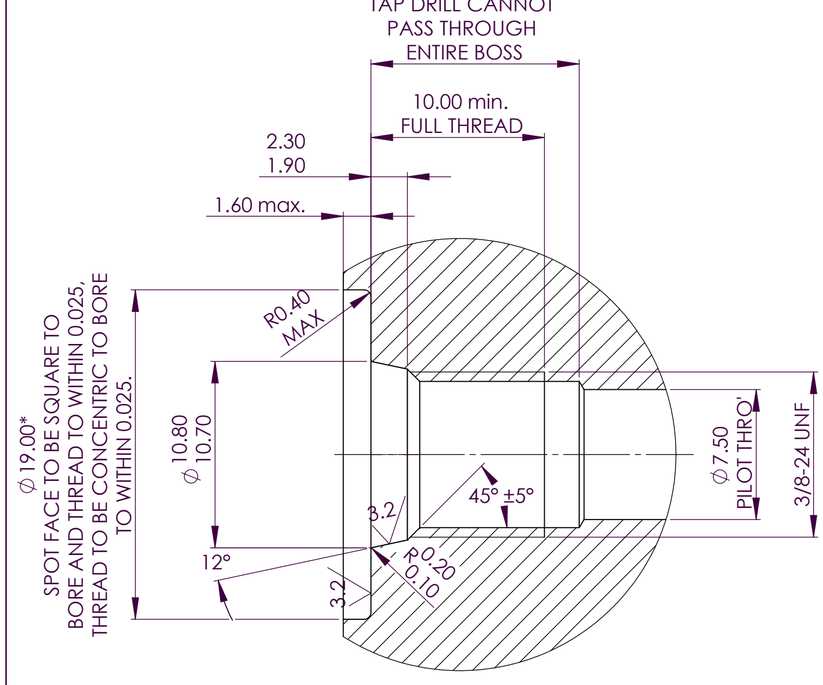

* IF FACE OF PORT IS MACHINED DIMENSIONS ø19.00 x 1.6 max NEED NOT APPLY AS LONG AS R0.2/0.1 IS MAINTAINED TO AVOID DAMAGE TO O-RING DURING INSTALATION.

MACHINING DETAILS FOR METRIC FLANGE.
PORTS CONFORM TO ISO 6149-1:1993, CONNECTIONS FOR FLUID POWER AND GENERAL USE - PORTS AND STUD ENDS WITH ISO 261 THREADS AND O'RING SEALING - PART 1: PORTS WITH O'RING SEAL IN TRUNCATED HOUSING

SUITABLE PORT CUTTERS ARE AVAILABLE FOR THESE DETAILS.....

TO SEAL USE ITEM 7

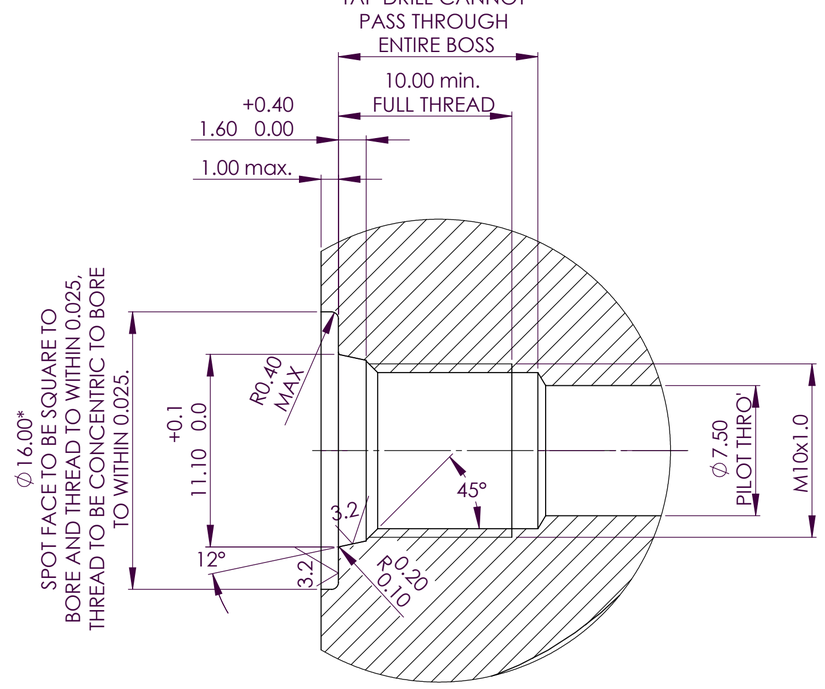

* IF FACE OF PORT IS MACHINED DIMENSIONS ø16.00 x 1.00 max NEED NOT APPLY AS LONG AS R0.2/0.1 IS MAINTAINED TO AVOID DAMAGE TO O-RING DURING INSTALATION.

SCALE UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL.	D No. ICT050	MATERIAL	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS 55-301 SURFACE TEXTURE VALUES IN MICROMETRES (.m) TO BS1134:PT2. ALL MACHINED SURFACES TO BE 1.6 ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H ANGULAR ± 1° / LINEAR 0. mm, 0.0 mm, 0,00mm, 0,000mm / (MACHINING) +/- 0,5 mm, +/- 0,2 mm, +/- 0,1mm, +/- 0,01mm BREAK EDGE 0.05 - 0.15mm FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED	TITLE SUGGESTED ICT050 INSTALLATION DETAILS AND INSTALLATION KIT 'L' TEMP RANGE	PENNY + GILES	A2
THIRD ANGLE PROJECTION TO BS 8888	MASS (g) / VOL. (mm³)	REF. AI56140	FINISH		PART NUMBER: AI208549	SHT 1 OF 2 SHTS

REPRODUCTION OF ANY PART OF THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR PERMISSION FROM PENNY & GILES. © DESIGN COPYRIGHT RESERVED. CONFIDENTIAL AND PROPRIETARY INFORMATION OF PENNY & GILES.

SolidWorks

METRIC
IF IN DOUBT ASK

ISS	DATE	DRAWN	ECR No.	CHK	APP
1	09/02/11	S COLE	10426/22	M BENTLEY	M BENTLEY

SLEEVED CORE ASSEMBLY MACHINING DETAILS

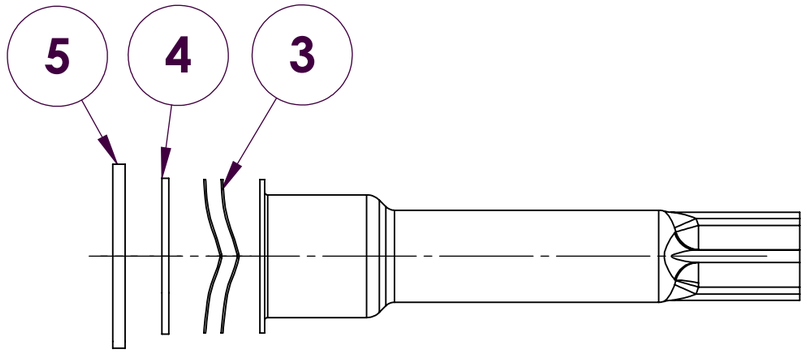

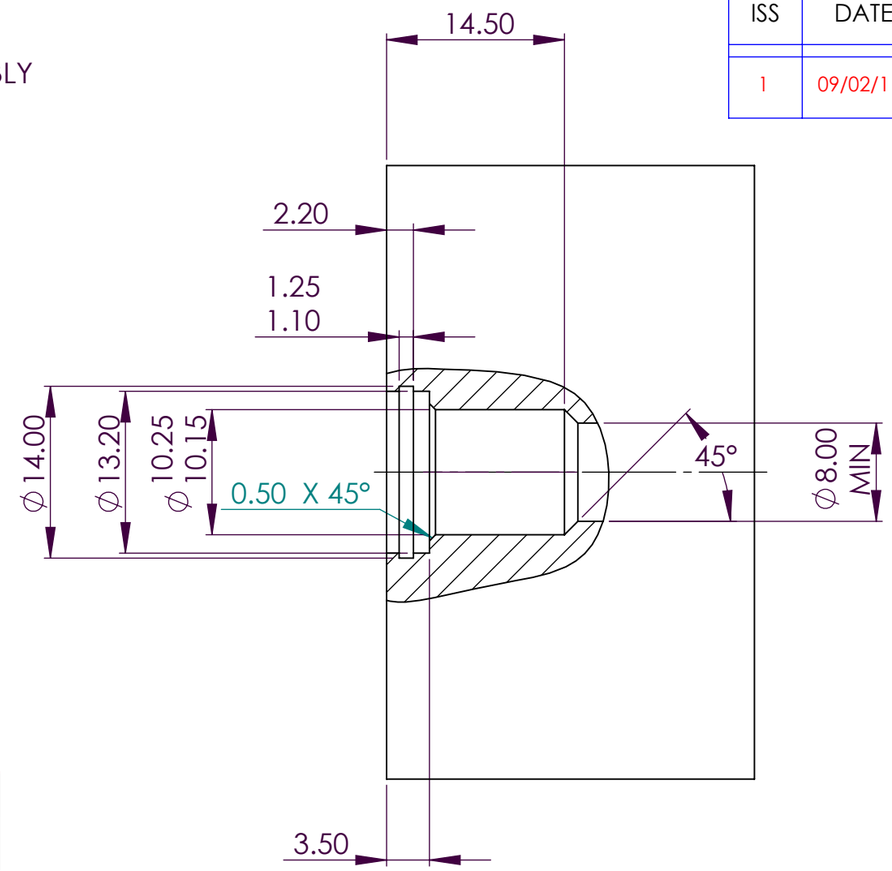

GS GLOBAL RESOURCES
Foremost in Machine Performance for Life
GS Global Resources • 1-800-261-8735 • gsglobalresources.com
926 Perkins Drive, Mukwonago, WI 53149
© GS GLOBAL REOURCES, INC. ALL RIGHTS RESERVED.

FORCE FIT CORE MACHINING DETAILS

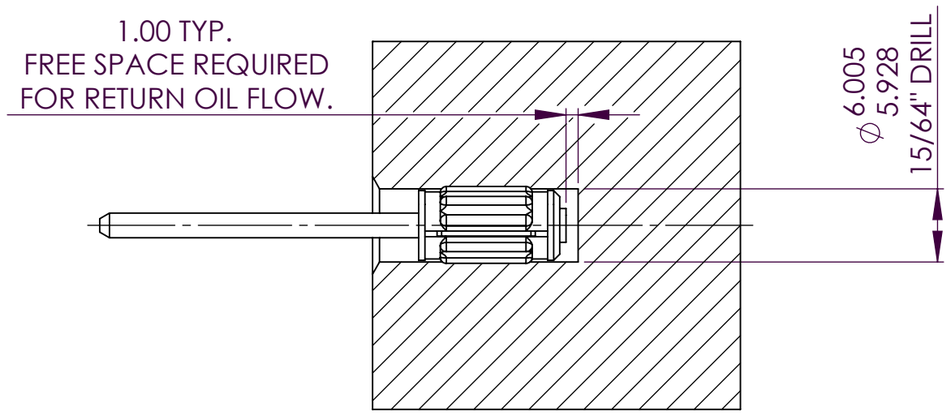

NOTE- INSTALATION TOOL
REQUIRED SEE P&G DRAWING T56726

THREADED CORE ASSEMBLY M5 x 0.8 OR 0.190-32 UNF

LOCK CORE ASSEMBLY WITH NUT **1** OR **2** AND LOCTITE 242.

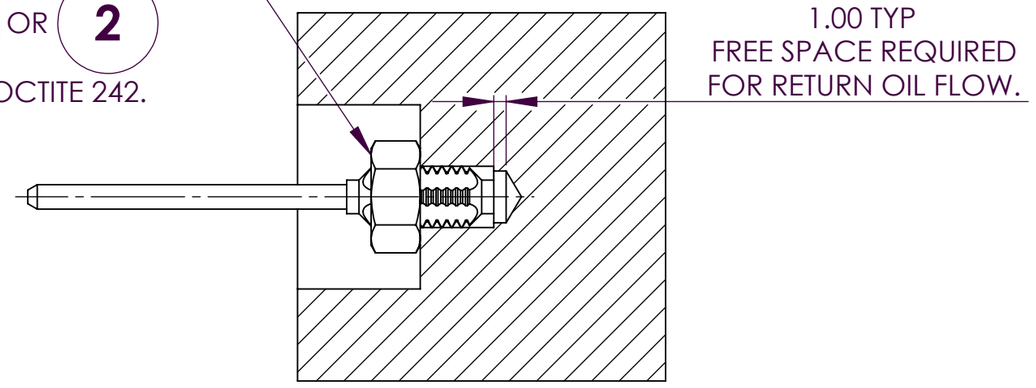

SCALE UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL.		D No ICT050 FIRST USED ON	MATERIAL	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS 55-301 SURFACE TEXTURE VALUES IN MICROMETRES (µm) TO BS1134:PT2. ALL MACHINED SURFACES TO BE 1.6 ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H ANGULAR ± 1° · LINEAR 0, mm +/- 0,5 mm · 0,0 mm +/- 0,2 mm · 0,00mm +/- 0,1mm · 0,000mm +/- 0,01mm · (MACHINING) BREAK EDGE 0.05 - 0.15mm FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED	TITLE SUGGESTED ICT050 INSTALLATION DETAILS AND INSTALLATION KIT 'L' TEMP RANGE	PENNY + GILES	A3
THIRD ANGLE PROJECTION TO BS 8888	MASS (g)	VOL. (mm^3)	REF. AI56140	FINISH		PART NUMBER: AI208549	SHT 2 OF 2 SHTS

REPRODUCTION OF ANY PART OF THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR PERMISSION FROM PENNY & GILES. © DESIGN COPYRIGHT RESERVED. CONFIDENTIAL AND PROPRIETARY INFORMATION OF PENNY & GILES.

SolidWorks