

# BREATHERS & FILLER BREATHERS

## TOP MOUNT — STANDARD FLOW


Top Mount Filler Breathers are designed to be used as a filler port for tanks, hydraulic power units or other fluid containers. These units also let the tank breathe while keeping out airborne particles.

### Standard Features:



- Bayonet zinc plated steel cap - large capacity
- Twist to lock removable cap breathes and filters air
- Concealed air vents allowing for outdoor applications
- Flute finger inserts for easy gripping (vented style only)
- 10 or 40 micron filtration (vented style only)
- Safety chain - prevents loss of cap
- Heavy duty Cork-Neoprene gasket provides a positive seal between flanges
- Zinc plated flange - bayonet flange (SAE J829)
- Strainer basket
  - 4 inch long Nylon with solid dome bottom to prevent punchout
  - 3 inch long Stainless Steel, 30 mesh
- Thread forming screws -- prevents particles from entering reservoir during installation by forming threads rather than cutting them




### Standard Bayonet Style

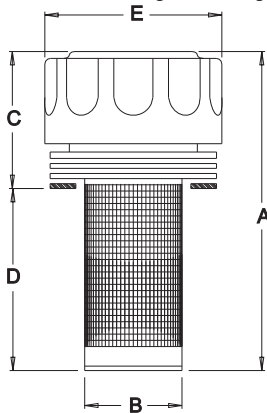

### Mounting Information

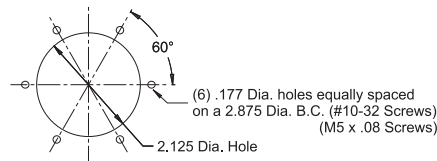

### Non Vented Bayonet Style

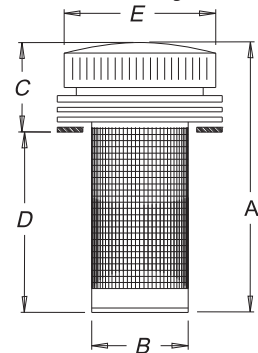

NOTE: All dimensions are inches

### Technical and Dimensional Details

Part No.	Cap Style	Breather (PSI)	Strainer Basket Type	Air Filtration		Air Flow Capacity (CFM)	Oil Transfer Rate (GPM)	Bayonet Flange (inches)														
				Nominal Level	Media			A	B	C	D	E	F	G								
<b>Non-Pressurized, Standard Filler Breather - Bayonet Style</b>																						
5201	Standard	N/A	Nylon	40 Micron	Foam	25	192	6.10	1.90	2.30	3.80	3.00	3.25	2.88								
5204	Standard	N/A	Nylon	10 Micron	Foam	15	115	6.10	1.90	2.30	3.80	3.00	3.25	2.88								
5216	Standard	N/A	Stainless Steel	40 Micron	Foam	25	192	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
5220	Standard	N/A	Stainless Steel	10 Micron	Foam	15	115	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
<b>Pressurized, Standard Filler Breather - Bayonet Style</b>																						
5205	Standard	5	Stainless Steel	10 Micron	Foam	25	192	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
<b>Non-Pressurized, Non-Vented Filler Breather - Bayonet Style</b>																						
5232	Non Vented	N/A	Nylon	N/A	N/A	N/A	N/A	6.10	1.90	1.30	3.80	2.44	3.25	2.88								
5227	Non Vented	N/A	Stainless Steel	N/A	N/A	N/A	N/A	5.10	1.90	1.30	2.80	2.44	3.25	2.88								
<b>Non-Pressurized, Metric Mounting Filler Breather - Bayonet Type</b>																						
5203	Standard	N/A	Nylon	40 Micron	Foam	25	192	6.10	1.90	2.30	3.80	3.00	3.25	2.88								

### Ordering Information Options

- For Locking Tabs add LT to part number (3/8 inch dia. hole to accept padlock)(not available in non vented breathers)

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

07/17

Ph : 920-682-6877  
Fx : 920-684-7210



sales@ldi-industries.com  
www.ldi-industries.com